

Submit 1 Copy To Appropriate District
Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87400
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised August 1, 2011

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☐ Other INJECTION

2. Name of Operator
XTO ENERGY, INC. ATTN: STEPHANIE RABADUE

3. Address of Operator
200 N. LORRAINE, SUITE 800, MIDLAND, TEXAS 79701

4. Well Location
Unit Letter U: 940 feet from the SOUTH line and 940 feet from the WEST line
Section 04 Township 21S Range 36E NMPM County LEA

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3,581' - GR

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC.. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1) TAG EXISTING 4-1/2" CIBP @ + CMT. @ +/-3,530'; CIRC. WELL W/ PXA MUD; PRES. TEST 4-1/2" CSG. TO 500#.
- 2) PUMP A 25 SX. CMT. PLUG @ 3,030'-2,830' (T/YATES); WOC X TAG CMT. PLUG.
- 3) PERF. X ATTEMPT TO SQZ. A 50 SX. CMT. PLUG @ 1,320'-1,190' (T/ANHY. X 8-5/8" CSG.SHOE); WOC X TAG.
- 4) PERF. X CIRC. TO SURF. A 50 SX. CMT. PLUG @ 150'-3'.
- 5) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; WELD ON STEEL PLATE TO CSGS. X INSTALL DRY HOLE MARKER.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David A. Eyler TITLE AGENT DATE 10/09/12

DEYLER@MILAGRO-RES.COM

Type or print name DAVID A. EYLER E-mail address: DEYLER@MILAGRO-RES.COM PHONE (432) 687-3033

For State Use Only

APPROVED BY Mark W. Pritchett TITLE Compliance Officer DATE 10-19-2012

Conditions of Approval (if any):

Oil Conservation Division - Hobbs office **Must be Notified**
24 hours prior to the beginning of Plugging Operations begin

WELL NAME: EMSU 258
LOCATION: 940 FSL & 940 FEL, SEC 4 T21S R36E
FORMATION: GRBG-SNDR
SPUD DATE: 03/06/65
IP:

COUNTY/STATE: LEA, NM
LEASE: EUNICE MONUMENT
CURRENT STATS: TA'D
COMPL DATE: 04/12/65
API No: 30-025-21251



940 FSL X 940 FW

ELEV
GL: 3581'
KB: 3596'

11" HOLE

8-5/8" 24#, CSG @ 1246'
CMT W/375 SX
CIRC TO SURF W/35 SX

TOC @ 2400' (CALC)

CIBP @ 3560'
CAP W/30' CMT

CIBP @ 3827'

CIBP @ 3920'
CAP W/1 SX CMT

7 7/8" HOLE


4-1/2", 11.6#, J55 CSG @ 6024'
CMT W/550
CIRC TO 2400' (CALC)

FLOAT COLLAR @ 5994

Perforations:

GRBG 3659'-61' - SQZ 3/18/98
3666'-68' - SQZ 3/18/98
3691'-93' - SQZ 3/18/98
3711'-13' - SQZ 3/18/98
3737'-39'
3751'-53'
3752'-62'
3768'-71'
3778'-86'
3792'-3800'
3807'-09'
3814'-17'
3829'-31'
3840'-42'
3845'-48'

BLBR 5872'-74'
5903'-05'
5924'-26'
5947'-49'

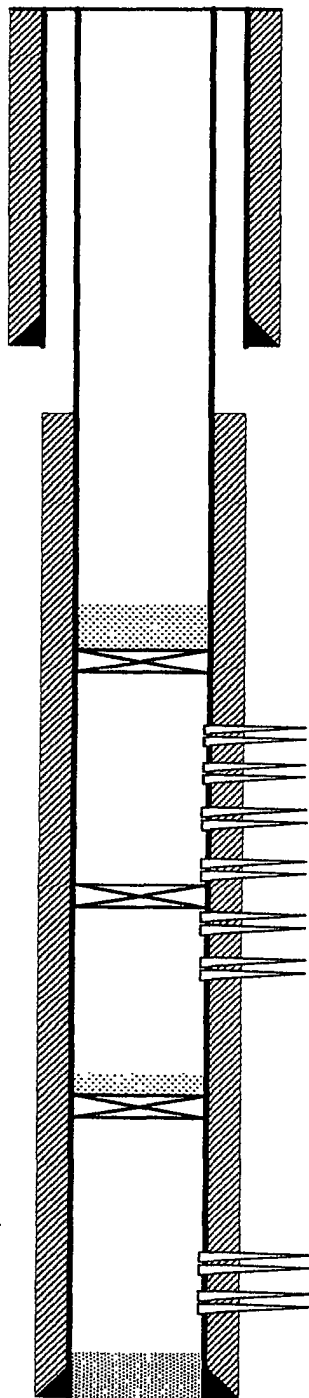

PBTD: 3560'
TD: 6025'

WELL NAME: EMSU 258
 LOCATION: 940 FSL & 940 FEL, SEC 4 T21S R36E
 FORMATION: GRBG-SNDR
 SPUD DATE: 03/06/65
 IP:


COUNTY/STATE: LEA, NM
 LEASE: EUNICE MONUMENT
 CURRENT STATS: TA'D
 COMPL DATE: 04/12/65
 API No: 30-025-21251



ELEV
 GL: 3581'
 KB: 3596'

11" HOLE

8-5/8" 24#, CSG @ 1246'
 CMT W/375 SX
 CIRC TO SURF W/35 SX



TOC @ 2400' (CALC)

CIBP @ 3560'
 CAP W/30' CMT


CIBP @ 3827'

CIBP @ 3920'
 CAP W/1 SX CMT

7 7/8" HOLE

4-1/2", 11.6#, J55 CSG @ 6024'
 CMT W/550
 CIRC TO 2400' (CALC)

FLOAT COLLAR @ 5994

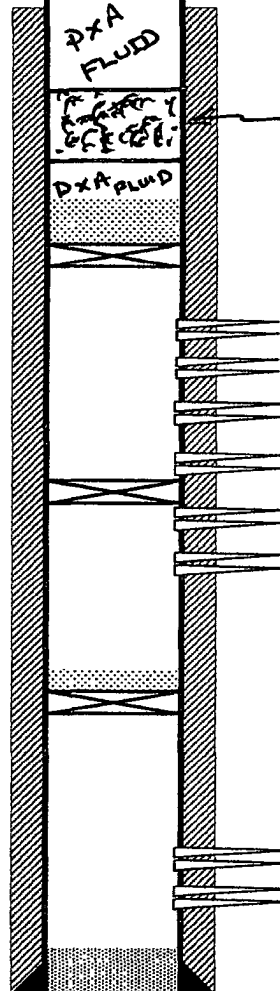

Perforations:

GRBG 3659'-61' - SQZ 3/18/98
 3666'-68' - SQZ 3/18/98
 3691'-93' - SQZ 3/18/98
 3711'-13' - SQZ 3/18/98
 3737'-39'
 3751'-53'
 3752'-62'
 3768'-71'
 3778'-86'
 3792'-3800'
 3807'-09'
 3814'-17'
 3829'-31'
 3840'-42'
 3845'-48'

BLBR 5872'-74'
 5903'-05'
 5924'-26'
 5947'-49'

PBTD: 3560'
 TD: 6025'

DAE 10/09/12