


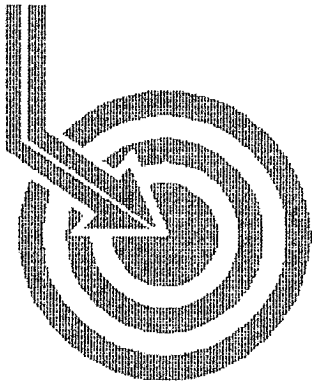

Scientific Drilling

SUR: E-6-25s-34e, 2140/N & 330/W
BHL: F-6-25s-34e, 1784/N & 2310/W
API #30-025-36629

E.O.G.

Field: Diamond
Site: Lea County, NM
Well: Diamond 6 Fed #2
Wellpath: VH - Job #32K1204796
Survey: 12/14/04



This survey is correct to the best of my knowledge
and is supported by actual field data.

Bicky Martin.....Company Representative

Notorized this date 27th of January, 2005.

Deborah Sue Bynum

Notary Signature
County of Midland
State of Texas

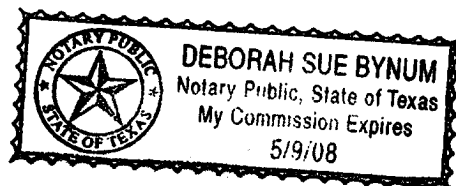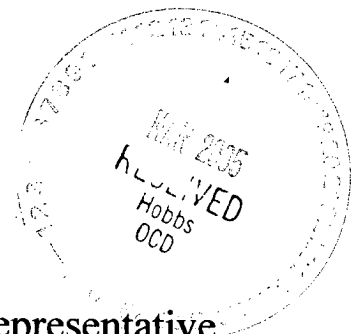



Scientific Drilling International Survey Report

Company: E.O.G.	Date: 1/25/2005	Time: 13:49:04	Page: 1
Field: Diamond	Co-ordinate(NE) Reference:	Site: Lea County, NM, Grid North	
Site: Lea County, NM	Vertical (TVD) Reference:	SITE: 0.0	
Well: Diamond 6 Fed #2	Section (VS) Reference:	Well: (0.00N,0.00E,56.16Azi)	
Wellpath: VH - Job #32K1204796	Survey Calculation Method:	Minimum Curvature	Db: Sybase

Survey: 12/14/04	Start Date: 12/14/2004
KSRG 0'-12260'	
Company: Scientific Drilling Internatio	Engineer: Foster/Gonzales w/P&M
Tool: Keeper;Keeper Surface Readout Gyro	Tied-to: From Surface

Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClsD ft	ClsA deg
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.0	0.00
100.0	0.23	25.74	100.0	0.2	0.2	0.1	0.23	0.2	25.74
200.0	0.06	109.08	200.0	0.4	0.3	0.2	0.23	0.4	33.01
300.0	0.19	76.29	300.0	0.6	0.4	0.4	0.14	0.6	49.83
400.0	0.09	149.05	400.0	0.7	0.3	0.6	0.18	0.7	61.96
500.0	0.21	71.69	500.0	0.9	0.3	0.9	0.21	0.9	68.86
600.0	0.13	113.73	600.0	1.1	0.3	1.1	0.14	1.2	73.19
700.0	0.26	64.20	700.0	1.4	0.4	1.4	0.20	1.5	74.67
800.0	0.24	70.48	800.0	1.8	0.6	1.8	0.03	1.9	72.98
900.0	0.45	86.89	900.0	2.4	0.7	2.4	0.23	2.5	74.92
1000.0	0.08	83.78	1000.0	2.8	0.7	2.9	0.37	3.0	76.70
1100.0	0.38	81.70	1100.0	3.1	0.7	3.3	0.30	3.4	77.34
1200.0	0.28	110.14	1200.0	3.6	0.7	3.8	0.19	3.9	79.65
1300.0	0.27	76.82	1300.0	3.9	0.7	4.3	0.16	4.4	81.13
1400.0	0.44	77.19	1400.0	4.5	0.8	4.9	0.17	5.0	80.62
1500.0	0.08	83.70	1500.0	4.9	0.9	5.4	0.36	5.4	80.42
1600.0	0.29	80.57	1600.0	5.2	1.0	5.7	0.21	5.7	80.47
1700.0	0.21	126.70	1700.0	5.5	0.9	6.1	0.21	6.1	81.71
1800.0	0.07	299.50	1800.0	5.6	0.8	6.2	0.28	6.2	82.56
1900.0	0.26	71.92	1900.0	5.8	0.9	6.3	0.31	6.4	81.85
2000.0	0.14	136.64	2000.0	6.0	0.9	6.6	0.24	6.7	82.37
2100.0	0.20	338.03	2100.0	6.1	1.0	6.6	0.33	6.7	81.77
2200.0	0.08	278.39	2200.0	6.0	1.1	6.5	0.17	6.6	80.13
2300.0	0.29	28.63	2300.0	6.2	1.4	6.6	0.33	6.7	78.25
2400.0	0.19	328.58	2400.0	6.4	1.7	6.6	0.26	6.8	75.31
2500.0	0.14	329.46	2500.0	6.5	2.0	6.4	0.05	6.7	72.97
2600.0	0.10	67.23	2600.0	6.5	2.1	6.5	0.18	6.8	71.89
2700.0	0.28	358.59	2700.0	6.8	2.4	6.5	0.26	7.0	69.91
2800.0	0.22	75.49	2800.0	7.1	2.7	6.7	0.31	7.2	68.22
2900.0	0.42	28.41	2900.0	7.6	3.1	7.1	0.31	7.7	66.66
3000.0	0.62	74.44	3000.0	8.4	3.5	7.8	0.45	8.5	65.62
3100.0	0.56	63.95	3100.0	9.4	3.9	8.7	0.12	9.6	66.04
3200.0	0.84	74.52	3200.0	10.6	4.3	9.9	0.31	10.8	66.52
3300.0	1.11	78.39	3299.9	12.2	4.7	11.5	0.28	12.4	67.90
3400.0	1.29	87.32	3399.9	14.0	4.9	13.6	0.26	14.5	70.08
3500.0	1.46	93.94	3499.9	16.0	4.9	16.0	0.23	16.7	72.99
3600.0	1.45	93.26	3599.9	18.0	4.7	18.5	0.02	19.1	75.67
3700.0	1.42	97.02	3699.8	20.0	4.5	21.0	0.10	21.5	77.89
3800.0	1.13	98.27	3799.8	21.6	4.2	23.2	0.29	23.6	79.71
3900.0	1.04	101.30	3899.8	23.0	3.9	25.1	0.11	25.4	81.17
4000.0	1.04	110.29	3999.8	24.2	3.4	26.8	0.16	27.1	82.77
4100.0	0.99	112.77	4099.8	25.2	2.8	28.5	0.07	28.6	84.47
4200.0	0.78	115.75	4199.7	26.0	2.1	29.9	0.21	30.0	85.93
4300.0	0.45	104.50	4299.7	26.6	1.7	30.9	0.35	30.9	86.79
4400.0	0.42	106.55	4399.7	27.1	1.5	31.6	0.03	31.7	87.23
4500.0	0.59	94.17	4499.7	27.8	1.4	32.5	0.20	32.5	87.55
4600.0	0.96	101.69	4599.7	28.8	1.2	33.8	0.38	33.8	88.00
4700.0	0.97	108.34	4699.7	29.9	0.7	35.4	0.11	35.5	88.79
4800.0	0.84	87.40	4799.7	31.0	0.5	37.0	0.35	37.0	89.21



Scientific Drilling International

Survey Report

Company: E.O.G.
Field: Diamond
Site: Lea County, NM
Well: Diamond 6 Fed #2
Wellpath: VH - Job #32K1204796

Date: 1/25/2005 Time: 13:49:04 Page: 2
Co-ordinate(NE) Reference: Site: Lea County, NM, Grid North
Vertical (TVD) Reference: SITE 0.0
Section (VS) Reference: Well (0.00N,0.00E,56.16Azi)
Survey Calculation Method: Minimum Curvature Db: Sybase

Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClsD ft	ClsA deg
4900.0	1.21	83.64	4899.7	32.6	0.7	38.8	0.38	38.8	89.02
5000.0	1.24	85.12	4999.7	34.4	0.9	40.9	0.04	40.9	88.78
5100.0	1.01	84.65	5099.6	36.2	1.0	42.8	0.23	42.9	88.60
5200.0	0.87	88.67	5199.6	37.6	1.1	44.5	0.15	44.5	88.52
5300.0	0.84	75.44	5299.6	38.9	1.3	46.0	0.20	46.0	88.32
5400.0	0.73	81.48	5399.6	40.2	1.6	47.3	0.14	47.3	88.03
5500.0	0.40	86.81	5499.6	41.1	1.7	48.3	0.33	48.3	87.94
5600.0	0.47	94.68	5599.6	41.7	1.7	49.0	0.09	49.1	87.98
5700.0	0.40	84.36	5699.6	42.3	1.7	49.8	0.10	49.8	88.01
5800.0	0.37	90.03	5799.6	42.9	1.8	50.5	0.05	50.5	88.00
5900.0	0.33	95.26	5899.6	43.4	1.7	51.1	0.05	51.1	88.05
6000.0	0.29	86.01	5999.6	43.8	1.7	51.6	0.06	51.6	88.08
6100.0	0.36	94.40	6099.6	44.3	1.7	52.2	0.08	52.2	88.11
6200.0	0.24	94.51	6199.6	44.7	1.7	52.7	0.12	52.7	88.17
6300.0	0.27	97.46	6299.6	45.0	1.6	53.1	0.03	53.2	88.24
6400.0	0.31	81.46	6399.6	45.5	1.6	53.6	0.09	53.7	88.25
6500.0	0.31	87.68	6499.6	45.9	1.7	54.2	0.03	54.2	88.21
6600.0	0.32	98.91	6599.6	46.4	1.7	54.7	0.06	54.7	88.26
6700.0	0.24	99.99	6699.6	46.7	1.6	55.2	0.08	55.2	88.36
6800.0	0.26	79.09	6799.6	47.1	1.6	55.6	0.09	55.7	88.37
6900.0	0.19	99.42	6899.6	47.4	1.6	56.0	0.11	56.0	88.36
7000.0	0.16	83.18	6999.6	47.7	1.6	56.3	0.06	56.3	88.38
7100.0	0.17	65.81	7099.6	47.9	1.7	56.6	0.05	56.6	88.31
7200.0	0.14	94.06	7199.6	48.2	1.7	56.8	0.08	56.9	88.26
7300.0	0.16	102.69	7299.6	48.4	1.7	57.1	0.03	57.1	88.31
7400.0	0.19	121.55	7399.6	48.5	1.6	57.4	0.06	57.4	88.44
7500.0	0.17	101.49	7499.6	48.7	1.4	57.7	0.07	57.7	88.56
7600.0	0.20	113.82	7599.6	48.9	1.3	58.0	0.05	58.0	88.67
7700.0	0.27	122.15	7699.6	49.1	1.2	58.3	0.08	58.3	88.87
7800.0	0.28	137.08	7799.6	49.2	0.8	58.7	0.07	58.7	89.17
7900.0	0.11	114.48	7899.6	49.3	0.6	59.0	0.18	59.0	89.39
8000.0	0.21	166.46	7999.6	49.3	0.4	59.1	0.17	59.1	89.60
8100.0	0.23	176.23	8099.6	49.1	0.0	59.1	0.04	59.1	89.97
8200.0	0.26	173.64	8199.6	48.9	-0.4	59.2	0.03	59.2	90.38
8300.0	0.09	146.20	8299.6	48.8	-0.7	59.2	0.18	59.3	90.66
8400.0	0.21	168.38	8399.6	48.8	-0.9	59.3	0.13	59.3	90.90
8500.0	0.31	161.44	8499.6	48.6	-1.4	59.5	0.10	59.5	91.31
8600.0	0.36	156.35	8599.6	48.5	-1.9	59.7	0.06	59.7	91.83
8700.0	0.50	141.42	8699.6	48.5	-2.5	60.1	0.18	60.1	92.42
8800.0	0.45	141.65	8799.6	48.5	-3.2	60.6	0.05	60.7	93.01
8900.0	0.45	144.03	8899.6	48.6	-3.8	61.1	0.02	61.2	93.57
9000.0	0.52	142.86	8999.6	48.6	-4.5	61.6	0.07	61.7	94.17
9100.0	0.57	138.06	9099.6	48.7	-5.2	62.2	0.07	62.4	94.80
9200.0	0.54	146.90	9199.5	48.8	-6.0	62.8	0.09	63.0	95.45
9300.0	0.59	140.96	9299.5	48.8	-6.8	63.3	0.08	63.7	96.11
9400.0	0.53	157.56	9399.5	48.8	-7.6	63.8	0.17	64.3	96.80
9500.0	0.74	153.64	9499.5	48.6	-8.6	64.3	0.21	64.9	97.63
9600.0	0.44	149.38	9599.5	48.5	-9.5	64.8	0.30	65.5	98.36
9700.0	0.44	174.77	9699.5	48.3	-10.2	65.0	0.19	65.8	98.95
9800.0	0.26	135.50	9799.5	48.2	-10.8	65.2	0.29	66.1	99.39
9900.0	0.19	337.37	9899.5	48.2	-10.8	65.3	0.44	66.2	99.38
10000.0	0.43	347.83	9999.5	48.4	-10.3	65.2	0.25	66.0	98.96



Scientific Drilling International


Survey Report

Company: E.O.G.
 Field: Diamond
 Site: Lea County, NM
 Well: Diamond 6 Fed #2
 Wellpath: VH - Job #32K1204796

Date: 1/25/2005 Time: 13:49:04 Page: 3
 Co-ordinate(NE) Reference: Site: Lea County, NM, Grid North
 Vertical (TVD) Reference: SITE 0.0
 Section (VS) Reference: Well (0.00N,0.00E,56.16Azi)
 Survey Calculation Method: Minimum Curvature Db: Sybase


Survey

MD ft	Incl deg	Azim deg	TVD ft	VS ft	N/S ft	E/W ft	DLS deg/100ft	ClsD ft	ClsA deg
10100.0	0.93	358.81	10099.5	49.0	-9.1	65.1	0.51	65.7	97.96
10200.0	0.94	15.90	10199.5	50.0	-7.5	65.3	0.28	65.7	96.55
10300.0	0.74	19.25	10299.5	51.2	-6.1	65.7	0.21	66.0	95.30
10400.0	0.54	44.70	10399.5	52.2	-5.1	66.3	0.34	66.5	94.44
10500.0	0.10	53.85	10499.5	52.7	-4.8	66.7	0.44	66.8	94.09
10600.0	0.33	241.30	10599.5	52.5	-4.8	66.5	0.43	66.6	94.17
10700.0	0.37	263.98	10699.5	51.9	-5.0	65.9	0.14	66.1	94.36
10800.0	0.27	266.64	10799.5	51.4	-5.1	65.3	0.10	65.5	94.44
10900.0	0.66	330.43	10899.5	51.3	-4.6	64.8	0.59	65.0	94.04
11000.0	0.84	351.35	10999.5	51.6	-3.4	64.4	0.32	64.5	92.98
11100.0	0.89	355.07	11099.5	52.3	-1.9	64.3	0.08	64.3	91.66
11200.0	1.44	338.80	11199.4	53.0	0.1	63.7	0.64	63.7	89.92
11300.0	1.58	337.26	11299.4	53.5	2.5	62.7	0.15	62.8	87.69
11400.0	1.85	327.71	11399.4	53.8	5.2	61.3	0.39	61.6	85.19
11500.0	2.93	319.09	11499.3	53.6	8.5	58.8	1.14	59.4	81.81
11600.0	2.87	318.41	11599.1	52.9	12.3	55.5	0.07	56.8	77.53
11700.0	2.61	310.69	11699.0	52.0	15.6	52.1	0.45	54.4	73.30
11800.0	2.63	308.58	11798.9	50.7	18.5	48.6	0.10	52.0	69.11
11900.0	2.39	312.74	11898.8	49.5	21.4	45.2	0.30	50.0	64.70
12000.0	1.60	316.24	11998.8	48.8	23.8	42.7	0.80	48.9	60.88
12100.0	1.07	283.00	12098.7	47.9	25.0	40.9	0.92	47.9	58.52
12200.0	0.99	284.33	12198.7	46.7	25.4	39.1	0.08	46.7	56.96
12260.0	0.80	275.16	12258.7	46.0	25.6	38.2	0.40	46.0	56.16




Scientific
Drilling

Field: Diamond
Site: Lea County, NM
Well: Diamond 6 Fed #2
Wellpath: VH - Job #32K1204796
Survey: 12/14/04

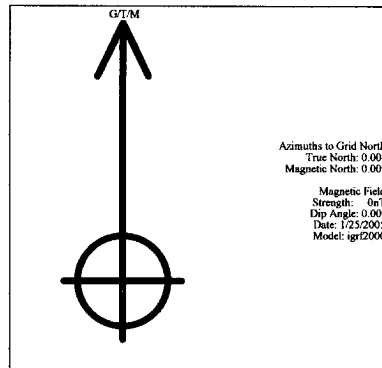

South(-)/North(+) [10ft/in]

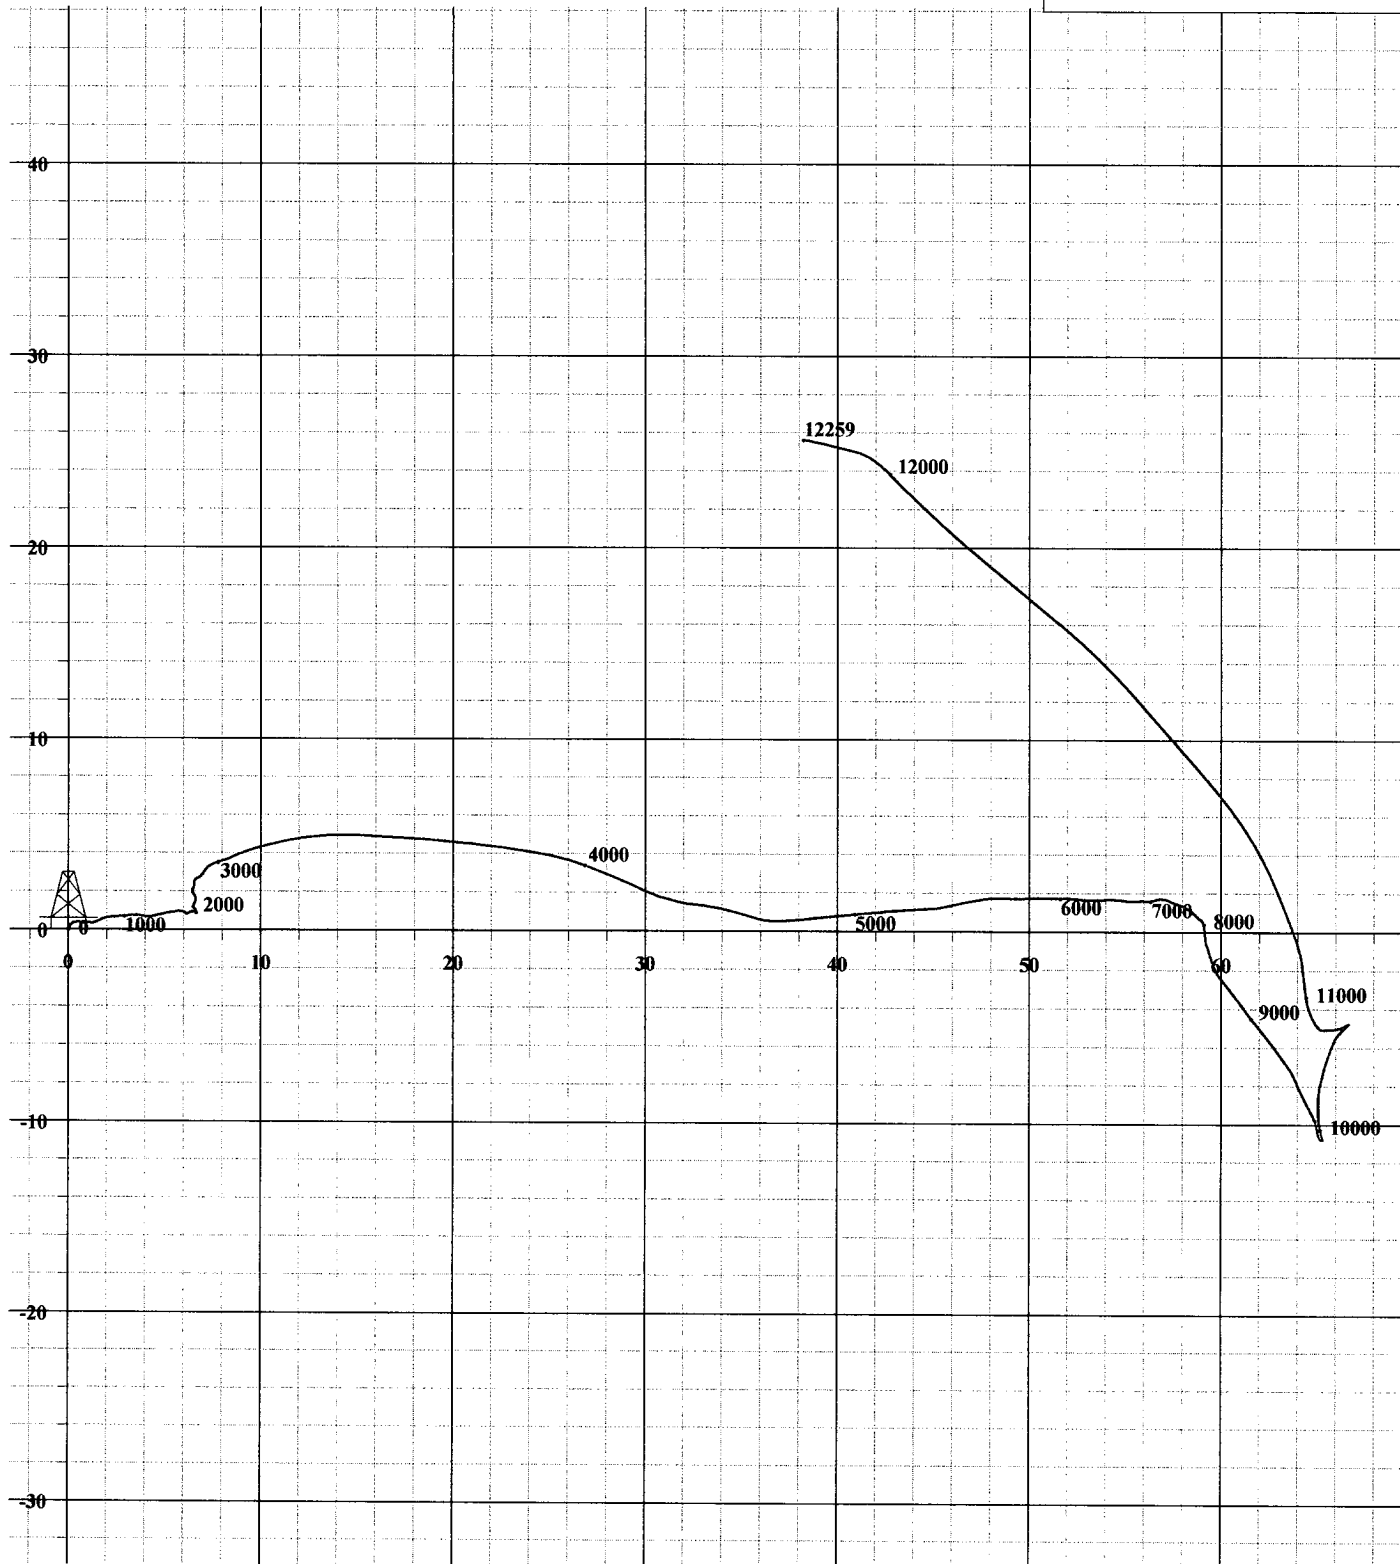

West(-)/East(+) [10ft/in]

PathFinder Energy Services

Survey Report

Page 1
Job No: JWT-0412-0181-WTWT
Date: 1/13/2005
Time: 6:49 pm
Wellpath ID: diamond6
Date Created: 12/27/2004
Last Revision: 1/13/2005

Calculated using the Minimum Curvature Method
Computed using PDS VER2.2.6
Vertical Section Plane: 80.63 deg.

Survey Reference: WELLHEAD
Vertical Section Reference: WELLHEAD
Closure Reference: WELLHEAD
TVD Reference: WELLHEAD

EOG Resources
Diamond 6 Fed Com #2
Key #92
Lea County, NM
Lea County, NM
diamond6_svy

Measured Depth (ft)	Incl (deg.)	Drift Dir. (deg.)	TVD (ft)	Vertical Section (ft)	Course Length (ft)	TOTAL Rectangular Offsets (ft)		Closure Dist. (ft)	Dir. (deg.)	DLS (dg/100ft)
11800.00	2.83	308.14	11798.92	50.86	0.00	18.91 N	48.43 E	51.98@	88.87	0.00
11977.00	15.74	61.35	11973.78	70.93	177.00	33.03 N	66.44 E	74.18@	63.56	9.87
12009.00	20.75	69.79	12004.17	80.80	32.00	37.07 N	75.57 E	84.18@	63.87	17.66
12041.00	26.12	77.79	12033.53	93.21	32.00	40.53 N	87.79 E	96.66@	65.22	19.47
12072.00	31.30	78.58	12060.71	108.09	31.00	43.57 N	102.36 E	111.25@	66.95	16.75
12102.00	34.91	80.42	12085.83	124.47	30.00	46.54 N	116.47 E	127.28@	68.55	12.49
12133.00	39.22	84.99	12110.57	143.12	31.00	48.87 N	136.99 E	145.45@	70.37	16.49
12165.00	42.58	85.52	12134.78	164.00	32.00	50.80 N	157.86 E	165.78@	72.23	10.49
12196.00	44.76	84.38	12157.18	185.34	31.00	52.49 N	179.18 E	186.71@	73.67	7.54
12228.00	47.92	84.56	12179.27	208.43	32.00	54.72 N	202.22 E	209.49@	74.86	9.88
12259.00	51.00	84.47	12199.42	231.83	31.00	56.97 N	225.67 E	232.75@	75.83	9.94
12291.00	55.31	83.85	12218.60	257.49	32.00	59.58 N	251.14 E	258.11@	76.65	13.56
12322.00	58.48	83.68	12235.53	283.41	31.00	62.40 N	276.95 E	283.86@	77.30	10.24
12354.00	61.47	83.68	12251.54	311.08	32.00	65.45 N	304.48 E	311.44@	77.87	9.34
12385.00	64.28	85.52	12265.68	338.80	31.00	68.04 N	331.95 E	338.85@	78.42	10.49
12416.00	67.80	84.64	12278.28	366.83	31.00	70.47 N	360.17 E	367.00@	78.93	11.65
12448.00	71.75	84.91	12289.33	396.78	32.00	73.21 N	390.08 E	396.87@	79.37	12.37
12479.00	75.36	83.76	12298.10	426.44	31.00	76.14 N	419.64 E	426.50@	79.72	12.18
12510.00	78.88	82.53	12305.01	456.63	31.00	79.75 N	449.84 E	456.66@	79.94	12.00
12542.00	81.25	82.27	12310.53	488.13	32.00	83.92 N	480.88 E	488.15@	80.10	7.45
12574.00	83.98	81.92	12314.64	519.85	32.00	88.28 N	512.31 E	519.86@	80.22	8.60
12605.00	87.49	83.69	12316.95	550.74	31.00	92.15 N	542.98 E	550.74@	80.37	12.67
12637.00	87.32	81.75	12318.40	582.68	32.00	96.20 N	574.69 E	582.68@	80.50	6.08
12669.00	85.12	79.29	12320.51	614.61	32.00	101.46 N	606.18 E	614.61@	80.50	10.30
12700.00	85.38	77.09	12323.07	645.47	31.00	107.79 N	636.41 E	645.48@	80.39	7.12
12732.00	85.21	73.05	12325.70	677.21	32.00	116.00 N	667.22 E	677.23@	80.14	12.59
12764.00	85.85	69.27	12328.25	708.66	32.00	126.30 N	697.41 E	708.75@	79.74	11.85
12796.00	88.90	69.80	12329.72	739.05	31.00	137.12 N	726.41 E	739.24@	79.31	10.62
12828.00	92.15	70.94	12329.44	769.54	31.00	147.54 N	755.60 E	769.87@	78.95	11.11
12858.00	94.62	72.61	12327.55	801.10	32.00	157.63 N	785.94 E	801.57@	78.67	9.31
12890.00	95.06	72.52	12324.85	832.67	32.00	167.08 N	816.36 E	833.28@	78.43	1.40
12921.00	96.90	74.28	12321.62	863.26	31.00	175.89 N	845.91 E	864.00@	78.25	8.19
12952.00	96.38	76.04	12318.04	893.91	31.00	183.77 N	875.67 E	894.75@	78.15	5.88
12983.00	96.11	76.57	12314.66	924.64	31.00	191.07 N	905.61 E	925.55@	78.09	1.91

PathFinder Energy Services

Survey Report

Page 2

Date: 1/13/2005

Wellpath ID: diamond8

Measured Depth (ft)	Incl (deg.)	Drift Dir. (deg.)	TVD (ft)	Vertical Section (ft)	Course Length (ft)	TOTAL Rectangular Offsets (ft)		Closure Dist. Dir. (ft) (deg.)		DLS (dg/100ft)
13014.00	96.29	77.97	12311.32	955.40	31.00	197.86 N	935.67 E	956.36@	78.06	4.53
13046.00	96.38	79.64	12307.78	987.19	32.00	204.04 N	966.87 E	988.16@	78.08	5.19
13077.00	96.02	80.61	12304.44	1018.01	31.00	209.32 N	997.23 E	1018.96@	78.15	3.32
13109.00	95.14	82.46	12301.33	1049.85	32.00	214.01 N	1028.73 E	1050.76@	78.25	6.38
13141.00	93.65	82.91	12298.87	1081.73	32.00	218.10 N	1060.37 E	1082.57@	78.38	4.78
13171.00	92.95	83.16	12297.16	1111.66	30.00	221.76 N	1090.10 E	1112.43@	78.50	2.61
13204.00	92.15	84.04	12295.68	1144.58	33.00	225.43 N	1122.86 E	1145.27@	78.66	3.60
13235.00	90.92	84.13	12294.85	1175.51	31.00	228.62 N	1153.68 E	1176.12@	78.79	3.98
13267.00	90.22	83.60	12294.53	1207.46	32.00	232.04 N	1185.50 E	1207.99@	78.93	2.74
13299.00	90.31	83.51	12294.38	1239.42	32.00	236.64 N	1217.30 E	1239.89@	79.04	0.40
13330.00	90.22	83.16	12294.24	1270.38	31.00	239.23 N	1248.09 E	1270.81@	79.15	1.17
13362.00	89.87	82.63	12294.21	1302.36	32.00	243.19 N	1279.84 E	1302.74@	79.24	1.98
13394.00	89.96	82.28	12294.26	1334.34	32.00	247.39 N	1311.58 E	1334.69@	79.32	1.13
13425.00	89.69	81.49	12294.36	1365.33	31.00	251.77 N	1342.25 E	1365.66@	79.38	2.69
13457.00	89.04	82.37	12294.43	1397.32	32.00	256.28 N	1373.93 E	1397.63@	79.43	2.96
13488.00	89.52	81.58	12294.56	1428.32	31.00	260.59 N	1404.63 E	1428.60@	79.49	3.06
13520.00	89.69	81.31	12294.77	1460.31	32.00	265.35 N	1436.27 E	1460.58@	79.53	1.00
13551.00	90.04	81.40	12294.84	1491.31	31.00	270.01 N	1466.92 E	1491.56@	79.57	1.17
13583.00	90.13	81.67	12294.80	1523.30	32.00	274.72 N	1498.57 E	1523.55@	79.61	0.89
13613.00	90.04	81.23	12294.75	1553.30	30.00	279.18 N	1528.24 E	1553.53@	79.65	1.50
13645.00	90.40	81.14	12294.83	1585.30	32.00	284.08 N	1559.86 E	1585.52@	79.68	1.16
13676.00	90.22	81.05	12294.46	1616.30	31.00	288.88 N	1590.49 E	1616.51@	79.71	0.65
13708.00	90.40	80.96	12294.29	1648.30	32.00	293.88 N	1622.09 E	1648.50@	79.73	0.63
13739.00	90.04	80.43	12294.17	1679.30	31.00	298.90 N	1652.68 E	1679.50@	79.75	2.07
13771.00	90.04	79.82	12294.15	1711.30	32.00	304.39 N	1684.21 E	1711.46@	79.76	1.91
13802.00	90.48	79.64	12294.00	1742.29	31.00	309.91 N	1714.71 E	1742.49@	79.76	1.53
13833.00	90.40	80.08	12293.77	1773.29	31.00	315.37 N	1745.23 E	1773.49@	79.76	1.44
13864.00	89.87	79.73	12293.69	1804.28	31.00	320.80 N	1775.75 E	1804.49@	79.76	2.05
13896.00	89.96	79.64	12293.74	1836.28	32.00	326.53 N	1807.23 E	1836.45@	79.76	0.40
13927.00	90.57	79.73	12293.60	1867.28	31.00	332.08 N	1837.73 E	1867.49@	79.76	1.89
13959.00	91.98	80.26	12292.89	1899.26	32.00	337.64 N	1869.23 E	1899.46@	79.76	4.71
13991.00	94.09	80.87	12291.19	1931.22	32.00	342.88 N	1900.75 E	1931.43@	79.77	6.86
14022.00	93.83	80.86	12289.05	1962.14	31.00	347.76 N	1931.29 E	1962.35@	79.79	0.89
14034.00	93.91	80.87	12288.24	1974.12	12.00	349.65 N	1943.11 E	1974.32@	79.80	1.00
Projection To The Bit 14071.00	93.91	80.87	12285.72	2011.03	37.00	355.51 N	1979.56 E	2011.23@	79.82	0.00