

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87401
District IV - (505) 476-3460
1220 S St Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised August 1, 2011

WELL API NO 30-025-24309
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. VB-1819
7. Lease Name or Unit Agreement Name Trucker BRK State
8. Well Number: #1H
9. OGRID Number 25575
10. Pool name or Wildcat Bell Lake 2nd Bone Spring/Wildcat 25130
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3667

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
Yates Petroleum Corporation

3. Address of Operator
105 S. Fourth St., Artesia, NM 88210

4. Well Location
Unit Letter L : 1980 feet from the S line and 660 feet from the W line
Section 2 Township 24S Range 33E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3667

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐
TEMPORARILY ABANDON ☐ CHANGE PLANS ☒
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Yates Petroleum Corporation is requesting to change the target zone of the Trucker BRK State #1H located 1980' FSL and 660' FWL in Section 2 of Township 24S and Range 33E. The original TD was 13836', we would like to change the TD to 15197' with the plug being set at 10650'. The new target zone is the 2nd Bone Spring. Production casing will now use 1150 sacks of cement with a setting depth of 15197'.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Travis Hahn TITLE Land Regulatory Agent DATE 10/15/2012

Type or print name Travis Hahn E-mail address: thahn@yatespetroleum.com PHONE: 575-748-4120

For State Use Only


APPROVED BY [Signature] TITLE Dist. MGR DATE 10-23-2012
Conditions of Approval (if any):

OCT 23 2012

Survey/Planning Report

Operator Dir. Co. Well Name Location Rig Job	Yates Petroleum Corp.			Northing Easting Elevation Latitude Longitude Units	Feet	Date System Datum Zone Scale Fac. Converg.	12-Oct-12		
	Yates Petroleum Corp.						2 - St. Plane		
	Trucker #1H Survey						1983 - NAD83		
	Sec. 2, 24S-33E						4302 - Utah Central		
MD	INC	AZI	TVD	+N/S-	+E/W-	VS@89.51°	BR	TR	DLS
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
1299.00	0.00	0.00	1299.00	0.00	0.00	0.00	0.00	0.00	0.00
1299' RUSTLER, 1299'									
4967.00	0.00	0.00	4967.00	0.00	0.00	0.00	0.00	0.00	0.00
4967' BOS, 4967'									
5261.00	0.00	0.00	5261.00	0.00	0.00	0.00	0.00	0.00	0.00
5261' BELL CANYON, 5261'									
6193.00	0.00	0.00	6193.00	0.01	0.00	0.00	0.00	0.00	0.00
6193' CHERRY CANYON, 6193'									
7969.00	0.00	0.00	7969.00	0.01	0.00	0.00	0.00	0.00	0.00
7969' BRUSHY CANYON, 7969'									
9043.00	0.00	0.00	9043.00	0.01	0.00	0.00	0.00	0.00	0.00
9043' BONE SPRING, 9043'									
9147.00	0.00	0.00	9147.00	0.01	0.00	0.00	0.00	0.00	0.00
9147' UPPER AVALON, 9147'									
9506.00	0.00	0.00	9506.00	0.01	0.00	0.00	0.00	0.00	0.00
9506' LOWER AVALON, 9506'									
10142.00	0.00	0.00	10142.00	0.01	0.00	0.00	0.00	0.00	0.00
10142' FBSG, 10142'									
10641.41	0.00	89.51	10641.41	0.01	0.00	0.00	0.00	0.84	0.00
10641.41' KOP, 10641'									
10700.00	7.03	89.51	10699.85	0.04	3.59	3.59	12.00	0.00	12.00
10800.00	19.03	89.51	10797.10	0.23	26.09	26.10	12.00	0.00	12.00
10886.65	29.43	89.51	10876.01	0.54	61.60	61.61	12.00	0.00	12.00
10886.65' SBSG, 10887' MD, (10876' TVD)									
10900.00	31.03	89.51	10887.54	0.60	68.33	68.33	12.00	0.00	12.00
11000.00	43.03	89.51	10967.23	1.11	128.44	128.44	12.00	0.00	12.00
11100.00	55.03	89.51	11032.68	1.76	203.80	203.81	12.00	0.00	12.00
11200.00	67.03	89.51	11081.02	2.51	291.12	291.14	12.00	0.00	12.00
11300.00	79.03	89.51	11110.16	3.33	386.59	386.61	12.00	0.00	12.00
11402.58	91.34	89.51	11118.74	4.21	488.61	488.63	12.00	0.00	12.00
11402.58' TARGET SBSG, 11403' MD (11119' TVD)									
15197.40	91.34	89.51	11030.00	36.84	4282.26	4282.42	0.00	0.00	0.00
15197.4' LATERAL TD, 15197' MD (11030' TVD)									



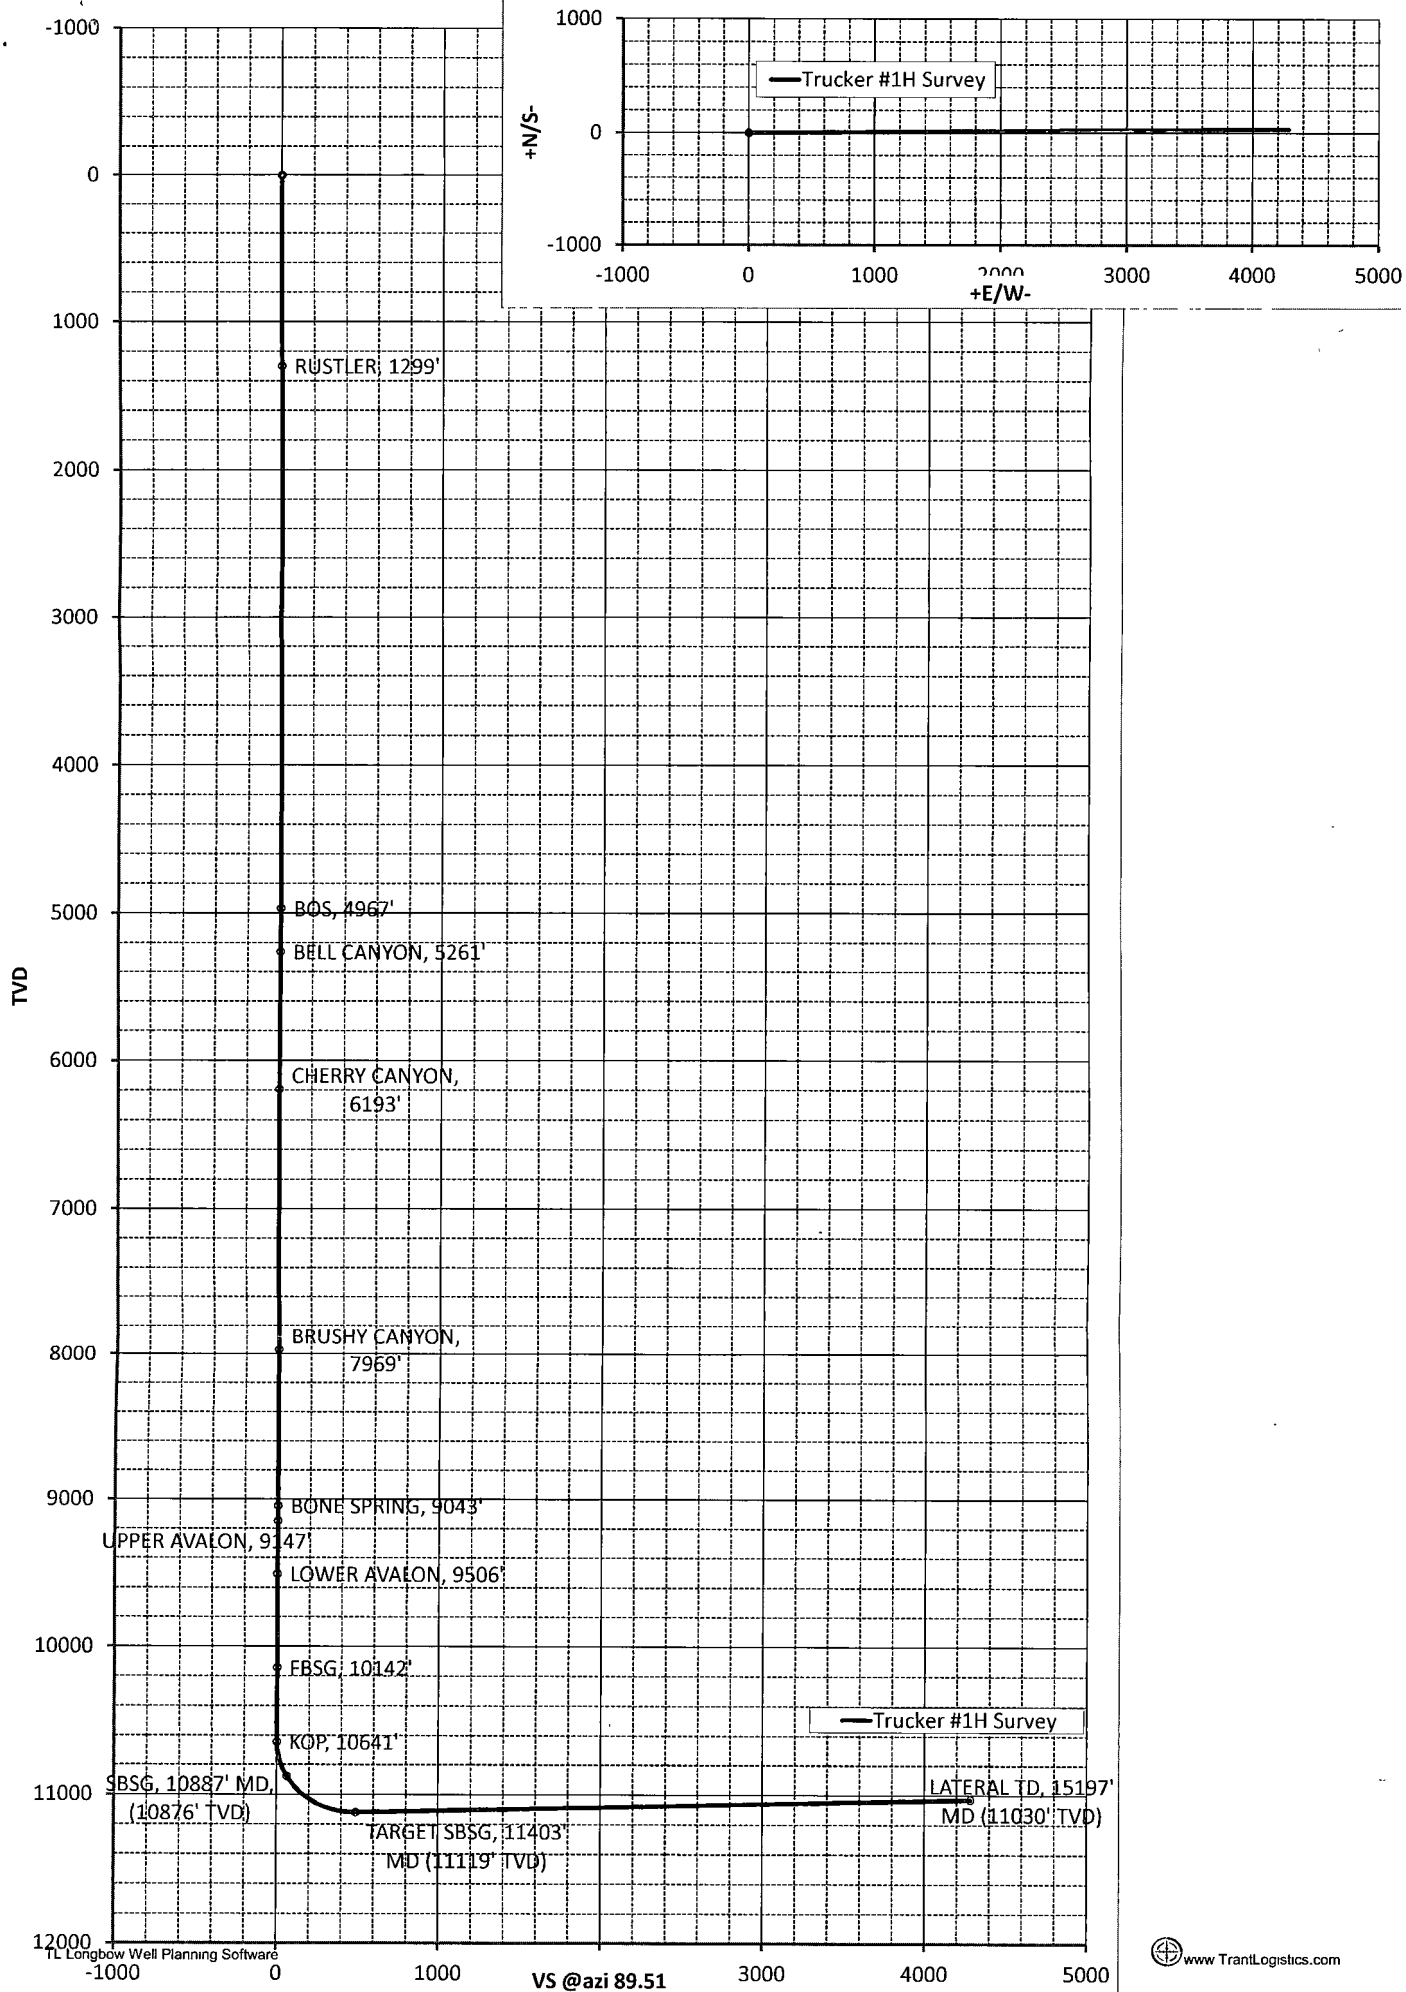

WELL NAME: Trucker BRK St #1H **FIELD:** Wildcat Bone Springs

LOCATION: 1980' FSL & 660' FWL of Section 2-24S-33E Lea County

GL: 3627' **ZERO:** **KB:** 3651'

SPUD DATE: 5/26/79 **COMPLETION DATE:** 11/28/79

COMMENTS: API: 30-025-26309
(Frmly Jog St Com #1)


CASING PROGRAM

16" 60# H-40	798'
10 3/4" 40.5# & 45.5# S80 ST&C & 45.5# K-55 STC	5,250'
7 5/8" 29.7# & 33.7# S-95 BT&C, LT&C, 33.7# P-110, LT&C	12,514'
5" liner, 23.2# P110 Hydrill SFJP	15,557'

Current

Fm. Tops:

Rustler : 1,300'
TOS : 1,410'
BOS : 3,290'
Bell Canyon : 5,260'
Cherry Canyon : 6,180'
Brushy Canyon : 7,610'
Br . Cny marker : 8,882'
Bone Springs : 9,047'
Avalon Shale : 10,023'
WC : 12,180'
Strawn : 13,620'
Atoka : 13,846'

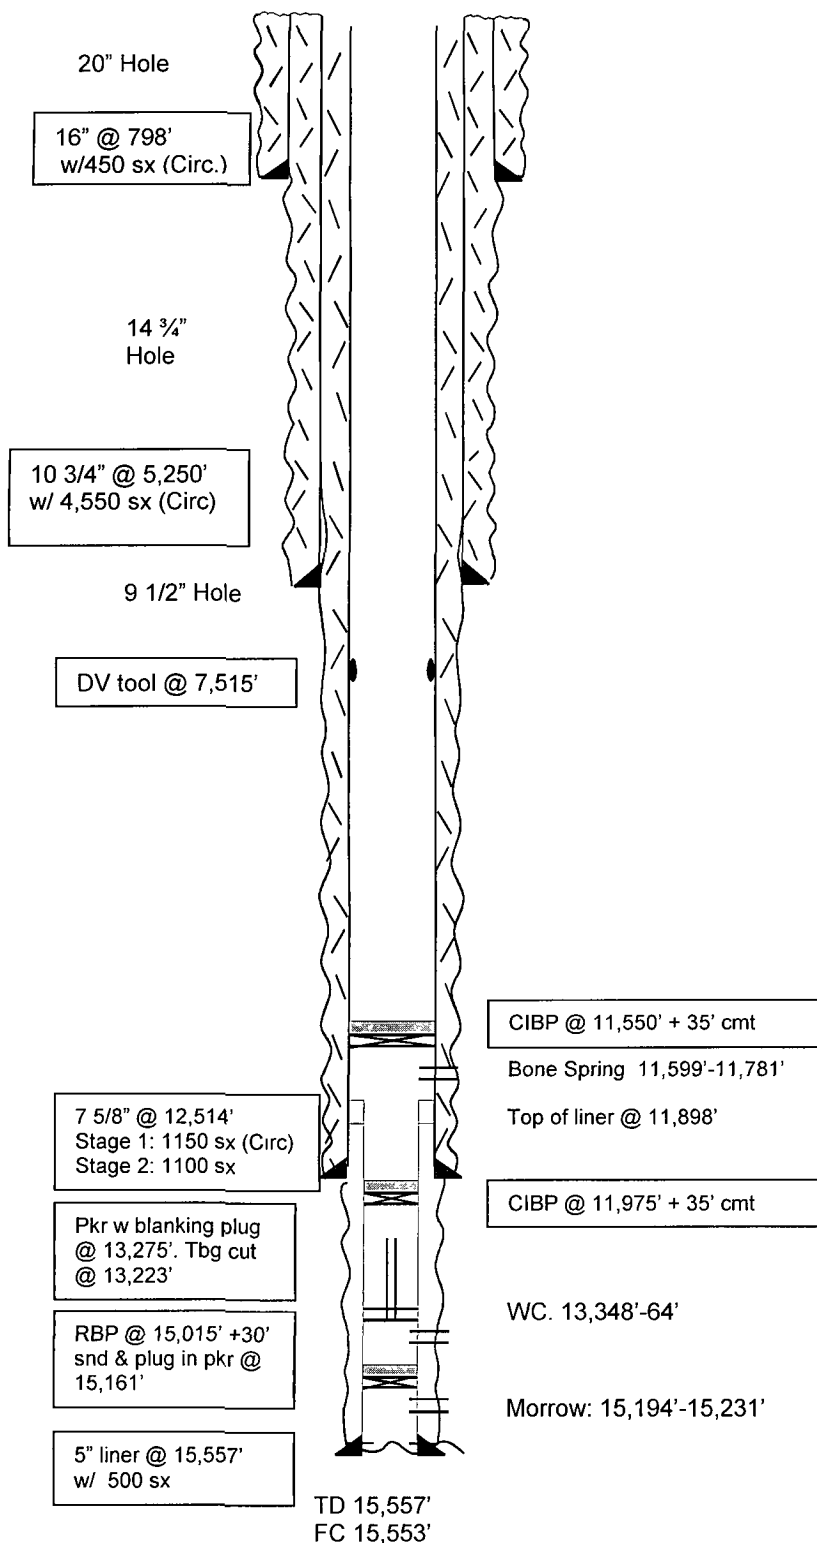

Not to Scale

10/11/12
MMFH

WELL NAME: Trucker BRK St #1H **FIELD:** Wildcat Bone Springs

LOCATION: 1980' FSL & 660' FWL of Section 2-24S-33E Lea County

GL: 3627' **ZERO:** **KB:** 3651'

SPUD DATE: 5/26/79 **COMPLETION DATE:** 11/28/79

COMMENTS: API: 30-025-26309

Frmly Jog St Com #1

CASING PROGRAM

16" 60# H-40	798'
10 3/4" 40.5# & 45.5# S80 ST&C & 45.5# K-55 STC	5,250'
7 5/8" 29.7# & 33.7# S-95 BT&C, LT&C, 33.7# P-110, LT&C	12,514'
5" liner, 23.2# P110 Hydrill SFJP	
4-1/2" 11.6# P110	15,216'

