

Submit 3 Copies To Appropriate District Office  
 District I  
 1625 N. French Dr., Hobbs, NM 88240  
 District II  
 1301 W. Grand Ave., Artesia, NM 88210  
 District III  
 1000 Rio Brazos Rd., Aztec, NM 87410  
 District IV  
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico  
 Energy, Minerals and Natural Resources

Form C-103  
 May 27, 2004

OIL CONSERVATION DIVISION  
 1220 South St. Francis Dr.  
 Santa Fe, NM 87505

WELL API NO. 30-025-01831
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. E-2064
7. Lease Name or Unit Agreement Name South Four Lakes Unit
8. Well Number 1
9. OGRID Number
10. Pool name or Wildcat Four Lakes Penn

**SUNDRY NOTICES AND REPORTS ON WELLS**  
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well  Gas Well  Other ~~SWP~~

2. Name of Operator  
Pride Energy Company

3. Address of Operator  
P.O. Box 701950, Tulsa, OK 74170-1950

4. Well Location  
 Unit Letter B : 660 feet from the N line and 1980 feet from the E line  
 Section 2 Township 12S Range 34E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)  
DF: 4160

Pit or Below-grade Tank Application  or Closure

Pit type \_\_\_\_\_ Depth to Groundwater \_\_\_\_\_ Distance from nearest fresh water well \_\_\_\_\_ Distance from nearest surface water \_\_\_\_\_

Pit Liner Thickness: \_\_\_\_\_ mil Below-Grade Tank: Volume \_\_\_\_\_ bbls; Construction Material \_\_\_\_\_

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data


<b>NOTICE OF INTENTION TO:</b>		<b>SUBSEQUENT REPORT OF:</b>	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input checked="" type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
OTHER: <input type="checkbox"/>		OTHER: <u>TA</u> <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

In May, 2005, the following work was performed:

1. Set CIBP above San Andres. CIBP @ 5250' w/ 10' cement on top. PBTD = 5240'
2. Ran MIT on casing above CIBP. Tested ok @ 500#. (Chart attached)
3. Well TA'D.

This Approval of Temporary Abandonment Expires 5/31/10

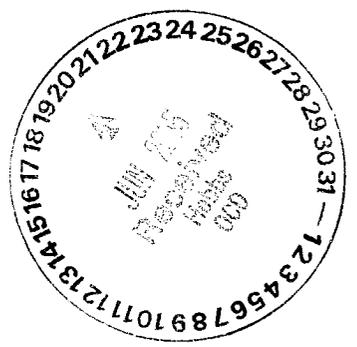

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed of closed according to NMOCD guidelines , a general permit  or an (attached) alternative OCD-approved plan .

SIGNATURE [Signature] TITLE Engineer DATE June 16, 2005

Type or print name Steve Gillett E-mail address: steveg@pride-energy.com Telephone No. 918-524-9200

APPROVED BY: [Signature] TITLE OC FIELD REPRESENTATIVE II/STAFF MANAGER DATE JUN 21 2005

Conditions of Approval (if any): \_\_\_\_\_

**Proposed Completion**

KB: 4161.0'  
DF: 4160.0'  
GL: 4149.0'  
Datum: 12.0' above GL

**South Four Lakes Ut # 1**

Steve Gillett 5/10/05  
API # 30-025-01831  
660' FNL & 1980' FEL  
Sec 2-T12S-R34E  
Lea Co, NM

13 3/4" TOC @ surface (circ)  
9 1/2" TOC @ surface (circ)  
13 3/4" 48# @ 389' w/ 325 sx in 1 7/2" hole

5 1/2" TOC stg 2 @ 2375' by TS  
9 1/2" @ 4220' w/ 3000 sx in 1 1/4" hole

San Andres perfs: 5322'-40', 48'-78',  
5384'-5408', 2 spf, 144 holes

PBTD 7935'  
CIBP @ 8000' w/ 30 sx on top  
Casing part @ 8050'

5 1/2" Primary cmt stage 2  
2 holes @ 8175' w/ 1600 sx  
5 1/2" TOC stg 1 @ 8185' by TS

Penn "A" perfs: 9888'-9900', 1 spf, 12 holes


Penn "C" perfs: 10148'-68', 1 spf, 21 holes

Cisco perfs: 10227'-57', 4 spf, 120 holes

CIBP @ 10,970'

Bend perfs: 11386'-404', 410'-412"  
1 spf, 22 holes

PBTD = 11,417'  
5 1/2" 15.5, 17, 20# @ 11,417'  
w/ 750 sx out shoe in 8 3/4" hole

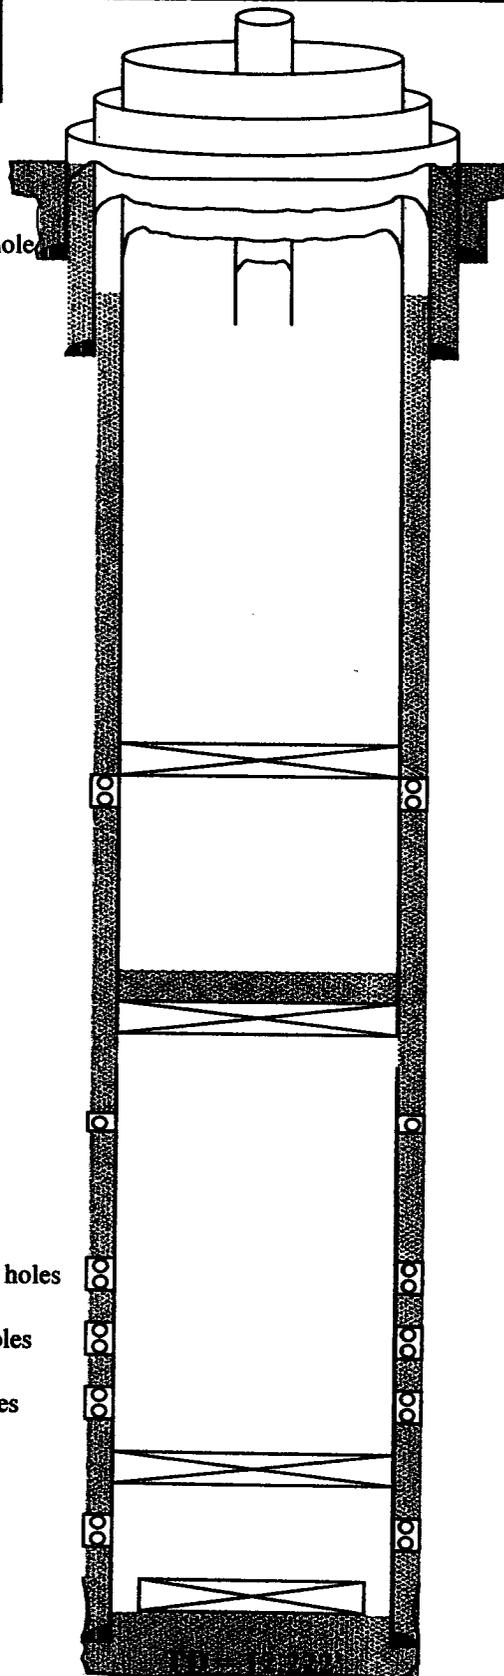

no tubing in wellbore

CIBP @ 5250' w/ 10' cmt on top

BP pushed to 11,417'

