District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Avenue, Artesia, NM 88210
District III
1000 Rio Brazos Road, Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico Energy Minerals and Natural Resources

For drilling and production facilities, submit to appropriate NMOCD District Office.


For downstream facilities, submit to Santa Fe

Form C-144 June 1, 2004

Oil Conservation Division

1220 South St. Francis Dr. office Santa Fe, NM 87505

Pit or Below-Grade Tank Registration or Closure		
Is pit or below-grade tank covered by a "general plan"? Yes \(\sum_{\text{No}} \sum_{\text{No}} \sum_{Dollar transformed by the law and brain to the		
Type of action: Registration of a pit or below-grade tank Closure of a pit or below-grade tank		
Operator: Citation Oil & Gas CorpTelepho	ne:(281) 517-7800e-mail address:	
Address: 8233 Willow Place Dr. Ste 250 Houston TX 77070-9964		
Facility or well name: _Devonian State #9API #: _30-025-36827	U/L or Qtr/Qtr _0 Sec _20_	T21S R36E
County: _LeaLatitu	ide32 27' 34" N Longitude103 17' 0	06" W NAD: 1927 🔲 1983 🔲
Surface Owner: Federal 🗌 State 🗖 Private 🗷 Indian 🗌		
Pit	Below-grade tank	
Type: Drilling 🛛 Production 🗌 Disposal 🗍	Volume:bbl Type of fluid: Construction material: Double-walled, with leak detection? Yes If not, explain why not.	
Workover ☐ Emergency ☐		
Lined 🛮 Unlined 🔲		
Liner type: Synthetic Thickness 12 mil Clay		
Pit Volume _3600bbl		
Depth to ground water (vertical distance from bottom of pit to seasonal high water elevation of ground water.)	Less than 50 feet	(20 points)
	50 feet or more, but less than 100 feet	(10 points)
	100 feet or more (Range 106' – 195')	(0 points)
	Yes	(20 points)
Wellhead protection area: (Less than 200 feet from a private domestic	No NO	(0 points)
water source, or less than 1000 feet from all other water sources.)		
Distance to surface water: (horizontal distance to all wetlands, playas, irrigation canals, ditches, and perennial and ephemeral watercourses.)	Less than 200 feet	(20 points)
	200 feet or more, but less than 1000 feet	(10 points)
	1000 feet or more MORE THAN 1000'	(0 points)
	Ranking Score (Total Points)	0 points
If this is a pit closure: (1) Attach a diagram of the facility showing the pit	's relationship to other equipment and tanks. (2) Ind.	icate disposal location: (check the onsite box if
your are burying in place) onsite \(\square\) offsite \(\square\) If offsite, name of facility_	(3) Attach a general	description of remedial action taken including
remediation start date and end date. (4) Groundwater encountered: No		
(5) Attach soil sample results and a diagram of sample locations and excavations.		
Additional Comments: See attached map and memo.		
I hereby certify that the information above is true and complete to the bes	t of my knowledge and belief. I further certify that	the shave described nit or below-grade tank
has been/will be constructed or closed according to NMOCD guidelin		
Printed Name/Title David Hobgood - Production Engineer Signature		
Your certification and NMOCD approval of this application/closure does not relieve the operator of liability should the contents of the pit or tank contaminate ground water or otherwise endanger public health or the environment. Nor does it relieve the operator of its responsibility for compliance with any other federal, state, or local laws and/or regulations.		
Approval: Printed Name/Title GARY W. WINK STAFFMGR Signature Lay W. Winkate: 8/11/05		

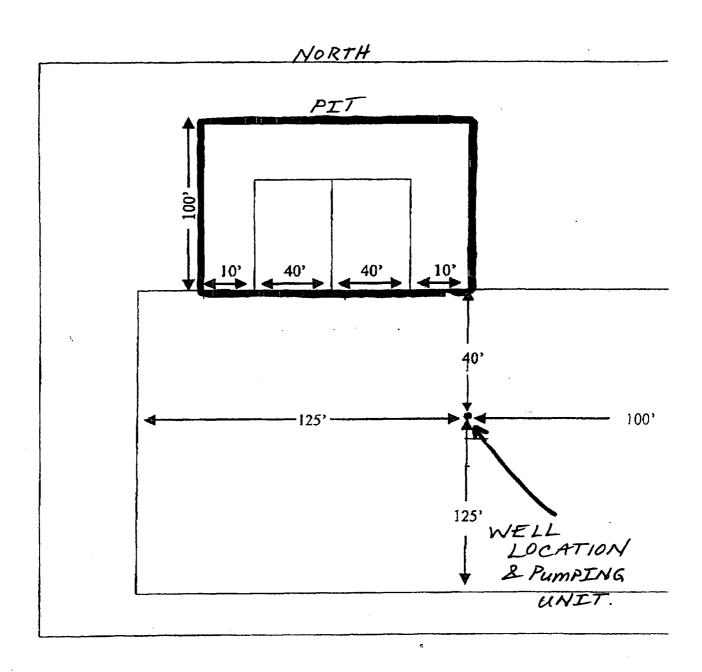

DEVONIAN STATE #9 LOCATION



August 5, 2005

TO:

New Mexico Oil Conservation District

FROM:

David Hobgood

SUBJECT:

Pit Closure / Remediation

Devonian State #9 API: 30-025-36827 710 FNL, 1980 FEL

Sec 20, T 21S R 36E (approximately 7 miles west of Eunice)

Lea County, New Mexico

Dear Sirs,

Pit remediation for the Devonian State #9 drilling pit conducted as follows:

- Pumped drilling liquids from pit and trucked away at cessation of drilling activities. Disposed of via Key Services.
- Allowed pit to dry.
- Fold lining to center of pit without tearing.
- Lay 20 mil thick plastic cap with borders 3' beyond pit.
- Fill with 3' to 4' of fill and level to grade.
- Anticipated completion date August 26, 2005.

As per discussion with Larry Johnson, Environment Engineer with the Hobbs office NMOCD (phone call August 5th, 2005), soil sample not required since location is not in a sensitive area and ground water is 106' below surface.

Sincerely yours,

David Hobgood

avid Hobgood / by: Bridget Simbe

