

Submit 3 Copies To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO.	30-015-28763
5. Indicate Type of Lease	STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name	Twedy 9
8. Well Number	1
9. OGRID Number	190974
10. Pool name or Wildcat	Dagger Draw Strawn East

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other ☐ RECEIVED

2. Name of Operator
BATTLECAT OPERATING CO. LLC

3. Address of Operator
600 N. MARIENFELD, STE. 460, MIDLAND, TX. 79708

4. Well Location
Unit Letter J : 1980 feet from the S line and 1980 feet from the E line
Section 3 Township 20-S Range 25-E NMPM EDDY County N.M.

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3,464' - GR

Pit or Below-grade Tank Application ☐ or Closure ☐

Pit type _____ Depth to Groundwater _____ Distance from nearest fresh water well _____ Distance from nearest surface water _____

Pit Liner Thickness: _____ mil Below-Grade Tank: Volume _____ bbls; Construction Material _____

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion. **Notify OCD 24 hrs before starting operations.**

- Run in Hole to 8,950' & Set a CIBP. Spot a 35' Cmt Plug. WOC & Tag.
- Pump 9.5 - 10 ppg Mud between Plugs.
- Spot a 100' Plug f/ 6815' - 6915'.
- Pump 9.5 - 10 ppg Mud between Plugs.
- Spot a 100' Plug f/ 4715' - 4815'.
- Pump 9.5 - 10 ppg Mud between Plugs.
- Spot a 100' Plug f/ 2615' - 2715'.
- Pump 9.5 - 10 ppg Mud between Plugs.
- Spot a 100' Plug f/ 1205' - 1305' (Inter. Csg Shoe Plug). WOC & Tag.
- Pump 9.5 - 10 ppg Mud between Plugs.
- Spot a 100' Plug f/ 293' - 393' (Surf. Csg Shoe Plug). WOC & Tag.
- Pump 9.5 - 10 ppg Mud between Plugs.
- Spot Cmt f/ 30' to Surf.
- Cut Off Well Head & Install a Dry Hole Marker.

If this work requires an earthen pit, a permit must be approved prior to construction of the pit(s).

Due to the unavailability of equipment, Battlecat Operating Co LLC is requesting a 90 day extension in order to plug this well. I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE Jesse K. Lawson TITLE Petroleum Engineer DATE July 29, 2005

Type or print name: Jesse K. Lawson E-mail address: jklaw-hd@cox.net Telephone No. 432-556-9809

For State Use Only

APPROVED BY: Ph. Hawkins TITLE Field Engineer DATE 8/10/05
Conditions of Approval (if any):

XACT TECHNOLOGIES, INC.

P. O. Box 50871 - Midland, TX 79710 - Ofc: 915-570-6367 - Fax: 915-682-6367

OPERATOR: BATTLECAT OPERATING CO.

SPUD DATE: 1/26/1996

WELL NAME & NO.: TWEEDY 9 #1

COMPLETION DATE: 3/22/1996

API NO.: 30-015-28763

LEGAL DESCRIPTION: 1980' FEL & 1980' FSL, UNIT J, Sec. 9, T20S, R25E, NMPM, EDDY COUNTY, NM

FIELD: CEMETARY

Conductor:

None

GL Elevation: 3,464'

KB Elevation: 3,480'

KB: 16'

Well Head Assembly:

Not Recorded

Surface Casing:

13-3/8", 48#, H-40 ST&C
@ 343' in 17 1/2" hole
Cemented to surface
w/ 390 sxs of CI "C" Prem.
Circ 32 sxs to surf.

Tubing:

84 jts of 2-3/8", 4.7#, N-80, EUE, 8rd

Intermediate

8-5/8", 32#, J-55, ST&C
@ 1,255' in 12-1/4" hole
Cement w/ 400 sxs of Lite C
Circ 115 sxs to surf.

TOC: 8,300' by CBL

Perforations:

8,994' - 9,000' - 2 JSPF (12 Holes) STRAWN

CMT Top @ 9,135' 35' Cmt

CIBP @ 9,170'

9,204' - 9,211' - ATOKA

CMT Top @ 9,390' 10' Cmt

CIBP @ 9,400'

9,450' - 9,460' - 2 JSPF (20 Holes) MORROW

9,468' - 9,478' - 2 JSPF (18 Holes) MORROW

9,496' - 9,504' - 4 JSPF (32 Holes) MORROW

Production Casing:

4 1/2", 11.6#, N-80, LT&C
@ 9,625' in 7-7/8" hole
Cmt w/ 380 sxs of 50-50
Poz + CI "C" Premium

TD: 9,625'
PBTD: 9,578'

XACT TECHNOLOGIES, INC.

P. O. Box 50871 - Midland, TX 79710 - Ofc: 915-570-6367 - Fax: 915-682-6367

OPERATOR: BATTLECAT OPERATING CO.

SPUD DATE: 1/26/1996

WELL NAME & NO.: TWEEDY 9 #1

COMPLETION DATE: 3/22/1996

API NO.: 30-015-28763

LEGAL DESCRIPTION: 1980' FEL & 1980' FSL, UNIT J, Sec. 9, T20S, R25E, NMPM, EDDY COUNTY, NM

FIELD: CEMETARY

Well Head Assembly:

GL Elevation: 3,464'

KB Elevation: 3,480'

KB: 16'

Conductor:

None

Surface Casing:

13-3/8", 48#, H-40 ST&C
@ 343' in 17 1/2" hole
Cemented to surface
w/ 390 sxs of CI "C" Prem.
Circ 32 sxs to surf.


Intermediate

8-5/8", 32#, J-55, ST&C
@ 1,255' in 12-1/4" hole
Cement w/ 400 sxs of Lite C
Circ 115 sxs to surf.

TOC: 8,300' by CBL

Production Casing:

4 1/2", 11.6#, N-80, LT&C
@ 9,625' in 7-7/8" hole
Cmt w/ 380 sxs of 50-50
Poz + CI "C" Premium

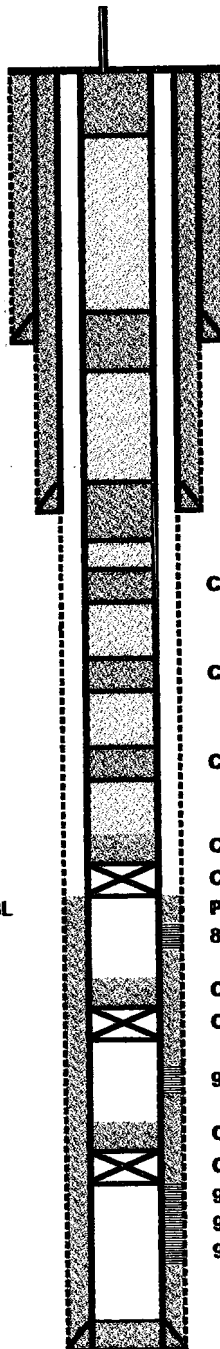

CMT PLUG @ 30' - SURFACE (30') SURF. PLUG

9.5 - 10 PPG MUD between PLUGS

CMT PLUG @ 293' - 393' (100') SURF. CSG SHOE PLUG

9.5 - 10 PPG MUD between PLUGS

CMT PLUG @ 1,205' - 1,305' (100') INTERMED. CSG SHOE PLUG

9.5 - 10 PPG MUD between PLUGS

CMT PLUG @ 2,615' - 2,715' (100')

9.5 - 10 PPG MUD between PLUGS

CMT PLUG @ 4,715' - 4,815' (100')

9.5 - 10 PPG MUD between PLUGS

CMT PLUG @ 6,815' - 6,915' (100')

9.5 - 10 PPG MUD between PLUGS

CMT TOP @ 8,915' (35')

CIBP @ 8,950'

Perforations:

8,994' - 9,000' - 2 JSPF (12 Holes) STRAWN

CMT Top @ 9,135' 35' Cmt

CIBP @ 9,170'

9,204' - 9,211' - ATOKA

CMT Top @ 9,390' 10' Cmt

CIBP @ 9,400'

9,450' - 9,460' - 2 JSPF (20 Holes) MORROW

9,468' - 9,478' - 2 JSPF (18 Holes) MORROW

9,496' - 9,504' - 4 JSPF (32 Holes) MORROW

TD: 9,625'
PBD: 9,578'