

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised March 25, 1999

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-041-20896
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name: Robinson 8
8. Well No. 1
9. Pool name or Wildcat Wildcat Devonian

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other <input checked="" type="checkbox"/> Dry Hole	
2. Name of Operator H.L. Brown Operating, L.L.C.	Ogrid #213179
3. Address of Operator 300 West Lousiana, Midland, Texas 79702	

4. Well Location Unit Letter G : 1550 feet from the North line and 1400 feet from the East line Section 8 Township 7-S Range 38-E NMPM Roosevelt County	
10. Elevation (Show whether DR, RKB, RT, GR, etc.) 4161' GL, 4180' KB	

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data	
NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input type="checkbox"/> PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPLETION <input type="checkbox"/> OTHER: <input type="checkbox"/>	SUBSEQUENT REPORT OF: REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/> COMMENCE DRILLING OPNS. <input type="checkbox"/> PLUG AND ABANDONMENT <input checked="" type="checkbox"/> CASING TEST AND CEMENT JOB <input type="checkbox"/> OTHER: <input type="checkbox"/>

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.


05/09/03 MIRU Triple N rig #23 and plugging equipment. RIH w/ sandline to 4,370', POOH. SD for weekend.


05/12/03 RIH w/ work string and 5½' CIBP, set @ 4,270'. Called OCD, Gary Wink. Circulated mud and pumped 15 sx C cmt 4,270 – 4,123'. POOH. Cut csg @ 3,676'. Pressured up on 5½" csg to 700 psi, no leak off. Cut csg @ 3,631'. Pressured up to 1,000 psi, no leak off. ND BOP and wellhead. Worked 5½" csg, not free. SDFN.

05/13/03 Worked csg, not free. Pumped 35 sx C cmt w/ 2% CaCl₂ @ 3,792'. WOC and tagged cmt @ 3,307'. Cut csg @ 2,766'. POOH w/ 2,772.63' 5½" csg. Circulated hole and pumped 35 sx C cmt @ 2,810'. WOC. SDFN.

05/14/03 Tagged cmt @ 2,674'. Pumped 30 sx C cmt 2,450 – 2,340'. Circulated hole and pumped 35 sx C cmt w/ 2% CaCl₂ @ 558'. WOC and tagged cmt @ 403'. POOH w/ wireline. Pumped 15 sx C cmt 50' to surface. RDMO.

05/20/03 Cut off wellhead and installed marker. Leveled pit and cellar, cut off anchors.

I hereby certify that the information above is true and complete, and that the well is being plugged and abandoned.	
SIGNATURE 	Approved as to plugging of the Well Bore. Liability under bond is retained until surface restoration is completed.
Type or print name James F. Newman, P.E.	DATE 05/19/03
Telephone No. 432-687-1994	

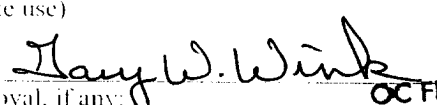APPROVED BY 	TITLE OC FIELD REPRESENTATIVE II/STAFF MANAGER	DATE JUN 05 2003
Conditions of approval, if any:		

H.L. Brown Operating, L.L.C.

Robinson 8 #1

1550' FNL & 1400' FEL, Unit G, Sec 8, T-7S, R-36E, Roosevelt Co, NM

Field: Wildcat Siluro Devonian

API # 30-041-20896

Elev: 4161', KB = 4180'

P&A: 5/20/03

Spud: 08/07/01

Completed: 09/22/01

13-3/8", 48#, H-40 @ 508'
550 sx, circulated 135 sx
17-1/2" hole


T/ Salt ~ 2380'

cut casing at 2766'

T/ Yates ~ 3045'

8-5/8", 32#, J-55 @ 3739'
1040 sx, cement circulated
11" hole

5-1/2", 15.5#, J-55 @ 5060'
600 sx, TOC @ 3724' by temp.
7-7/8" Hole

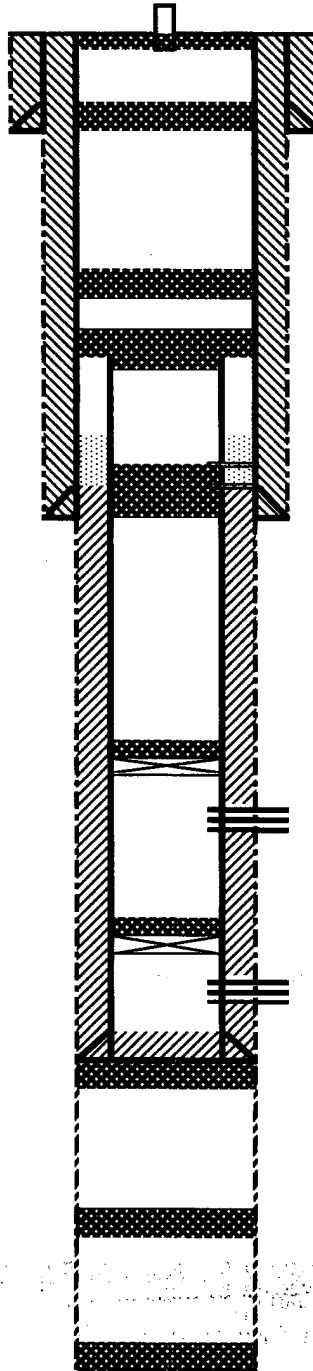

15 sx plug: 50' to surface

35 sx plug: 558' - 403', tagged

30 sx plug: 2450' - 2350'

35 sx plug: 2810' - 2674', tagged

cut casing at 3676', 3631'; not free

35 sx plug: 3792' - 3307', tagged

CIBP at 4270' w/ 15 sx "C" to 4123'

San Andres Perfs: 4367' - 4410'
@ 1 SPF, 32 holes, 4000 gals 15% NEFE

CIBP at 4780' w/ 30' cement

Glorieta Perfs: 4831' - 4899'
@ 1 SPF, 20 holes, 1500 gals 15% MCA

110 sx plug: 5120' - 5060' (tagged)

55 sx plug: 6150' - 6050'

30 sx plug: 8210' - 8110'

TD @ 8210'