

Submit 3 Copies To Appropriate District
Office

District I

1625 N. French Dr., Hobbs, NM 88240

District II

1301 W. Grand Avenue, Artesia, NM 87210

District III

1000 Rio Brazos Rd., Aztec, NM 87410

District IV

1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103

Revised March 25, 1999

WELL API NO. 30-025-24629
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No. N/A
7. Lease Name or Unit Agreement Name: STEELER
8. Well No. 1
9. Pool name or Wildcat LANGLIE MATTIX

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well:

Oil Well ☒ Gas Well ☐ Other

2. Name of Operator

JOHN H. HENDRIX CORPORATION

3. Address of Operator

403 WALL TOWERS WEST, MIDLAND, TEXAS 79701

4. Well Location

Unit Letter 0 : 990 feet from the SOUTH line and 1980 feet from the EAST line

Section 19 Township 23 Range 37 NMPM LEA County

10. Elevation (Show whether DR, RKB, RT, GR, etc.)
3332.5' GL

11. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPLETION ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ PLUG AND ABANDONMENT ☐

CASING TEST AND CEMENT JOB ☐

OTHER: ☐

12. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

WELL BORE - 8 5/8" AT 367' CIRCULATE - 5 1/2" AT 3689' TOC 1785 Calculated.

PERFORATIONS 3362' - 3625'.

1.) SET CIBP AT 3312'; CAP WITH 20 SACKS OF CEMENT. → 25 sacks

2.) CIRCULATE HOLE WITH 9.5# MUD.

3.) SPOT A 25 SACK PLUG AT 2850'; WOC.

4.) TAG TOP OF PLUG AT 2750'.

5.) PERFORATE CASING AT 1330'.


6.) SQUEEZE PERFORATIONS WITH 55 SACKS OF CEMENT; WOC.

7.) TAG TOP OF PLUG AT 1230'.

8.) PERFORATE CASING AT 417'.

9.) SQUEEZE PERFORATIONS WITH 100 SACKS OF CEMENT; WOC; TAG TOP OF PLUG AT 317'.

10.) SPOT 10 SACK SURFACE PLUG AND DRY HOLE MARKER.



I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Howard Boatright TITLE AGENT DATE 06/06/2003

Type or print name HOWARD BOATRIGHT

Telephone No. (432) 570-5382

(This space for State use)

APPROVED BY [Signature] TITLE PETROLEUM ENGINEER DATE JUN 12 2003

Conditions of approval, if any:

THE COMMISSION MUST BE NOTIFIED 24 HOURS PRIOR TO THE BEGINNING OF PLUGGING OPERATIONS FOR THE C-103 TO BE APPROVED.

John H. Hendrix Corporation
STEELER #1
Lea County, New Mexico

BEFORE PLUGGING


8 5/8
367

TOC
1785 Calc.

5 1/2
3689'

Perf.
3362 - 3625

AFTER PLUGGING

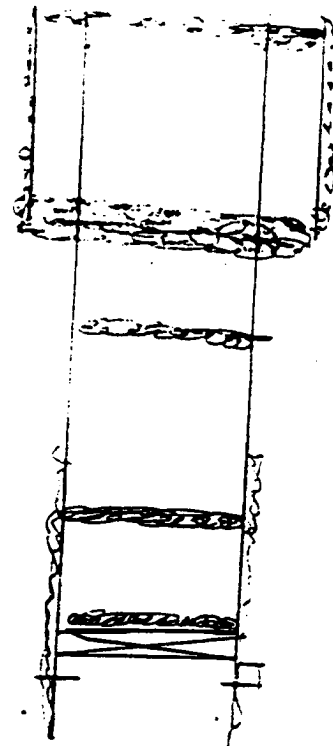

10 sx. Surf

Perf. & Sq.
100sx @ 417
Tag

Perf. & Sq.
55sx @ 133
Tag

Spot 25sx
@ 2850
Tag

CIBP @ 3312
Cap w/ 20sx

Perf.
3362 - 3625