Submit I Copy To Appropriate District Office	State of New Mexico	Form C-103
District I - (575) 393-6161	Energy, Minerals and Natural Resources	Revised August 1, 2011 WELL API NO.
1625 N. French Dr., Hobbs, NM 88240		30-025-24345
District III – (575) 748-1283 811 S. First St., Artesia, NM 8821 155 District III – (505) 334-6178	OIL CONSERVATION DIVISION	5. Indicate Type of Lease
District III - (505) 334-6178 1000 Rio Brazos Rd., Aztec, NM 87410 District IV - (505) 476-3460 1220 S. St. Francis Dr., Santa Fe NW	1220 South St. Francis Dr.	STATE FEE
District IV - (505) 476-3460	Santa Fe, NM 87505	6. State Oil & Gas Lease No.
87505	4 0	E27197
SUNDRY NOTICE	AND REPORTS ON WELLS	7. Lease Name or Unit Agreement Name
DIFFERENT RESERVOIR. USE "APPLICAT	S TO DRILL OR TO DEEPEN OR PLUG BACK TO A TION FOR PERMIT" (FORM C-101) FOR SUCH	West Pollarhide Devanian Unit
PROPOSALS.) 1. Type of Well: Oil Well Ga	s Well Other	8. Well Number UB
2. Name of Operator	o non ono	9. OGRID Number 16696
OXY USA	Inc.	
3. Address of Operator	. ,	10. Pool name or Wildcat
P.O. Box 50250 Midland, TX	79/10	Dolbuhide (Devonian)
4. Well Location		11122
		feet from the west line
Section 33	Township als Range 38E	NMPM County Lea
	1. Elevation (Show whether DR, RKB, RT, GR, etc. 3182'	.)
	3.06	
12. Check App	propriate Box to Indicate Nature of Notice	Report or Other Data
NOTICE OF INTE		SSEQUENT REPORT OF:
	PLUG AND ABANDON F REMEDIAL WOR	
	_	RILLING OPNS. P AND A
PULL OR ALTER CASING 🔲 N	MULTIPLE COMPL CASING/CEMEN	IT JOB 👚 🔲
DOWNHOLE COMMINGLE.		
OTHER:	OTHER:	П
13. Describe proposed or complete	ed operations. (Clearly state all pertinent details, a	
	SEE RULE 19.15.7.14 NMAC. For Multiple Co	ompletions: Attach wellbore diagram of
proposed completion or recom		
1 U-	8050' PBTD-7720'' Perfs-7794-8016' CIBP-7740' 13-3/8" 48# csg @ 303' w/ 335sx, 17-1/2" hole, TOC-	Sturk Civa
8-5/8" 24-32# csg @ 3947' w/ 305x, 11" hole, TOC-2598'-TS		
5-1/2" 14-15.5# csg @ 8049' w/ 260sx, 7-7/ 8" hole, TOC-*5800'-TS		
*Perf @ 5700' circ 1125sx cmt to surface		
 RIH & tag Cmt/CIBP @ 7720' M&P 25sx cmt M&P 25sx cmt @ 6200-6100' WOC-Tag 		
3. 1	M&P 25sx cmt @ 5710-5610' WOC-Tag	
4. 1	40 D 35 O 3007 3007 1117	
C (M&P 25sx cmt @ 3997-3897' WOC-Tag	
5. í 6. í	Perf 5-1/2" & 8-5/8" @ 2575' sqz 60sx cmt to 2475' WO	C-Tag
6. i 7. i	Perf 5-1/2" & 8-5/8" @ 2575' sqz 60sx cmt to 2475' WO Perf 5-1/2" & 8-5/8" @ 1200' sqz 60sx cmt to 1100' WO Perf 5-1/2" & 8-5/8" @ 353' sqz 220sx cmt to surface	C-Tag C-Tag
6. i 7. i	Perf 5-1/2" & 8-5/8" @ 2575' sqz 60sx cmt to 2475' WO Perf 5-1/2" & 8-5/8" @ 1200' sqz 60sx cmt to 1100' WO	C-Tag C-Tag
6. I	Perf 5-1/2" & 8-5/8" @ 2575' sqz 60sx cmt to 2475' WO Perf 5-1/2" & 8-5/8" @ 1200' sqz 60sx cmt to 1100' WO Perf 5-1/2" & 8-5/8" @ 353' sqz 220sx cmt to surface Circ 10# MLF between plugs	C-Tag ation Division Must be notified
6. i 7. i	Perf 5-1/2" & 8-5/8" @ 2575' sqz 60sx cmt to 2475' WO Perf 5-1/2" & 8-5/8" @ 1200' sqz 60sx cmt to 1100' WO Perf 5-1/2" & 8-5/8" @ 353' sqz 220sx cmt to surface Circ 10# MLF between plugs	C-Tag ation Division Must be notified
6. I	Perf 5-1/2" & 8-5/8" @ 2575' sqz 60sx cmt to 2475' WO Perf 5-1/2" & 8-5/8" @ 1200' sqz 60sx cmt to 1100' WO Perf 5-1/2" & 8-5/8" @ 353' sqz 220sx cmt to surface Circ 10# MLF between plugs	C-Tag
Spud Date:	Perf 5-1/2" & 8-5/8" @ 2575' sqz 60sx cmt to 2475' WO Perf 5-1/2" & 8-5/8" @ 1200' sqz 60sx cmt to 1100' WO Perf 5-1/2" & 8-5/8" @ 353' sqz 220sx cmt to surface Circ 10# MLF between plugs Rig Relea The Oil Conserv 24 hours prior to	ation Division Must be notified the beginning of plugging operations.
Spud Date:	Perf 5-1/2" & 8-5/8" @ 2575' sqz 60sx cmt to 2475' WO Perf 5-1/2" & 8-5/8" @ 1200' sqz 60sx cmt to 1100' WO Perf 5-1/2" & 8-5/8" @ 353' sqz 220sx cmt to surface Circ 10# MLF between plugs	ation Division Must be notified the beginning of plugging operations.
Spud Date: I hereby certify that the information about	Perf 5-1/2" & 8-5/8" @ 2575' sqz 60sx cmt to 2475' WO Perf 5-1/2" & 8-5/8" @ 1200' sqz 60sx cmt to 1100' WO Perf 5-1/2" & 8-5/8" @ 353' sqz 220sx cmt to surface Circ 10# MLF between plugs Rig Relea The Oil Conserv 24 hours prior to	ation Division Must be notified the beginning of plugging operations.
Spud Date:	Perf 5-1/2" & 8-5/8" @ 2575' sqz 60sx cmt to 2475' WO Perf 5-1/2" & 8-5/8" @ 1200' sqz 60sx cmt to 1100' WO Perf 5-1/2" & 8-5/8" @ 353' sqz 220sx cmt to surface Circ 10# MLF between plugs Rig Relea The Oil Conserv 24 hours prior to	ation Division Must be notified the beginning of plugging operations.
Spud Date: I hereby certify that the information about SIGNATURE	Perf 5-1/2" & 8-5/8" @ 2575' sqz 60sx cmt to 2475' WO Perf 5-1/2" & 8-5/8" @ 1200' sqz 60sx cmt to 1100' WO Perf 5-1/2" & 8-5/8" @ 353' sqz 220sx cmt to surface Circ 10# MLF between plugs Rig Relea The Oil Conserv 24 hours prior to ve is true and complete to the best of my knowled TITLE Regulatory Advisor	ation Division Must be notified the beginning of plugging operations. ge and belief. DATE 12(4(2)
Spud Date: I hereby certify that the information about SIGNATURE Type or print name	Perf 5-1/2" & 8-5/8" @ 2575' sqz 60sx cmt to 2475' WO Perf 5-1/2" & 8-5/8" @ 1200' sqz 60sx cmt to 1100' WO Perf 5-1/2" & 8-5/8" @ 353' sqz 220sx cmt to surface Circ 10# MLF between plugs Rig Relea The Oil Conserv 24 hours prior to ve is true and complete to the best of my knowled	ation Division Must be notified the beginning of plugging operations. ge and belief. DATE 12(4(12)
Spud Date: I hereby certify that the information about SIGNATURE	Perf 5-1/2" & 8-5/8" @ 2575' sqz 60sx cmt to 2475' WO Perf 5-1/2" & 8-5/8" @ 1200' sqz 60sx cmt to 1100' WO Perf 5-1/2" & 8-5/8" @ 353' sqz 220sx cmt to surface Circ 10# MLF between plugs Rig Relea The Oil Conserv 24 hours prior to ve is true and complete to the best of my knowled TITLE Regulatory Advisor	ation Division Must be notified the beginning of plugging operations. ge and belief. DATE 12(12) oxy.com PHONE: 432-685-5717
Spud Date: I hereby certify that the information about SIGNATURE Type or print name	Perf 5-1/2" & 8-5/8" @ 2575' sqz 60sx cmt to 2475' WO Perf 5-1/2" & 8-5/8" @ 1200' sqz 60sx cmt to 1100' WO Perf 5-1/2" & 8-5/8" @ 353' sqz 220sx cmt to surface Circ 10# MLF between plugs Rig Relea The Oil Conserv 24 hours prior to ve is true and complete to the best of my knowled TITLE Regulatory Advisor	ation Division Must be notified the beginning of plugging operations. ge and belief. DATE 12(4(2)

OXY USA Inc. - Proposed West Dollarhide Devonian Unit #118 API No. 30-025-24345

220sx @ 353'-Surface

Perf @ 353'

17-1/2" hole @ 309' 13-3/8" csg @ 303' w/ 335sx-TOC-Surf-Circ

60sx @ 1200-1100' WOC-Tag

Perf @ 1200'

60sx @ 2575-2475' WOC-Tag

Perf @ 2575'

25sx @ 3997-3897' WOC-Tag

11" hole @ 3950' 8-5/8" csg @ 3947' w/ 300sx-TOC-2598'-TS

25sx @ 5710-5600' WOC-Tag

TD-8050'

25sx @ 6200-6100' WOC-Tag


7-7/8" hole @ 8050' 5-1/2" csg @ 8049' w/ 260sx-TOC-*5800'-TS

*11/76-Perf @ 5700' sqz 1125sx cmt, circ surf

25sx @ 7720' 11/19/12-CIBP @ 7744' w/ 3sx

Perfs @ 7794-8016'

OXY USA Inc. - Current West Dollarhide Devonian Unit #118 API No. 30-025-24345

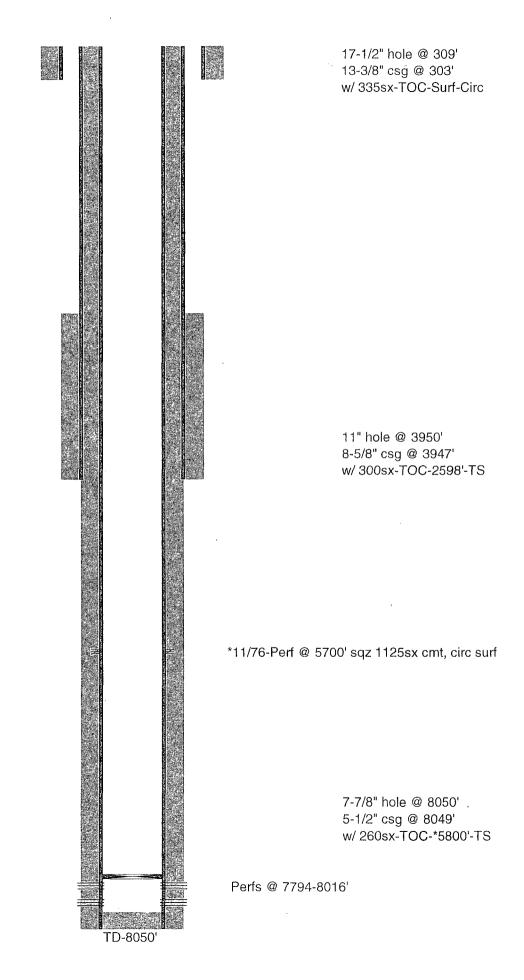

11/19/12-CIBP @ 7744' w/ 3sx