

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87401
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

HOBBS OGD

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

DEC 14 2012

RECEIVED

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-31284
1. Type of Well: Oil Well ☐ Gas Well ☒ Other Water Injection ☐		5. Indicate Type of Lease STATE ☒ FEE ☒
2. Name of Operator Chevron Midcontinent, L.P.		6. State Oil & Gas Lease No.
3. Address of Operator 15 Smith Road Midland, TX 79705		7. Lease Name or Unit Agreement Name Lovington Paddock Unit
4. Well Location Unit Letter <u>D</u> : <u>75'</u> feet from the <u>North</u> line and <u>240'</u> feet from the <u>West</u> line Section <u>31</u> Township <u>16-S</u> Range <u>37-E</u> NMPM County <u>Lea</u>		8. Well Number: 104
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3831' GL		9. OGRID Number: 24133
		10. Pool name or Wildcat Lovington Paddock

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐ OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD - 6460' Perfs 6069'-6081', 6111'-6373', CIBP @ 6010'
8-5/8" 24# csg @ 1975' w/750 sks, 12-1/4" hole, TOC, Surface, CIRC
5-1/2" 15.5# csg @ 6460' w/1600 sks, 7-7/8" hole, TOC, Surface, CIRC

1. MIRUWSU. NDWH. NUBOP. SPUT
2. Tag CIBP @ 6010'. 3725 sks of C cement, CTOC
3. Circulate well with 9.5 PPG plugging mud. Pressure Test casing to 500 psi and record/report findings.
4. Set Plug w/ 25 sks of C cement @ 3100' - 2900' CTOC, WOC, & TAG, (bottom of salt)
5. Set Plug w/35 sks of C cement @ 2100' - 1875' CTOC. WOC & TAG, (top of salt & shoe)
6. Perf & Circulate w/120 sks of C cement @ 400' to Surface.
7. Cut off wellhead and anchors 3' below grade. Weld on dry hole marker. Clean location.

Spud Date:

Rig Release Date

The Oil Conservation Division Must be notified
24 hours prior to the beginning of plugging operations.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Representative DATE 12/11/2012

Type or print name Robert Holden E-mail address: rholden@keyenergy.com PHONE: 432-523-5155

For State Use Only

APPROVED BY: [Signature] TITLE Compliance Officer DATE 12-14-2012

Conditions of Approval (if any):

DEC 17 2012

WELLBORE DIAGRAM
Lovington Paddock Unit # 104

Created: 10/23/12 By: Chay
 Updated: By:
 Lease: Lovington Paddock Unit
 Field: Lovington Paddock
 Surf. Loc.: 75' FNL & 240' FWL
 Bot. Loc.:
 County: Lea St.: NM
 Status: TA'd Oil well

Well #: 104 St. Lse: Fee
 API: 30-025-31284
 Unit Ltr.: D Section: 31
 TSHR/Rng: T16S / R37E
 Pool Code: OGRID:
 Directions: Lovington, NM
 Chevno: OQ3265

Current


Surface Casing

Size: 8 5/8", J-55
 Wt., Grd.: 24#
 Depth: 1975'
 Sxs Cmt: 750 sxs
 Circulate: yes
 TOC: surface
 Hole Size: 12-1/4"

Formation Tops	
T/Salt	2050'
B/Salt	3,000'
T/Yates	3100'
T/Queen	3750'
T/San Andres	4650'
T/Paddock	5999'

Production Casing

Size: 5 1/2", J-55
 Wt., Grd.: 15.5#
 Depth: 6460'
 Sxs Cmt: 1600 sxs
 Circulate: yes
 TOC: surface
 Hole Size: 7 7/8"

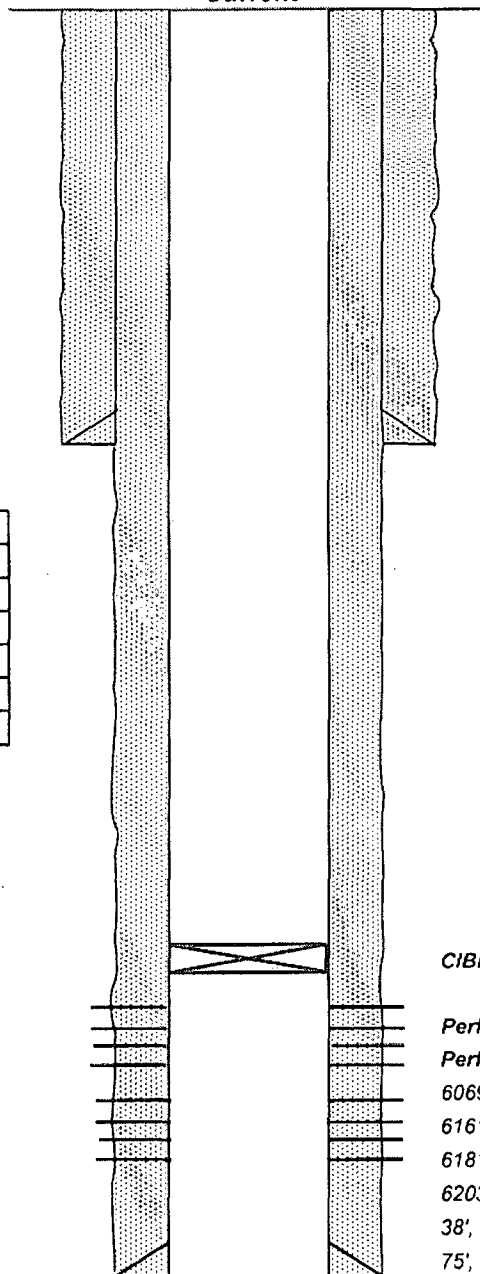

TD: 6460'

KB: 3844'
 DF:
 GL: 3831'
 Ini. Spud: 09/24/91
 Ini. Comp.: 11/03/91

History:

Initial Completion: Perfs: 6069' - 6373'
 11,500 gals 28% NEFE HCL &
 10.5 tons CO2.
 5/25/92: Fish Rods, Exchange, RTP
 8/12/92: Fish Rods, Exchange, RTP
 5/4/93: Exchange pmp, RTP
 5/25/92: Exchange pmp, RTP
 5/8/08: POH w/tbg, Set CIBP @ 6010',
 50' +/- Perfs. MIT tst 500psi f/30 mins.
 Well TA'd

CIBP @ 6010'

Perfs: 6069' - 6081', Glorieta
Perfs: 6111' - 6373' Paddock
 6069', 81', 6111', 24', 43', 49',
 6161', 64', 66', 68', 73', 75', 77', 79',
 6181', 83', 85', 87', 89', 91', 99',
 6203', 05', 07', 18', 25', 27', 29', 35',
 38', 41', 43', 45', 47', 57', 63', 67', 72',
 75', 77', 83', 632', 73'

Proposed

WELLBORE DIAGRAM

Lovington Paddock Unit # 104

Created: 10/23/12 By: Chay
 Updated: By:
 Lease: Lovington Paddock Unit
 Field: Lovington Paddock
 Surf. Loc.: 75' FNL & 240' FWL
 Bot. Loc.:
 County: Lea St.: NM
 Status: TA'd Oil well

Well #: 104 St. Lse: Fee
 API: 30-025-31284
 Unit Ltr.: D Section: 31
 TSHP/Rng: T16S / R37E
 Pool Code: OGRID:
 Directions: Lovington, NM
 Chevno: OQ3265

Per cwl 20 s s a
 e 400' to Surface

Surface Casing

Size: 8 5/8", J-55
 Wt., Grd.: 24#
 Depth: 1975'
 Sxs Cmt: 750 sxs
 Circulate: yes
 TOC: surface
 Hole Size: 12-1/4"

KB: 3844'
 DF:
 GL: 3831'
 Ini. Spud: 09/24/91
 Ini. Comp.: 11/03/91

History:

Initial Completion: Perfs: 6069' - 6373'
 11,500 gals 28% NEFE HCL &
 10.5 tons CO2.
 5/25/92: Fish Rods, Exchange, RTP
 8/12/92: Fish Rods, Exchange, RTP
 5/4/93: Exchange pmp, RTP
 5/25/92: Exchange pmp, RTP
 5/8/08: POH w/tbg, Set CIBP @ 6010'.
 50'+/- Perfs. MIT tst 500psi f/30 mins.
 Well TA'd

Set 1u w/3 sxs & Cement
 @ 2100' - 185 CToc WOC & TA
 e at Salt 4 oe

Formation Tops	
T/Salt	2050'
B/Salt	3,000'
T/Yates	3100'
T/Queen	3750'
T/San Andres	4650'
T/Paddock	5999'

in w 2 oc c
 @ 3 nd - 2900' CToc WOC & TA
 e at Salt 4

C B @ 1u/25 sxs of Cement
 CIBP @ 6010'

Production Casing

Size: 5 1/2", J-55
 Wt., Grd.: 15.5#
 Depth: 6460'
 Sxs Cmt: 1600 sxs
 Circulate: yes
 TOC: surface
 Hole Size: 7 7/8"

Perfs: 6069' - 6081', Glorieta
 Perfs: 6111' - 6373' Paddock
 6069', 81', 6111', 24', 43', 49',
 6161', 64', 66', 68', 73', 75', 77', 79',
 6181', 83', 85', 87', 89', 91', 99',
 6203', 05', 07', 18', 25', 27', 29', 35',
 38', 41', 43', 45', 47', 57', 63', 67', 72',
 75', 77', 83', 632', 73'

TD: 6460'