

District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

HOBBBS OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505
DEC 13 2012

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.) RECEIVED		WELL API NO. 30-025-37765 ✓
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator Yates Petroleum Corporation		6. State Oil & Gas Lease No. VA-2157
3. Address of Operator 105 South Fourth Street, Artesia, NM 88210		7. Lease Name or Unit Agreement Name Fender BPQ State
4. Well Location Unit Letter <u>L</u> : <u>1980</u> feet from the <u>South</u> line and <u>660</u> feet from the <u>West</u> line Section <u>17</u> Township <u>10S</u> Range <u>32E</u> NMPM <u>Lea</u> County		8. Well Number 2 ✓
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4368' GR		9. OGRID Number 025575 ✓
10. Pool name or Wildcat Wildcat; Cisco-Canyon		

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
 TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
 PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
 DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
 COMMENCE DRILLING OPNS. ☐ P AND A ☐
 CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Yates Petroleum Corporation plans to plug and abandon this well as follows:

1. MIRU. TOH with rods and pump. Load hole. NU BOP. TOH with tubing.
2. Set a CIBP at 8900' (or deeper). **WOC & TAG**
3. RIH to PBTD. Spot a 35' cement cap on CIBP. Circulate hole with 9.5 ppg mud. Spot a 25 sx cement plug from 8262'-8162'. Spot a 25 sx cement plug from 6360'-6260'. Spot a 25 sx cement plug from 3748'-3648'. WOC and tag. Spot a 25 sx cement plug from 1900'-1800'. Spot a 25 sx cement plug from 480'-380'. WOC and tag. Spot a 10 sx cement plug at surface. **to**
4. Cut off wellhead. Install marker.
5. Clean and restore location.

Wellbore schematics attached

Oil Conservation Division - Hobbs office: **Must be Notified 24 hours prior** to the beginning of Plugging Operations begin.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tina Huerta TITLE Regulatory Compliance Supervisor DATE December 11, 2012

Type or print name Tina Huerta E-mail address: tinah@yatespetroleum.com PHONE: 575-748-4168


For State Use Only

APPROVED BY: Mark Whitaker TITLE Compliance Officer DATE 12-18-2012

Conditions of Approval (if any):

Well Name: Fender BPQ State #2		Field:	
Location: 1980' FSL & 660' FWL Sec. 17-10S-32E Lea Co, NM			
GL: 4368'	Zero:	AGL:	KB: 4391'
Spud Date:		Completion Date:	
Comments:			

Casing Program	
Size/Wt/Grade/Conn	Depth
13 3/8" 48# H40	430'
9 5/8" 36 & 40# J55	3698'
5 1/2" 17# J55, L89, P110	11453'

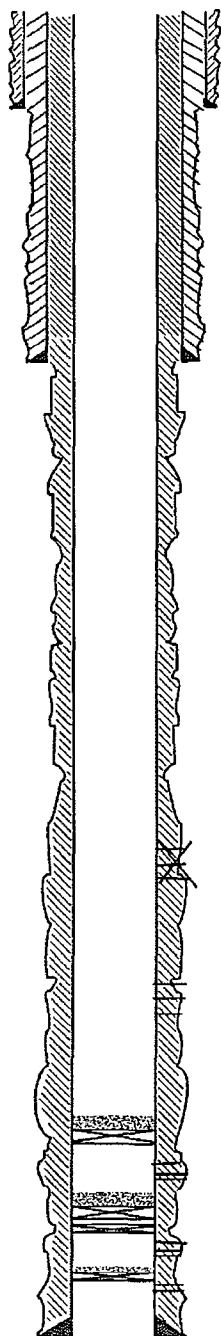

13 3/8" csg @ 430'. Cmtd w/ 420 sx cmt circ.

9 5/8" csg @ 3698'. Cmtd w/ 1550 sx. Cmt circ.

Abo perms 8262-72', 8295-8302', 8307-29' - SQUEEZED

Bough perms 8957-67', 9035-47', 9083-88'

Strawn perms 10438-51', 10454-57', 10459-68'

Atoka perms 10623-26', 10666-70', 10709-11', 10723-26', 10794-96', 11092-96'

5 1/2" csg @ 11453'. Cmtd w/ 2490 sx. Cmt circ.

CIBP@10400'
+35' cmt

CIBP@10590'
+35' cmt
Composite plug
@ 10600'

CIBP@11070'+
35' cmt

TD 11450'


PBTD 10355'

CURRENT CONFIGURATION

June 22, 2012 Fender #2

Well Name: Fender BPQ State #2		Field:	
Location: 1980' FSL & 660' FWL Sec. 17-10S-32E Lea Co, NM			
GL: 4368'	Zero:	AGL:	KB: 4391'
Spud Date:		Completion Date:	
Comments:			

Casing Program	
Size/Wt/Grade/Conn	Depth
13 3/8" 48# H40	430'
9 5/8" 36 & 40# J55	3698'
5 1/2" 17# J55, L89, P110	11453'

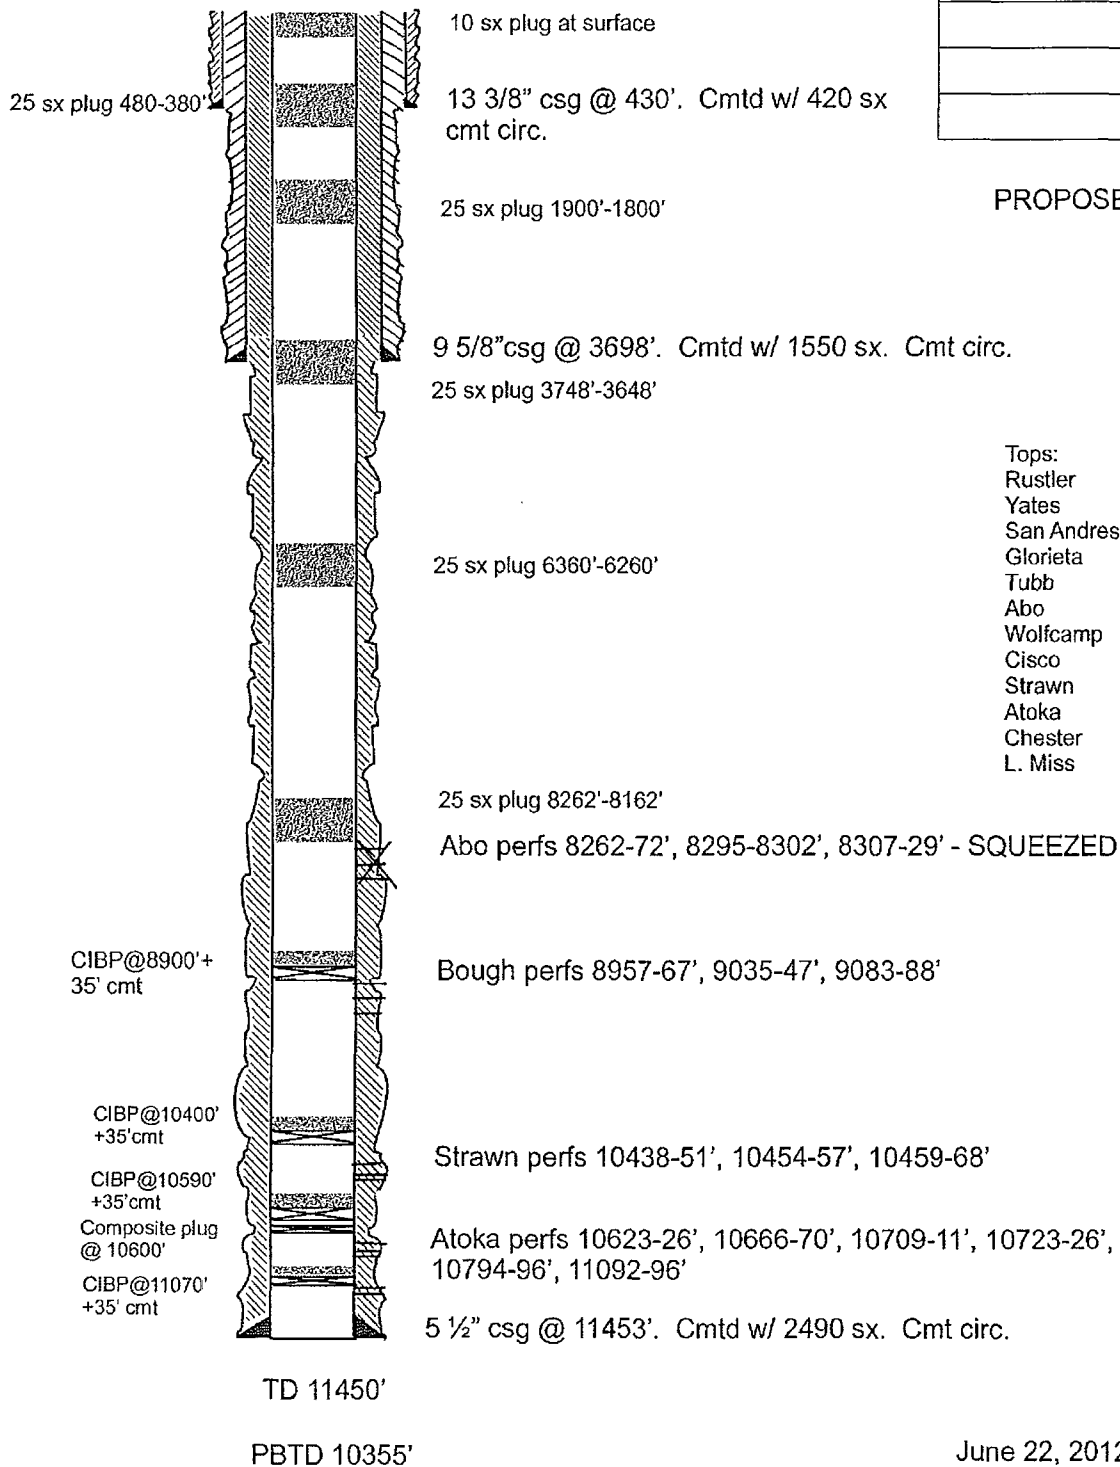

PROPOSED CONFIGURATION

Tops:	
Rustler	1578'
Yates	2236'
San Andres	3577'
Glorieta	4874'
Tubb	6363'
Abo	7216'
Wolfcamp	8330'
Cisco	8998'
Strawn	9820'
Atoka	10557'
Chester	11230'
L. Miss	11304'

June 22, 2012 Fender #2a