

Submit 1 Copy To Appropriate District
Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

HOEES OCD

OIL CONSERVATION DIVISION
MAY 01 2013
220 South St. Francis Dr.
Santa Fe, NM 87505

RECEIVED

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-07024
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
2. Name of Operator OXY USA WTP Limited Partnership		6. State Oil & Gas Lease No.
3. Address of Operator P.O. Box 50250 Midland, TX 79710		7. Lease Name or Unit Agreement Name Owen
4. Well Location Unit Letter J : 1980 feet from the South line and 1980 feet from the East line Section 35 Township 21S Range 37E NMPM County Lea		8. Well Number 3
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3375'		9. OGRID Number 192463
		10. Pool name or Wildcat Dlinebury Oil & Gas

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-7495' PBD-6035' Perfs-5507-5886' CIBP-6035'
13-3/8" 36# csg @ 334' w/ 250sx, 17-1/2" hole, TOC-Surf-Circ
8-5/8" 32# csg @ 2804' w/ 1500sx, 12-1/4" hole, TOC-Surf-Circ
5-1/2" 14-15.5# csg @ 6425' w/ 350sx, 7-7/8" hole, TOC-3510'-CBL
4" liner @ 6293-7494' w/ 70sx
1. RIH & set CIBP @ 5457', M&P 25sx cmt to 5305'
2. M&P 25sx cmt @ 5130-4980' WOC-Tag
3. M&P 25sx cmt @ 3900-3750' WOC-Tag
4. Perf @ 2854', sqz 35sx cmt to 2754' WOC-Tag
5. Perf @ 2530', sqz 35sx cmt to 2430' WOC-Tag
6. Perf @ 1460', sqz 35sx cmt to 1360' WOC-Tag
7. Perf @ 384' sqz 130sx cmt to surface
Circ 10# MLF between plugs

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Regulatory Advisor DATE 4/29/13


Type or print name David Stewart E-mail address: david_stewart@oxy.com PHONE: 432-685-5717
For State Use Only

APPROVED BY [Signature] TITLE DBT/MGR DATE 5-7-2013
Conditions of Approval (if any):

Oil Conservation Division - Hobbs office: **Must be Notified**
24 hours prior to the beginning of Plugging Operations begin.

PM
Chm

OXY USA WTP LP - Current
Owen #3
API No. 30-025-07024

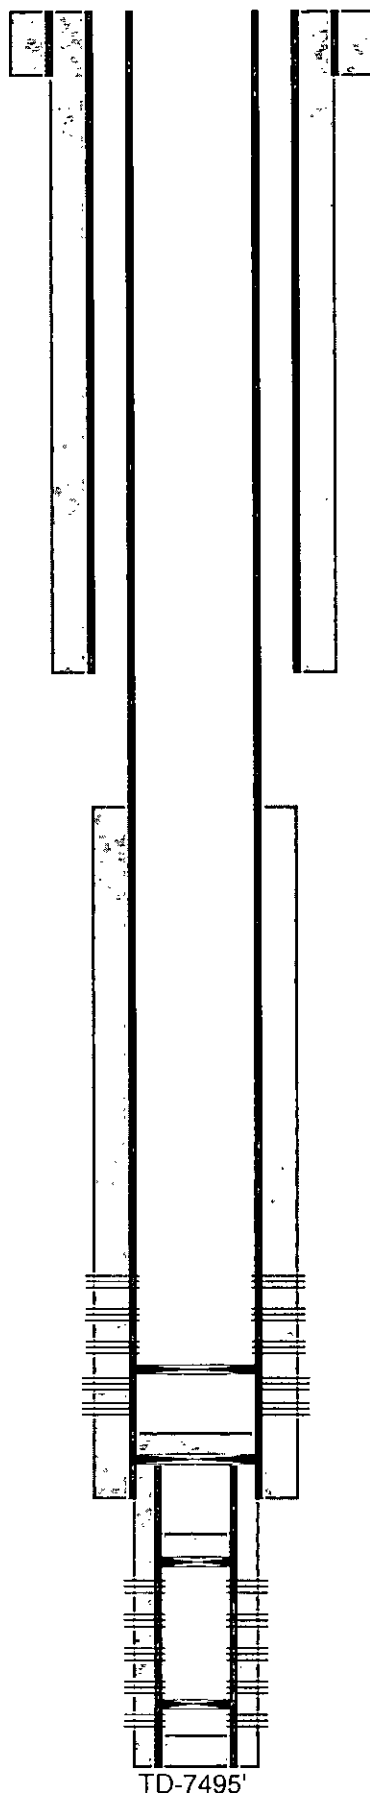

17-1/2" hole @ 334'
8-5/8" csg @ 334'
w/ 250sx-TOC-Surf-Circ

12-1/4" hole @ 2820'
8-5/8" csg @ 2804'
w/ 1500sx-TOC-Surf-Circ

9/97-Perfs @ 5507-5886'
1978-sqz perfs 5480-5690' w/ 300sx

Perfs @ 6060-6220' 1978-sqz w/ 300sx
7-7/8" hole @ 6525'
5-1/2" csg @ 6425'
w/ 350sx-TOC-3510'-CBL

Perfs @ 6661-7263'
4-3/4" hole @ 7495'
4" liner @ 6293-7494'
w/ 70sx-TOC-6293'-Circ
Perfs @ 7392-7412'

9/97-CIBP @ 6035'

9/97-CIBP @ 6275' w/ 30'cmt

9/97-CIBP @ 6630' w/ 34' cmt

1972-CIBP @ 7310'

TD-7495'

OXY USA WTP LP - Proposed
 Owen #3
 API No. 30-025-07024

130sx @ 384'-Surface

35sx @ 1460-1360' WOC-Tag

35sx @ 2530-2430' WOC-Tag

35sx @ 2854-2754' WOC-Tag

25sx @ 3900-3750' WOC-Tag

25sx @ 5130-4980' WOC-Tag


CIBP @ 5457' w/ 25sx to 5305'

9/97-CIBP @ 6035'

9/97-CIBP @ 6275' w/ 30'cmt

9/97-CIBP @ 6630' w/ 34' cmt

1972-CIBP @ 7310'

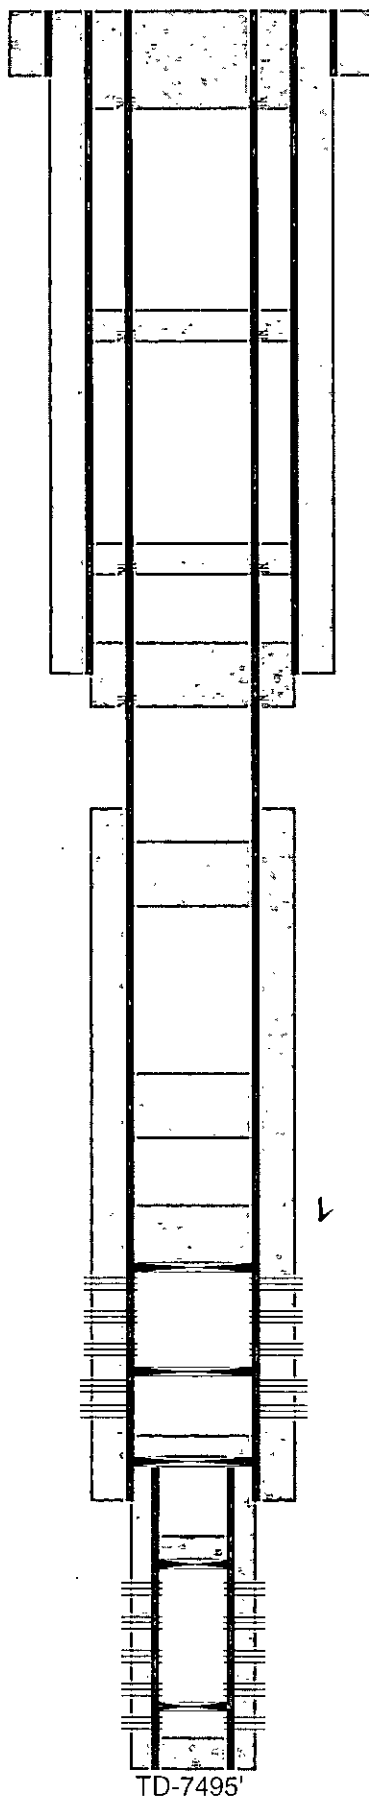

Perf @ 384'

17-1/2" hole @ 334'
 8-5/8" csg @ 334'
 w/ 250sx-TOC-Surf-Circ

Perf @ 1460'

Perf @ 2530'

12-1/4" hole @ 2820'
 8-5/8" csg @ 2804'
 w/ 1500sx-TOC-Surf-Circ

Perf @ 2854'

9/97-Perfs @ 5507-5886'
 1978-sqz perfs 5480-5690' w/ 300sx

Perfs @ 6060-6220' 1978-sqz w/ 300sx
 7-7/8" hole @ 6525'
 5-1/2" csg @ 6425'
 w/ 350sx-TOC-3510'-CBL

Perfs @ 6661-7263'
 4-3/4" hole @ 7495'
 4" liner @ 6293-7494'
 w/ 70sx-TOC-6293'-Circ

Perfs @ 7392-7412'

TD-7495'