

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised August 1, 2011

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-28577
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator Vanguard Permian LLC		6. State Oil & Gas Lease No. 305158
3. Address of Operator 5847 San Felipe St. Ste. 3000, Houston, TX 77057		7. Lease Name or Unit Agreement Name State "B"
4. Well Location Unit Letter G : 1980' feet from the North line and 1981 feet from the West line Section 36 Township 18S Range 38E NMPM County Lea		8. Well Number 1
11. Elevation (Show whether DR, RKB, RT, GR, etc.) GL 3822		9. OGRID Number
		10. Pool name or Wildcat San Andres, Foster

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Notify OCD 24 hrs prior to commencement of P & A procedure
2. MIRU P & A Equip ND WH NU BOP set CIBP @ 4400' (Sand Andres Perfs)
3. Circ hole w/mlf min 9 lbs b.w. w/25 lbs gel p/bbl
4. Spot 25x class "c" cmt on CIBP @ 4400' woc & tag pressure test csg
5. Spot 25x class "c" cmt 4050'-3850' (8 5/8" shoe, base of salt) woc & tag
6. Perf @ 1350' sqz 60x cmt 1350'-1100' (top of salt & rustler) woc & tag
7. Perf @ 458' circ cmt to surf F/458' (13 3/8 shoe)
8. Cut off well heads, Install dry hole marker, clean location

HOBBS OCD

JUN 21 2013

RECEIVED

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

Jimmy Bagley

TITLE

Agent

DATE 6/19/13

Type or print name

E-mail address: sunsetwellservice@yahoo.com

PHONE: 432-561-8600

For State Use Only

APPROVED BY

TITLE

DATE

Conditions of Approval (if any):

JUN 27 2013

305158

Well Name: State B #1Unit: GLease Type: State

HOBBS OCD

Location: 1980' FNL & 1981' FWL Sec: 36Township: 18SRange: 38ECounty: Lea State: NMAPI: 30-025-28577Formation: San Andres

JUN 21 2013

Surface CsgSize: 13 3/4"Wt.&Thrd: 61#Grade: J-55Set @: 408'Sxs cmt: 400Circ: YesTOC: SurfaceHole Size: 17 1/2"KB: 3616DF: 3599GL: 3599Spud Date: 5/29/1984Compl. Date: 1/8/1985

RECEIVED

CURRENT

History - Highlights

5/29/84: Well spud; perf 7613-7793 (Abo); 6M gal 15% NEFE; plugged; CIBP @ 6955 capped w/20' cmt. Perf 6643-6736 (Blinbry); 5M gal 15% NEFE; CIBP @4750 capped w/20' cmt. Perf 4480-4497 (San Andres); 2M gal 15% NEFE.

10/3/84: Sqz 4480-4497; drilled out CIBP @4750. Set CIBP @ 6220' w/ 20' cmt. Perf 5983.5-89' (6 holes), Acidize w/ 2000 gals 15% NEFE, treated down 2-7/8" tbg w/ 4.3 BPM @ 4600#, ISIP 2400#, 15 min 550#. Swab'd 113 BW in 4 hrs. POP. Pmp'd 250 BWPD w/ no mention of oil or gas. SIW - will submit P&A forms.

4/30/88: Set CIBP @ 5950', w/ 20' cmt. Perf 4480-4498' (19 holes). Acidize w/ 2000 gals 15% HCL & 30 balls. 3 BPM @ 4200#, ISIP 0#. Test (5/6/88) 50 Mcf, 6 BO, 65 BW on pump. Oil 29.9 grav. Test noted in file at 64 Mcf, 6 BO, 82 BW (8/14/88).

7/30/99: Perf 4570-90 (41 holes @ 2 JSPF); acidize w/ 5000 gals 15% NEFE. ATR 3 BPM, ATP 3500#, ISIP 3230#, 5 min 2150#, 15 min 1550#.

Intermediate CsgSize: 8 5/8"Wt.&Thrd: 24 & 32Grade: J-55Set @: 4000'Sxs Cmt: 1500Circ: YesTOC: Hole Size: 11"

Tbg: 2-7/8" used for acidizing.

Production CsgSize: 5 1/2"Wt.&Thrd: 15.5 & 17Grade: J-55Set @: 8000Sxs Cmt: 800Circ: TOC: 3950' (temp svy)Hole Size: 7-7/8"

TD 8000'

San Andres

4480-4497'

4570-4590'

CIBP @ 5950'

Glorietta

5983.5-89'

CIBP @ 6220'

Blinbry

6643-6736'

CIBP @ 6955'

7613-7793' (Abo)

32.7056839668703

- 103.099667234915

VANGUARD OPER #
258350
~~658350~~

API # 30-025-28577

UNIT "G" SEC. 36 T-18S R-38E
1980' FNL + 1981' FNL

HOBBS OCD


JUN 21 2013

RECEIVED

AFTER PTA

Co. Rep	VANGUARD	
Well Name	STATE B	Well No. 1
Field		
County	LEA	
State	NEW MEXICO	
Date		
Date Comp		
KB		

Description	O.D.	Grade	Weight	Depth	Cmt Sx	TOC
Surface Csg	13 3/8	J-55	61	408	400	SURF
Inter Csg	8 5/8	J-55	24 3/32	4000	1500	SURF
Prod Csg	5 1/2	J-55	15.5	8000	800	3950
Liner O.D.						

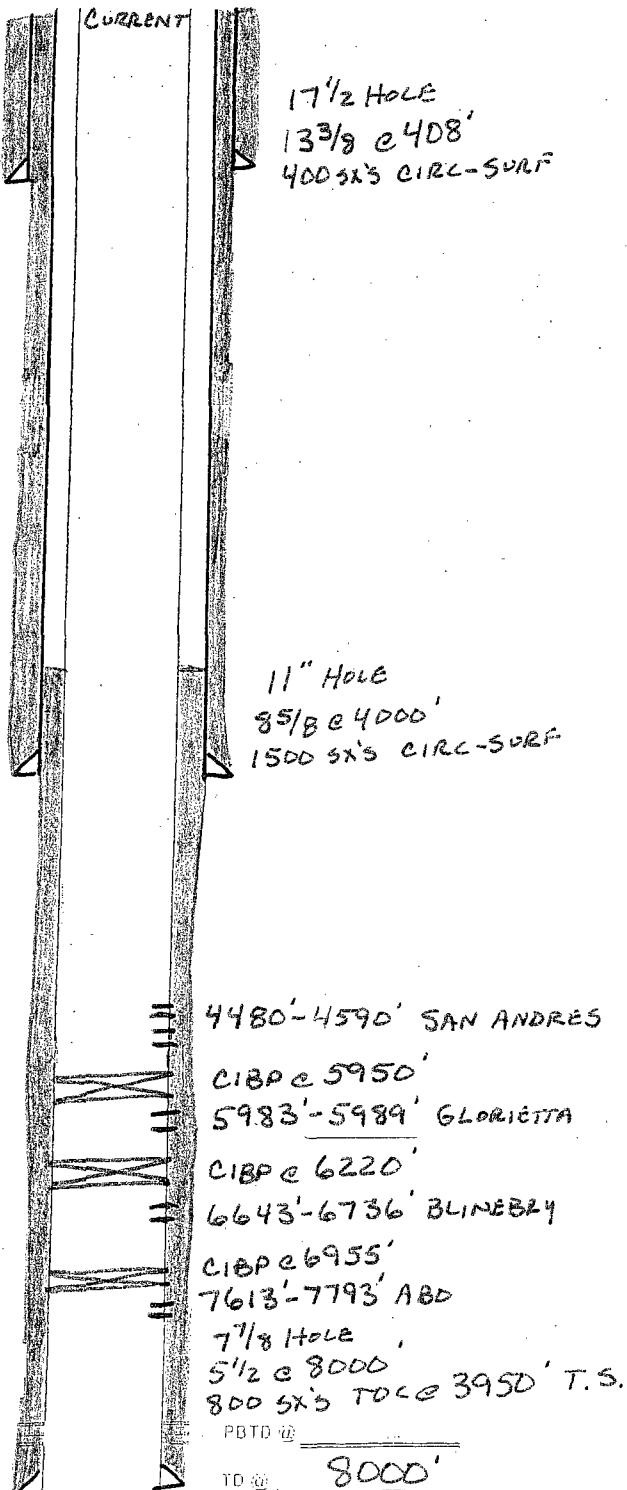

✓ PERF @ 458'
CIRC CMT TO SURF

✓ PERF @ 1350'
SDZ 60 SX'S
1350'-1100'

✓ SPOT 25 SX'S
4050'-3850'

✓ SPOT 25 SX'S
4400'-4200'
CIBP 4400'
SAN ANDRES
4480'-4590'

