

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources
OIL CONSERVATION DIVISION
220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised August 1, 2011

WELL API NO. 30-025-31674
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name ARROWHEAD GRAYBURG UNIT
8. Well Number 226
9. OGRID Number 005380
10. Pool name or Wildcat ARROWHEAD GRAYBURG

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
XTO ENERGY, INC. ATTN: STEPHANIE RABADUE

3. Address of Operator
200 N. LORAIN, SUITE 800, MIDLAND, TEXAS 79701

4. Well Location
Unit Letter: H 1650 feet from the NORTH line and 560 feet from the EAST line
Section 13 Township 22S Range 36E NMPM LEA County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3,451' - GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐ OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1) SET 5-1/2" CIBP 3,600'; CIRC. WELL W/ PXA MUD; PRES. TEST 5-1/2" CSG. TO 500#.
- 2) PUMP 25 SXS. CMT. @ 3,600'-3,460'.
- 3) PUMP 45 SXS. CMT. @ 2,733'-2,420' (T/YATES X B/SALT); WOC X TAG CMT. PLUG.
- 4) PUMP 30 SXS. CMT. @ 1,311'-1,110' (T/SALT, 8-5/8" CSG. SHOE X T/ANHY.); WOC X TAG CMT. PLUG.
- 5) MIX X CIRC. TO SURF. 15 SXS. CMT. @ 100'-3.
- 6) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; WELD STEEL PLATE ONTO CSGS. X INSTALL DRY HOLE MARKER.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David A. Eyler TITLE: AGENT

DATE: 07/10/13

Type or print name: DAVID A. EYLER

E-mail address: DEYLER@MILAGRO-RES.COM

PHONE: 432.687.3033

For State Use Only

APPROVED BY [Signature] TITLE Dist. Mgr.

DATE 7-17-2013

Conditions of Approval (if any):

OIL CONSERVATION DIVISION - Hobbs office **Must Be Notified**
24 hours prior to the beginning of Plugging Operations.

JUL 17 2013 PM

AGU 226
LEA CO, NM
SEC 13, T22S R36E
1650' FNL, 560' FEL
API # 30-025-31674




TA'D

ELEV
GL: 3451'
KB: 3464.5'

12 1/4" HOLE

8-5/8" 23#, M50, CSG @ 1210'
CMT W/900 SX
CIRC TO SURF W/275 SX

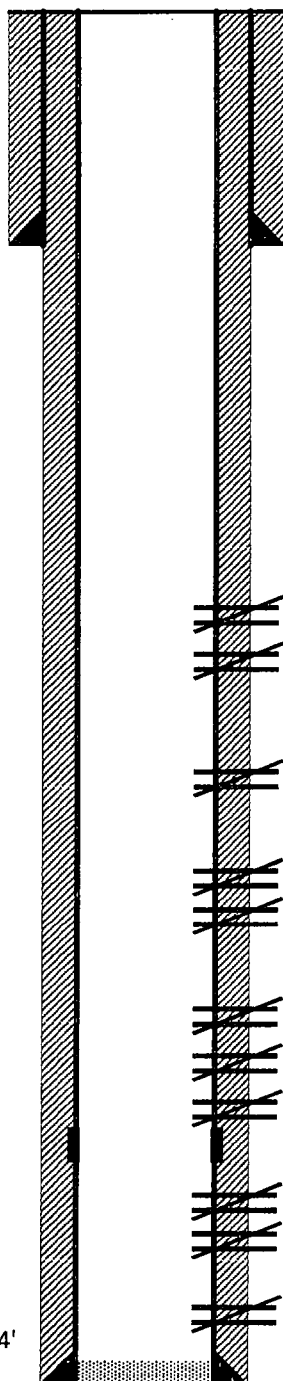

PERFS: PNRS

3622'-26' (SQZ 7/14/08)
3629'-32' (SQZ 7/14/08)
3644'-46' (SQZ 7/14/08)
3652'-56' (SQZ 7/14/08)

PERFS: GRBG

3669'-74' (SQZ 7/14/08)

3702'-18' (SQZ 7/14/08)
3732'-36' (SQZ 7/14/08)
3740'-54' (SQZ 7/14/08)
3745'-55' (SQZ 7/14/08)

3764'-72' (SQZ 7/14/08)
3765'-85' (SQZ 7/14/08)
3768'-73' (SQZ 7/14/08)
3778'-94' (SQZ 7/14/08)
3782'-88' (SQZ 7/14/08)

3801'-03' (SQZ 7/14/08)
3825'-28' (SQZ 7/14/08)
3833'-38' (SQZ 7/14/08)

3844'-56' (SQZ 7/14/08)
3864'-68' (SQZ 7/14/08)

FLOAT COLLAR @ 3792'

7 7/8" HOLE

5-1/2", 15.5#, K55 CSG @ 3874'
CMT STG 1 W/550 SX C
CMT STG 2 W/300 SX H
CIRC TO SURF W/107 SX

PBTD: 3872'
TD: 3874'

ELEV
GL: 3451'
KB: 3464.5'

8-5/8" 23#, M50, CSG @ 1210'
CMT W/900 SX
CIRC TO SURF W/275 SX

CIRC. 25 15 SXS. CMT. CO. Zoo' 100'-3'

✓ Pump 30 SXS. CMT. @ 1311' - 1110' - TAG

✓ Pump. 45 sxs. cmf. @ 2733' - 2420' - MAG

Temp 25 SWS. CMT. CD 3600' - 3460'

→ SET 5-1/2" CIDP @ 3600'

PERFS: PNRS

3622'-26' (SQZ 7/14/08)
3629'-32' (SQZ 7/14/08)
3644'-46' (SQZ 7/14/08)
3652'-56' (SQZ 7/14/08)

PERFS: GRBG

3669'-74' (SQZ 7/14/08)

3702'-18' (SQZ 7/14/08)
3732'-36' (SQZ 7/14/08)
3740'-54' (SQZ 7/14/08)
3745'-55' (SQZ 7/14/08)

3764'-72' (SQZ 7/14/08)
3765'-85' (SQZ 7/14/08)
3768'-73' (SQZ 7/14/08)
3778'-94' (SQZ 7/14/08)
3782'-88' (SQZ 7/14/08)

3801'-03' (SQZ 7/14/08)
3825'-28' (SQZ 7/14/08)
3833'-38' (SQZ 7/14/08)

3844'-56' (SQZ 7/14/08)
3864'-68' (SQZ 7/14/08)

FLOAT COLLAR @ 3792'

7 7/8" HOLE

5-1/2", 15.5#, K55 CSG @ 3874'
CMT STG 1 W/550 SX C
CMT STG 2 W/300 SX H
CIRC TO SURF W/107 SX

PBTD: 3872'
TD: 3874'

DAE 07/11/13