

Submit 1 Copy To Appropriate District Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87401
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources
OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

Form C-103
 Revised August 1, 2011

HOBBS OGD
 JUL 18 2013

RECEIVED

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other	7. Lease Name or Unit Agreement Name SNYDER
2. Name of Operator LYNX PETROLEUM CONSULTANTS, INC.	8. Well Number 001
3. Address of Operator P.O. BOX 1708, HOBBS, NM 88241	9. OGRID Number 13645
4. Well Location Unit Letter <u>J</u> : <u>1980</u> feet from the <u>SOUTH</u> line and <u>1980</u> feet from the <u>EAST</u> line Section <u>26</u> Township <u>15S</u> Range <u>35E</u> NMPM LEA County	10. Pool name or Wildcat TOWNSEND;PERMO UPPER PENN
11. Elevation (Show whether DR, RKB, RT, GR, etc.)	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

- PERFORM REMEDIAL WORK PLUG AND ABANDON
 TEMPORARILY ABANDON CHANGE PLANS
 PULL OR ALTER CASING MULTIPLE COMPL
 DOWNHOLE COMMINGLE

SUBSEQUENT REPORT OF:

- REMEDIAL WORK ALTERING CASING
 COMMENCE DRILLING OPNS. P AND A
 CASING/CEMENT JOB

OTHER:

OTHER:

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- MIRU. POOH w/rods and pump. ND wellhead and NU BOP.
- Release TAC. Tally tubing OOH.
- TIH w/2-7/8" tubing open ended to 10550'. Circulate hole w/ ^{MLF} fresh water.
- Spot ^{MLF} 25 sx. plugs per proposed program. Displace each plug with fresh water. ^{MLF}
- WOC and tag plug set at 4630'.
- ND BOP and tubing spool. Weld on 5-1/2" pull nipple.
- Run free point. Cut and recover 5-1/2" casing from above free point at +/-2700'. TOOH laying down 5-1/2" casing.
- TIH w/2-7/8" tubing open ended to 2800'. Spot 50 sx. plug in/out of 5-1/2" casing stub. WOC and tag plug. ✓
- Pull up and spot 36 sx. plug at 465'.
- Spot 20 sx. plug at surface. From 75' to SURFACE
- Cut off remaining wellhead.
- Erect 4" x 4' dry hole marker.
- RD and release plugging equipment.

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Debbie McKelvey TITLE AGENT DATE 7/17/13

Type or print name Debbie McKelvey E-mail address: debmckelvey@earthlink.net PHONE: 575-392-3575

For State Use Only

APPROVED BY: [Signature] TITLE Dist Mgr DATE 7-22-2013


Conditions of Approval (if any):

OIL CONSERVATION DIVISION - Hobbs office **Must Be Notified**
 24 hours prior to the beginning of Plugging Operations.

JUL 24 2013 PM

Proposed Plug and Abandonment
07/12/2013

Elevation: 3948'GL KB: +17'

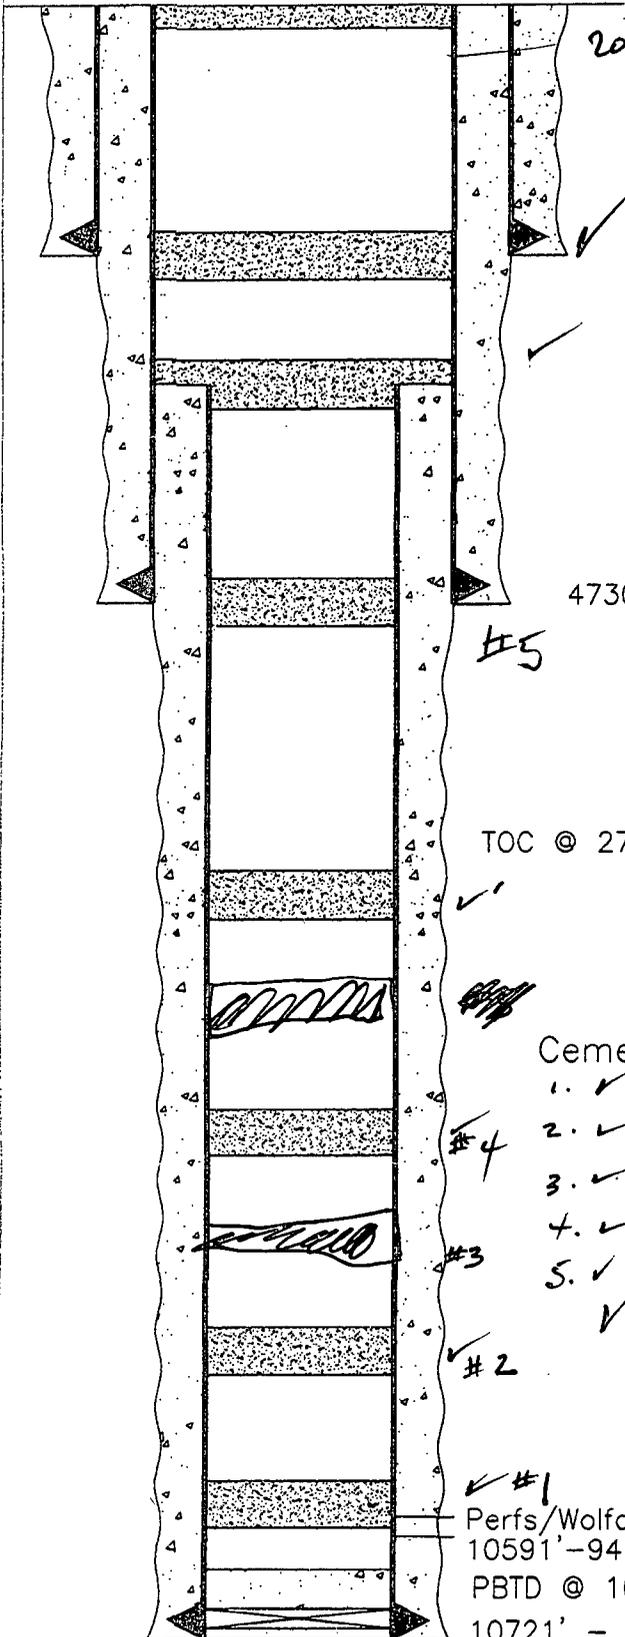

12-1/4" Hole
4730' - 8-5/8", K-55, 32#, ST&C Casing.
Cemented w/2890 sxs. Circulated to Surface

TOC @ 2700' (Estimated)

7-7/8" Hole

Cement Plugs;

1. ✓ 25 sx. @ 10350'-10550' - WOC-TA9
2. ✓ 25 sx. @ 9526'-9726'
3. ✓ 25 sx. @ 8133'-8333'
4. ✓ 25 sx. @ 6213'-6513'
5. ✓ 35 sx. @ 4630'-4830' - PERF 50 - WOC-TA9
- ✓ 50 sx. @ 2600'-2800'
- 35 sx. @ 350'-465'
- 20 sx. @ Surface From 75' to Surface

Perfs/Wolfcamp 10396'-402', 10429'-33', 10504'-06',
10591'-94', 10610'-20', 10624'-38'

PBTD @ 10686'

10721' - 5 1/2", 17#, P-110
Cement w/1125 sxs. Class 'C' &
Class 'H' + additives

T.D. @ 10740'

Lynx Petroleum Cons.
Snyder No. 1
1980' FSL & 1980' FEL
Sec. 26, T-15S, R-35E
Lea County, N.M.