

District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

RECEIVED
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505
JUL 31 2013
HOBBS

WELL API NO. 30-025-31027
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Lovington San Andres Unit
8. Well Number: 64
9. OGRID Number: 241333
10. Pool name or Wildcat Lovington Grayburg San Andres

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other Water Injection

2. Name of Operator
Chevron Midcontinent, L.P.

3. Address of Operator
15 Smith Road Midland, TX 79705

4. Well Location

Unit Letter C : 80 feet from the NORTH line and 1330 feet from the WEST line
Section I Township 17-S Range 36-E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3827' DL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-4581' Perfs 4642' - 5029' CIBP @ 4581'
8-5/8" 24# csg @ 425' w/275 sks, 12-1/4" hole, TOC: Surface
5-1/2" 15.5# csg @ 5109' w/1525 sks, 7-7/8" hole, TOC: Surface

- MIRUWSU. NDWH. NUBOP
- Tag CIBP @ 4581' w/25 sks of C cement.
- Circulate well with 9.5 PPG plugging mud. Pressure Test casing to 500 psi and record/report findings.
- Spot plug w/30 sks of C cement @ 3102' - 2902', CTC. WOC & TAG (Bottom of Salt)
- Spot plug w/ 30 sks of C cement @ 2100' - 1900', CTC. WOC & TAG (Top of Salt)
- Spot plug w/ 60 sks of Class C cement 525' - ~~3102'~~ (Shoe) *→ Circ Cmt to Surface*
- ~~Perf & Circulate 40 sks of C cement @ 100' to Surface.~~
- Cut off wellhead and anchors 3' below grade. Weld on dry hole marker. Clean location.

- Closed-Loop System Used -

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Representative DATE 07/31/2013

Type or print name Robert Holden E-mail address: rholden@keyenergy.com PHONE: 432-523-5155

For State Use Only

APPROVED BY [Signature] TITLE Dist. MGR. DATE 7/31/2013

Conditions of Approval (if any):

JUL 31 2013

CURRENT

WELLBORE DIAGRAM
LSAU 64

Created: 02/01/12 By: PTB
Updated: By:
Lease: Lovington San Andres Unit
Field: Lovington Grayburg San Andres
Surf. Loc.: 80' FNL 1330' FWL
Bot. Loc.:
County: Lea St.: NM
Status: SI Producing Well

Well #: 64 St. Lse:
API 30-025-31027
Unit Ltr.: C Section: 1
TSHR/Rng: 17S 36E
Pool Code: OGRID:
Directions: Lovington, NM
Chevno: OM2003

Surface Casing


Size: 8 5/8"
Wt., Grd.: 24#
Depth: 425'
Sxs Cmt: 275
Circulate: yes
TOC: surface
Hole Size: 12-1/4"

KB:
DF:
GL: 3,827
Ini. Spud: 02/12/91
Ini. Comp.: 04/12/91

Top Salt 2000'
Bottom Salt 3002'

Production Casing

Size: 5 1/2"
Wt., Grd.: 15.5#
Depth: 5109'
Sxs Cmt: 1525
Circulate: Yes
TOC: Surface
Hole Size: 7 7/8"

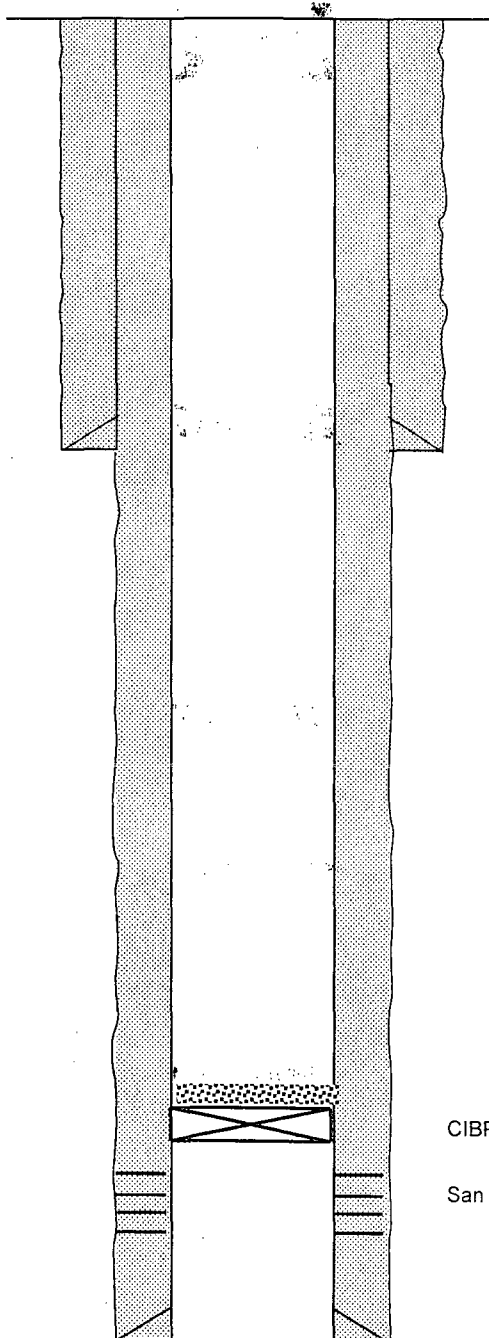

CIBP @ 4581' capped with 50' cmt

San Andres Perfs: 4642'-5029'

Proposed
WELLBORE DIAGRAM
LSAU 64


Created: 02/01/12 By: PTB
Updated: By:
Lease: Lovington San Andres Unit
Field: Lovington Grayburg San Andres
Surf. Loc.: 80' FNL 1330' FWL
Bot. Loc.:
County: Lea St.: NM
Status: SI Producing Well

Well #: 64 St. Lse:
API 30-025-31027
Unit Ltr.: C Section: 1
TSHR/Rng: 17S 36E
Pool Code: OGRID:
Directions: Lovington, NM
Chevno: OM2003

*Prof & Circulate w/ 140 sks of cmt
to TO SURFACE*

Surface Casing
Size: 8 5/8"
Wt., Grd.: 24#
Depth: 425'
Sxs Cmt: 275
Circulate: yes
TOC: surface
Hole Size: 12-1/4"

KB:
DF:
GL: 3,827
Ini. Spud: 02/12/91
Ini. Comp: 04/12/91

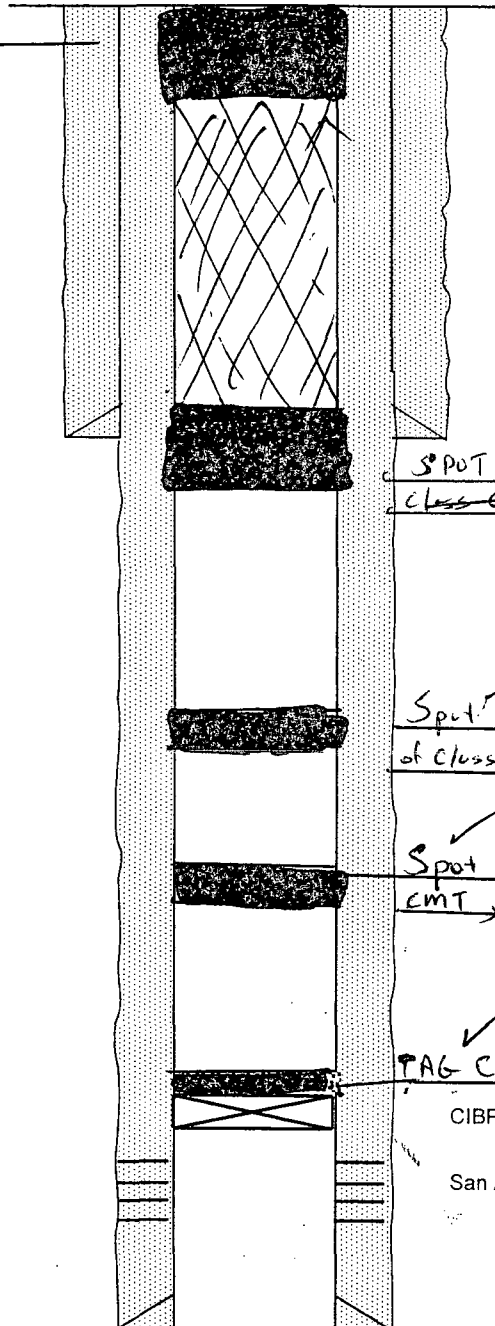

*60 x cmt. area
TO SURFACE*

*Spot Plug @ 525' - 325' w/ 30 sks of
class C cmt, (SHOE)*

*Spot Plug @ 2000' - 1800' w/ 30 sks
of class C cmt, TOC, WOC, TAG, (TOP OF SALT)*

*Spot Plug @ 3102 - 2902' w/ 30 sks of
cmt, TOC, WOC, TAG (BOTTOM SALT)*

TAG CIBP @ 4581' w/ 30 sks of class C cmt

CIBP @ 4581' capped with 50' cmt

San Andres Perfs: 4642'-5029'

Production Casing
Size: 5 1/2"
Wt., Grd.: 15.5#
Depth: 5109'
Sxs Cmt: 1525
Circulate: Yes
TOC: Surface
Hole Size: 7 7/8"