

Submit 1 Copy To Appropriate District
Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION

220 South St. Francis Dr.
Santa Fe, NM 87505

RECEIVED

JUL 31 2013

NOBIS OGD

WELL API NO. 30-025-31369
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Lovington San Andres Unit
8. Well Number: 75
9. OGRID Number: 241333
10. Pool name or Wildcat Lovington Grayburg San Andres

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other Water Injection

2. Name of Operator
Chevron Midcontinent, L.P.

3. Address of Operator
15 Smith Road Midland, TX 79705

4. Well Location
Unit Letter N : 145 feet from the NORTH line and 2625 feet from the WEST line
Section 36 Township 16-S Range 36-E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3834' GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-5070' PB 5023' Perfs 4635' - 5028' CIBP @ 4580'
8-5/8" 24# csg @ 410' w/300 sks, 12-1/4" hole, TOC: Surface
5-1/2" 15.5# csg @ 5070' w/1250 sks, 7-7/8" hole, TOC: Surface

1. MIRUWSU, NDWH, NUBOP
2. Tag CIBP @ 4580' w/25 sks of C cement.
3. Circulate well with 9.5 PPG plugging mud. Pressure Test casing to 500 psi and record/report findings.
4. Spot plug w/30 sks of C cement @ 3149' - 2949', ~~CTOC WOC & TAG~~ (Bottom of Salt)
5. Spot plug w/ 30 sks of C cement @ 2050' - 1850', ~~CTOC WOC & TAG~~ (Top of Salt)
6. Spot plug w/ 60 sks of Class C cement 510' - ~~3149'~~, ~~CTOC WOC & TAG~~ (Shoe)
7. ~~Plug & Circulate 40 sks of C cement @ 100' to Surface.~~
8. Cut off wellhead and anchors 3' below grade. Weld on dry hole marker. Clean location.

Spot 60 sks and @ 510'
Circ to Surface

- Cased-Loop System Used -

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Robert Holden TITLE Representative DATE 07/31/2013

Type or print name Robert Holden E-mail address: rholden@keyenergy.com PHONE: 432-523-5155
For State Use Only

APPROVED BY: [Signature] TITLE Dist MGR DATE 7-31-2013
Conditions of Approval (if any):

AUG 01 2013

Well: Lovington San Andres Unit #75

Field: Lovington

Reservoir: San Andres

Location:

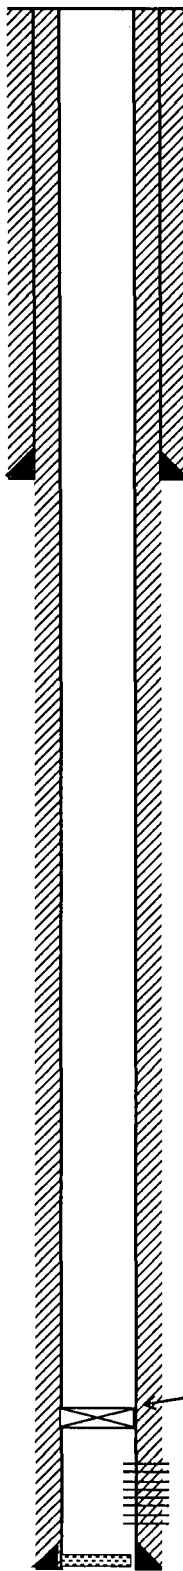
145' FSL & 2625' FWL
 Section: 36 (SE/4 SW/4)
 Township: 16S
 Range: 36E Unit: N
 County: Lea State: NM

Elevations:

GL: 3834
 KB: 3850
 DF: 3849

Log Formation Tops

Salt	
Base Salt	
Yates	3049
Seven Rivers	3293
Queen	3705
Grayburg	4388
San Andres	4597

Current Wellbore Diagram**Well ID Info:**

Chevno: OQ3285
 API No: 30-025-31369
 L5/L6:
 Spud Date: 10/7/91
 TD Reached: 10/15/91
 Compl. Date: 11/21/91

Surface Csg: 8 5/8" 24#

Set: @ 410 w/300 sx cmt
 Hole Size: 12 1/4" TO 410
 Circ: Yes TOC: surface
 TOC By: circulation

Initial Completion:

11/91 (San Andres)(2 JSPF) 4635-39, 4646-50, 4660-62, 4692-98, 4836-39, 4860-70,
 4886-92, 4921-25, 4951-55, 4966-68, 4981-85, 4990-98, 5008-14, 5016-20, 5024-28 ;
 A/51000 gal 20% NEFE

Subsequent Work

12/13/07 Sqz casing leak 1022' - 1054' with 100 sx cmt. Tested OK 12/14/07.
 6/16/08 Temp. abandoned. CIBP set @ 4580'.

TOP SALT 1950'

BOTTOM SALT 3049'

This wellbore diagram is based on the most recent information regarding wellbore configuration and equipment that could be found in the Midland Office wellfiles and computer databases as of the update below. Verify what is in the hole with the wellfile in the Lovington Field Office. Discuss w/WEO Engineer, WO Rep, OS, ALS, & FS prior to rigging up on well regarding any hazards or unknown issues pertaining to the well.

CIBP set @ 4580'
 (No cement reported)

Perfs

4635-39, 4646-50, 4660-62, 4692-98, 4836-39, 4860-70
 4886-92, 4921-25, 4951-55, 4966-68, 4981-85, 4990-98
 5008-14, 5016-20, 5024-28

Status

San Andres - open
 San Andres - open
 San Andres - open

Prod. Csg: 5 1/2" 15.5#
 Set: 5070 w/1250 sx cmt
 Hole Size: 7 7/8" to 5070
 Circ: Yes TOC: surface
 TOC By: circulation

TD: 5070 COTD: 5023 PBTD: 4580'

Updated: 7/25/2013 by Bob Hall

By: W.P. Johnson

Location:

145' FSL & 2625' FWL
 Section: 36 (SE/4 SW/4)
 Township: 16S
 Range: 36E Unit: N
 County: Lea State: NM

Elevations:

GL: 3834
 KB: 3850
 DF: 3849

Log Formation Tops

Salt	
Base Salt	
Yates	3049
Seven Rivers	3293
Queen	3705
Grayburg	4388
San Andres	4597

PROPOSED
Wellbore Diagram

**Well ID Info:**

Chevno: OQ3285
 API No: 30-025-31369
 L5/L6:
 Spud Date: 10/7/91
 TD Reached: 10/15/91
 Compl. Date: 11/21/91

Surface Csg: 8 5/8" 24#
 Set: @ 410 w/300 sx cmt
 Hole Size: 12 1/4" TO 410
 Circ: Yes TOC: surface
 TOC By: circulation

PERF & CIRCULATE 40 SKS OF CLASS C CEMENT @ 100' TO SURFACE

SPOT PLUG W/ 30 SKS OF CLASS C CEMENT @ 510' - ~~300'~~
 CIRC (SURF) *Circ cmt to surface*

14/07.

SPOT PLUG W/ 30 SKS @ 2050' TO 1850'
 WITH CLASS C CEMENT CIRC WOC &
~~TOC~~ (TOP OF SALT)

SPOT PLUG W/30 SKS OF CLASS C CEMENT
 @ 3149' TO 2949' CIRC, WOC & TAG
 (BOTTOM OF SALT)

TAG CIBP W/25 SKS OF CLASS C CEMENT

CIBP set @ 4580'
 (No cement reported)

Perfs

4635-39, 4646-50, 4660-62, 4692-98, 4836-39, 4860-70
 4886-92, 4921-25, 4951-55, 4966-68, 4981-85, 4990-98
 5008-14, 5016-20, 5024-28

Status

San Andres - open
 San Andres - open
 San Andres - open

Prod. Csg: 5 1/2" 15.5#
 Set: 5070 w/1250 sx cmt
 Hole Size: 7 7/8" to 5070
 Circ: Yes TOC: surface
 TOC By: circulation

TD: 5070 COTD: 5023 PBTD: 4580'