

District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

HOBBS OCD
AUG 19 2013
RECEIVED

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-34045
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name LEA AP STATE
8. Well Number 003
9. OGRID Number 162683
10. Pool name or Wildcat SWD; SAN ANDRES
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3,767' - GR

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☐ Other SWD

2. Name of Operator
CIMAREX ENERGY CO. OF COLORADO

3. Address of Operator
600 N. MARIENFELD, SUITE 600, MIDLAND, TEXAS 79701

4. Well Location
Unit Letter: J : 2000 feet from the SOUTH line and 2040 feet from the EAST line
Section 30 Township 19S Range 35E NMPM LEA County

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1) TAG EXISTING 5-1/2" CIBP + CMT. @ +/-5,775'; ATTEMPT TO CIRC. WELL W/ PXA FLUID.
- 2) PUMP 25 SXS. CMT. @ 5,383'-5,235' (T/S.A.); WOC X TAG CMT. PLUG.
- 3) PUMP 40 SXS. CMT. @ 3,508'-3,214' (T/YATES, B/SALT); WOC X TAG CMT. PLUG.
- 4) PUMP 40 SXS. CMT. @ 2,007'-1,750' (BAD CSG., T/SALT); WOC X TAG CMT. PLUG.
- 5) CIRC. TO SURF. 65 SXS. CMT. @ 500'-3'.
- 6) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; WELD ON STEEL PLATE TO CSGS. X INSTALL DRY HOLE MARKER.

DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYSTEM WITH A STEEL TANK AND HAUL CONTENTS TO THE REQUIRED DISPOSAL, PER OCD RULE 19.15.17.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

David A. Eyler

TITLE: AGENT

DATE: 432.687.3033

Type or print name: DAVID A. EYLER

E-mail address: DEYLER@MILAGRO-RES.COM PHONE: 432.687.3033

For State Use Only

APPROVED BY

[Signature]

TITLE

Dist MGR

DATE

8-21-2013

Conditions of Approval (if any):

OIL CONSERVATION DIVISION - Hobbs office Must Be Notified
24 hours prior to the beginning of Plugging Operations.

AUG 21 2013



Current Wellbore

Cimarex Energy Co. of Colorado

Lea AP State #3 SWD

2000' FSL & 2040' FEL

Sec 30, T19S R35E

Lea County, NM

API: 30-025-34045

KB: 3767' (14')

GL: 3753'

8 5/8" 24# J55 STC @ 449'

Cmt'd w/270 sx CI C, circ 60 sx

Tubing Detail: None

Bad Casing from 911' - 1957' (3/2010)

See well data tab

35' Cmt dumpbailed on CIBP

CIBP @ 5810' (10/7/2010)

San Andres Perfs:

5917'-5935' (72 holes), 5954'-5962' (32 holes)

w/4 SPF (.45" hole)

Acdz w/5300 gal 20% HCL

6040'-6054' (56 holes) w/4 SPF (.45" hole)

Acdz w/2200 gal 20% HCL

PBTD: 6165' (SLM)

TD: 6220'

5 1/2" 15.5# J55 LTC @ 6215'

Cmt'd w/1620 sx 35/65 POZ, tail w/125 sx CI C,
circ 66 sx

L. Lurg 10 22 09




KB: 3767' (14')
GL: 3753'

8 5/8" 24# J55 STC @ 449'
Cmt'd w/270 sx CI C, circ 60 sx

5 1/2" 15.5# J55 LTC @ 6215'
Cmt'd w/1620 sx 35/65 POZ, tail w/125 sx CI C,
circ 66 sx

Current Wellbore

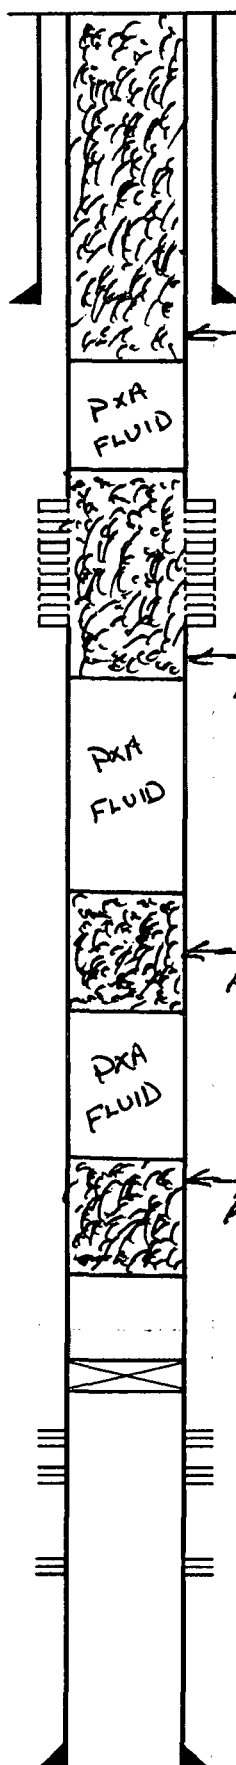

Cimarex Energy Co. of Colorado

Lea AP State #3 SWD

2000' FSL & 2040' FEL

Sec 30, T19S R35E

Lea County, NM

API: 30-025-34045

CIRC. 65 SXS. CMT. @ 500'-3'

Tubing Detail: None

Bad Casing from 911' - 1957' (3/2010)
See well data tab

Pump 40 SXS. CMT. @ 2007'-1750' - TAG

Pump 40 SXS. CMT. @ 3208'-3214' - TAG

Pump 25 SXS. CMT. @ 5385'-5235' - TAG

35' Cmt dumpbailed on CIBP

CIBP @ 5810' (10/7/2010)

San Andres Perfs:

5917'-5935' (72 holes), 5954'-5962' (32 holes)

w/4 SPF (.45" hole)

Acdz w/5300 gal 20% HCL

6040'-6054' (56 holes) w/4 SPF (.45" hole)

Acdz w/2200 gal 20% HCL

PBTD: 6165' (SLM)

TD: 6220'

DAE 08/15/13

L. Long 10/22/09