

District I - (575) 393-6161

HOBBS Energy, Minerals and Natural Resources

Revised July 18, 2013

1625 N. French Dr., Hobbs, NM 88240

District II - (575) 748-1283

811 S. First St., Artesia, NM 88210

District III - (505) 334-6178

1000 Rio Brazos Rd., Aztec, NM 87410

District IV - (505) 476-3460

1220 S. St. Francis Dr., Santa Fe, NM 87505

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

RECEIVED

WELL API NO. / 30-025-40400
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. 39009
7. Lease Name or Unit Agreement Name WC 35 State
8. Well Number 1
9. OGRID Number 256512
10. Pool name or Wildcat Sanmal; San Andres

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well Other

2. Name of Operator
CML Exploration, LLC

3. Address of Operator P.O. Box 890
Snyder, Texas 79550

4. Well Location
Unit Letter J : 2225 feet from the South line and 1960 feet from the East line
Section 35 Township S 16 Range 33 E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
4185' RKB

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

- PERFORM REMEDIAL WORK
- TEMPORARILY ABANDON
- PULL OR ALTER CASING
- DOWNHOLE COMMINGLE
- CLOSED-LOOP SYSTEM
- OTHER:
- PLUG AND ABANDON
- CHANGE PLANS
- MULTIPLE COMPL

SUBSEQUENT REPORT OF:

- REMEDIAL WORK
- COMMENCE DRILLING OPNS.
- CASING/CEMENT JOB
- OTHER:
- ALTERING CASING
- P AND A

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- MIRUPU. TIH and tag PBTD @ ± 4530'. LD 1 jt, RU cementers and circulate mud, adding salt gel as necessary to reach 9.5 #/gal.
- Spot 30 sx class "C" cement plug @ (4430' - 4530') woc/tag
- Spot ~~40~~ sx class "C" cement plug @ (1500' - ~~1600~~) 1630'
- Spot 30 sx class "C" cement plug @ (350' - 450')
- Spot ~~40~~ sx class "C" cement plug @ (3' - ~~40~~) 1600'
- RDMOPU. Cut off well head, weld on cap and dry hole marker. Remove anchors, trash and flowline. Haul off caliche from location and road. Replace with top soil.

Spud Date:

2/28/2012

Rig Release Date:

4/11/2012

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Jordan Owens TITLE Engineer DATE 10/1/2013

Type or print name Jordan Owens E-mail address: owensj@cmlxp.com PHONE: 325-573-0750

For State Use Only


APPROVED BY: [Signature] TITLE Dist-MGR DATE 10-3-2013

Conditions of Approval (if any):

OIL CONSERVATION DIVISION - Hobbs office **Must Be Notified**
24 hours prior to the beginning of Plugging Operations.

OCT 03 2013

CML EXPLORATION, LLC

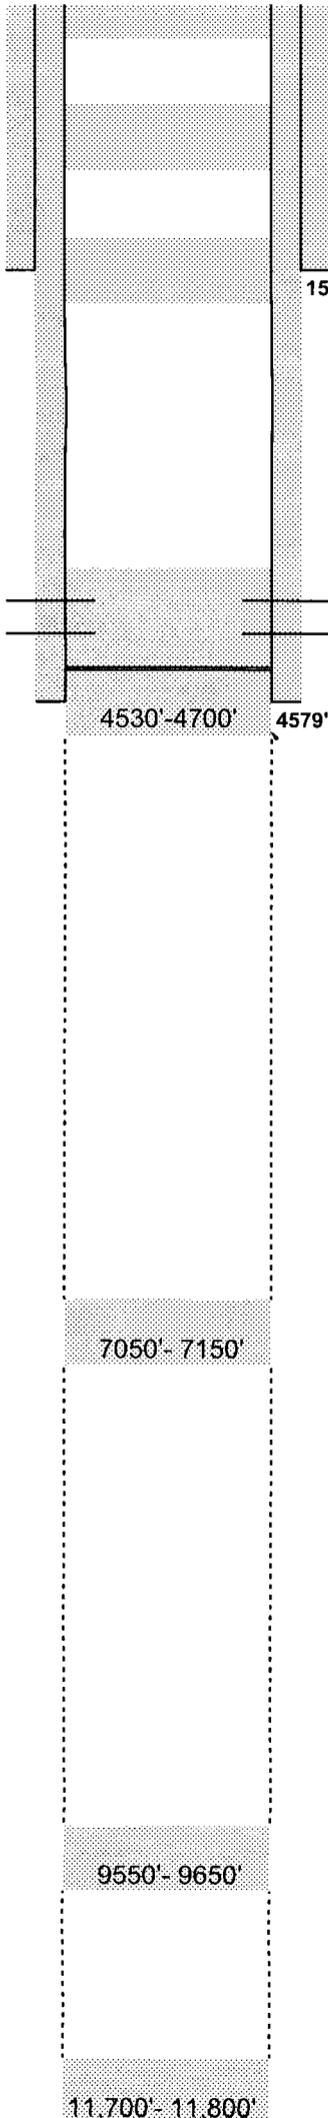

RKB 4185'
GL 4169'

Lease & Well No.: **WC 35 State # 1**

Well Category:
Area: **New Mexico**
Subarea: **Buckeye**
Legal Description: **API #30-025-40400**
J, 2225' FSL, 1960' FEL, Sec 35, T-16-S, R-33-E
Lea County, NM

Spudded: **2/28/2012**
TD: **04/07/2012**

Completed:

Stimulation: 5/10/12 2000 gals of 15% HCL acid
+ 25 ball sealers

1573'
17 1/2" hole
13 3/8" 54.5# J55
set @ 1573'
1715 sx cement

4579'
12 1/4" hole
8 5/8" 32# J-55
set @ 4579'
2150 sx cement.
TOC = surface

San Andres Perfs
(4518 - 26') 3 spf

PRESSURE DATA
5/14/12 - 72 Hr SI = 1394 psi

7050'- 7150'

Production Tbg
140 jts 2 7/8" 6.5# N80 tubing
2 7/8" SN @ 4488'
2 7/8" x 4' perf sub
1- jt 2 7/8" mud jt @ 4514'

9550'- 9650'

11,700'- 11,800'

PBTD: 4,530'
TD: 11,820'