

Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM
87505

HOBBS OCD

DEC 02 2013

RECEIVED

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, NM 87505WELL API NO.
30-025-22797

5. Indicate Type of Lease

STATE ☐ FEE ☒

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name

Rice Operating Co., San Andres SWD

Blinebry Drinkard

8. Well Number H-35

9. OGRID Number

19174

10. Pool name or Wildcat
San Andres SWD

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other SWD

2. Name of Operator

Rice Operating Company

3. Address of Operator

118 West Taylor, Hobbs NM 88240

4. Well Location

Unit Letter H : 1872 feet from the N line and 233 feet from the E line
Section 35 Township 22S Range 37E NMPM Lea County11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3293' ASL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒TEMPORARILY ABANDON ☐ CHANGE PLANS ☐PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐DOWNHOLE COMMINGLE ☐CLOSED-LOOP SYSTEM ☐OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐COMMENCE DRILLING OPNS. ☐ P AND A ☐CASING/CEMENT JOB ☐OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

It is the intention of Rice Operating Company to plug and abandon our Blinebry Drinkard SWD System SWD well H-35 as soon as a plugging rig becomes available. Per NMOC regulations, at least 48 hours notice will be given to the Hobbs, NM NMOC office before work is started. Please see attachments showing the present state of the well bore, the anticipated configuration of the well bore after plugging and abandoning, and the NMOC approved procedure that will be used to plug the well.

*** All fluids will be confined to steel holding pits during plugging and abandoning operations. As soon as the procedure has been accomplished, all steel holding pits will be emptied, and the contents of those pits will be disposed of at Sundance east of Eunice.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Marvin Burrows TITLE Well Specialist DATE 12/2/13Type or print name Marvin Burrows E-mail address: mburrows@riceswd.com PHONE: 575-393-9174

For State Use Only

APPROVED BY: Mark Whitaker TITLE Compliance Officer DATE 12-3-2013

Conditions of Approval (if any):

DEC 03 2013

Rice Operating Company

Plugging Procedure for BD H-35 SWD Well (API # 30-025-22797).

Well bore description :

9 5/8" casing at 1180', cement to surface.

7" casing at 3975', cement to surface.

Open hole disposal zone 3975' - 4918'.

CIBP at 4918'. TD 5250'.

2 7/8" IPC disposal tubing w/ Baker LokSet Pkr set at 3905'.

The approved OCD plugging procedure is as follows :

POH w/ tubing and packer.

Set CIBP at bottom of 7" casing (3970').

RIH w/ work string. Cap CIBP w/ 35 sack plug.

WOC, tag cement.

Circulate hole w/ MLF.

Spot 35 sack plug across base of salt at 2400' (above and below). WOC and tag.

Spot 35 sack plug across top of salt at 1230' (above and below). WOC and tag.

Fill 7" casing from 200' to surface.

RDMO plugging rig.


Cut off head, dead man anchors, erect dry hole marker, clean and level location per NMOCD requirements.

Rice Operating, Co. SWD well BD H-35

ULH-535-T225-R37E, Lea County NM

API 30-025-22797

* Before P&A

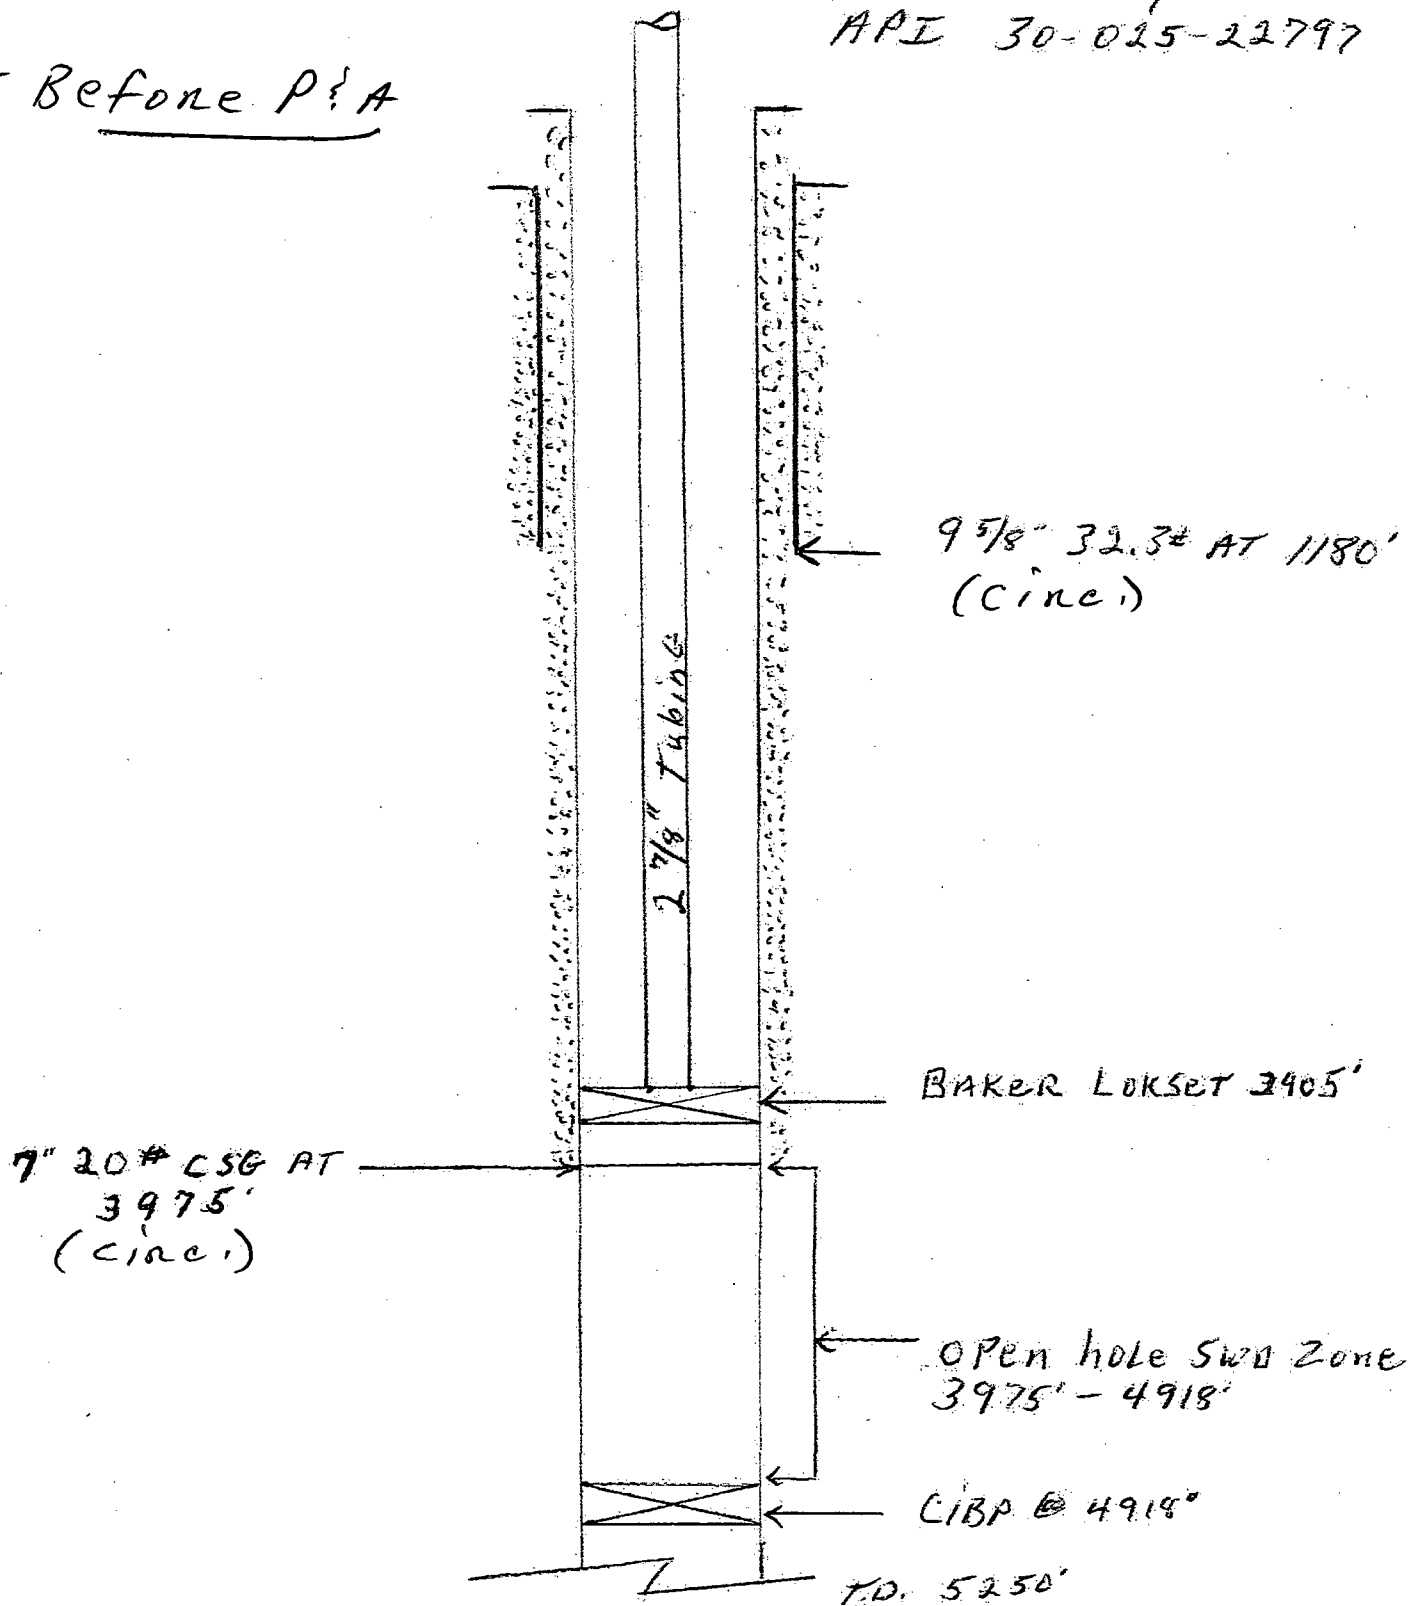

Rice Operating, CO. SWD well BD H-35

ULH-535-T22S-R37E, Lea County NM

API 30-015-22797

* After P/A

Fill 7" casing
w/ cement 200'
to surface.

35 SACK plug
Above top of
SALT @ 1230'
(Above & Below)

35 SACK plug
Above & Below
Bottom of SALT (2400')

7" 20# CSG AT
3975'
(Circ)

9 5/8" 32.3# AT 1180'
(Circ.)

CIBP @ 3970' w/ 35 SX Cap.

Open hole SWD Zone
3975' - 4918'

CIBP @ 4918'

T.D. 5250'

