

UNORTHODOX
LOCATION
Form 1000-1
(March 2012)

SECRETARY'S POTASH

Split Estate

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD Hobbs
HOBBS OCD

APPLICATION FOR PERMIT TO DRILL OR REENTER JAN 15 2014

FORM APPROVED
OMB No. 1004-0137
Expires October 31, 2014

1a. Type of Work ☒ DRILL ☐ REENTER

1b. Type of Well ☒ Oil Well ☐ Gas Well ☐ Other ☒ Single Zone ☐ Multiple Zone

2. Name of Operator
Cimarex Energy Co.

3a. Address
202 S. Cheyenne Ave., Ste 1000, Tulsa, OK 74103

3b. Phone No. (include area code)
918-585-1100

4. Location of Well (Report location clearly and in accordance with any State requirements.)*

At Surface 202 FNL & 1980 FEL
At proposed prod. Zone 330 FSL & 1980 FEL

14. Distance in miles and direction from nearest town or post office*

Eunice NM is 23 miles east of location

15. Distance from proposed* location to nearest property or lease line, ft. (Also to nearest drig. unit line if any)

202

16. No of acres in lease
NMNM124662=440 acres
NMLC0061144=80 acres
NMLC0064194=2000 acres

17. Spacing Unit dedicated to this well

160

18. Distance from proposed* location to nearest well, drilling, completed, applied for, on this lease, ft.

1226' to the #1

19. Proposed Depth
Pilot Hole TD: N/A
15,623 MD 10,900 TVD

20. BLM/BIA Bond No. on File

NM2575 NMB000835

21. Elevations (Show whether DF, KDB, RT, GL, etc.)

3653 GR

22. Approximate date work will start*

12/31/13

23. Estimated duration

35 days

24. Attachments

The following, completed in accordance with the requirements of Onshore Oil and Gas Order No. 1, shall be attached to this form:

- Well plat certified by a registered surveyor
- A Drilling Plan
- A Surface Use Plan (if the location is on National Forest System Lands, the SUPO shall be filed with the appropriate Forest Service Office).
- Bond to cover the operations unless covered by an existing bond on file (see Item 20 above).
- Operator Certification
- Such other site specific information and/or plans as may be required by the authorized officer.

25. Signature

Name (Printed/Typed)

Date

Title

Terri Stathem

8/20/13

Approved By (Signature)

Name (Printed/Typed)

Date

Title

STATE DIRECTOR

Office NM STATE OFFICE

JAN - 8 2014

Application approval does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.

Conditions of approval, if any, are attached.

APPROVAL FOR TWO YEARS

Title 18 U.S.S. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious, or fraudulent statements or representations as to any matter within its jurisdiction.

(Continued on page 2)

*(Instructions on page 2)

Capitan Controlled Water Basin

Approval Subject to General Requirements
& Special Stipulations Attached

SEE ATTACHED FOR
CONDITIONS OF APPROVAL

JAN 21 2014

Application to Drill
Perry 22 Federal Com #2H
 Cimarex Energy Co.
 UL: B, Sec. 22, 20S, 34E
 Lea Co., NM

8A. Casing Design and Casing Loading Assumptions:

Surface	Tension	A 1.8 design factor with effects of buoyancy: 8.30 ppg.
	Collapse	A 1.125 design factor with full internal evacuation and a collapse force equal to a 8.30 ppg mud gradient.
	Burst	A 1.125 design with a surface pressure equal to the fracture gradient at setting depth less gas gradient to surface.
Intermediate	Tension	A 1.8 design factor with effects of buoyancy: 10.00 ppg.
	Collapse	A 1.125 design factor evacuated 1/3 TVD of next casing string with a collapse force equal to a 10.00 ppg mud gradient.
	Burst	A 1.125 design with a surface pressure equal to the fracture gradient at setting depth less gas gradient to surface.
Production and/or Production Liner	Tension	A 1.8 design factor with effects of buoyancy: 9.00 ppg.
	Collapse	A 1.125 design factor with full internal evacuation of next casing string with a collapse force equal to a 9.00 ppg mud gradient.
	Burst	A 1.125 design with a surface pressure equal to the fracture gradient at setting depth less gas gradient to surface.

9. Cementing Program:

Casing Type	Type	Sacks	Yield	Weight	Cubic Feet	Cement Blend
Surface <i>13 3/8"</i>	Lead	1067	1.75	13.50		1867 Class C + Bentonite + Calcium Chloride + LCM, 8.829 gps water
	Tail	218	1.34	14.80		291 Class C + LCM, 6.32 gps water
	TOC: 0	85% Excess		Centralizers per Onshore Order 2.III.B.1f		
Intermediate <i>9 5/8"</i>	Lead	1254	1.88	12.90		2356 35:65 (poz/C) + Salt + Bentonite + LCM + retarder, 9.65 gps water
	Tail	292	1.34	14.80		391 Class C + retarder + LCM, 6.32 gps water
	TOC: 0	81% Excess				
Production <i>5 1/2"</i>	Lead	613	2.40	11.90		1471 35:65 (poz/H) + salt + Sodium Metasilicate + Bentonite + Fluid Loss + Dispersant + LCM + Retarder, 13.80 gps water
	Tail	1408	1.24	14.50		1745 50:50 (poz/H) + Bentonite + Salt + Fluid Loss + Dispersant + LCM + Retarder, 5.55 gps water
	TOC: 5000	25% Excess		No centralizers planned in the lateral section. 1 every jt from EOC to KOP. 1 every 4th joint from KOP to 500' inside previous casing.		

Cement volumes will be adjusted depending on hole size

9a. Proposed Drilling Plan:

Pilot Hole TD: No Pilot KOP: 10,598' EOC: 11,368'

Set Surface and Intermediate casing strings. Drill production hole to KOP. Continue drilling lateral through the curve to TD. Run prod casing & cement.

10. Pressure Control Equipment:

Exhibit "E-1". A BOP consisting of two rams with blind rams and pipe rams, and one annular preventer. Below the surface casing, a 2M system will be used. Below the intermediate casing, a 3M system will be used. See attachments for BOP and choke manifold diagrams. An accumulator that meets the requirements in Onshore Order #2 for the pressure rating of the BOP stack. A Rotating head may be installed as needed. A kelly cock will be installed and maintained in operable condition and a drill string safety valve in the open position will be available on the rig floor.

BOP and associated equipment will be installed, used, maintained, and tested in a manner necessary to assure well control and shall be in place and operational prior to drilling the surface casing shoe. The Annular Preventer shall be functioned at least weekly. The pipe and blind rams will be operated each trip. No abnormal pressure or temperature is expected while drilling.

BOPS will be tested by an independent service company. The ram preventers, choke manifold, and safety valves will be tested as follows: On the surface casing, pressure tests will be made to 250 psi low and 2000 psi high. On the intermediate casing, pressure tests will be made to 250 psi low and 3000 psi high.

The Annular Preventer will be tested to 250 psi low and 1000 psi high on the surface casing, and 250 low and 1500 high on the intermediate casing.

see COA
 Cimarex Energy Co. of Colorado requests a variance to drill this well using a co-flex line between the BOP and choke manifold. Certification for proposed co-flex hose is attached (please see Exhibit F, F-1, F-2, F-3). The hose is not required by the manufacturer to be anchored. In the event the specific hose is not available, one of equal or higher rating will be used.

Application to Drill
Perry 22 Federal Com #2H
Cimarex Energy Co.
UL: B, Sec. 22, 20S, 34E
Lea Co., NM

See COA

11. Proposed Mud Circulating System:

Depth	Mud Weight	Visc	Fluid Loss	Type Mud
0' to 1680'		8.30:28	NC	FW Spud Mud
1680' to 5500'		10.00 30-32	NC	Brine Water
5500' to 15623'		9.00 30-32	NC	FW/Cut Brine

Sufficient mud materials will be kept on location at all times in order to combat lost circulation or unexpected kicks. In order to run DSTs, open hole logs, and casing, the viscosity and water loss may have to be adjusted in order to meet these needs.

The Mud Monitoring System is an electronic Pason System satisfying requirements of Onshore Order 1.

12. Testing, Logging and Coring Program:

- A. Mud logging program: 2 man unit from 5600 to TD
- B. Electric logging program: CNL / LDT / CAL / GR, DLL /GR -- Inter. Csg to TD
CNL /GR -- Surf to Inter. Csg
- C. No DSTs or cores are planned at this time
- D. CBL w/ CCL from as far as gravity will let it fall to TOC

13. Potential Hazards: See COA

No abnormal pressures or temperatures are expected. In accordance with Onshore Order 6, Cimarex does not anticipate that there will be enough H₂S from the surface to the Bone Spring formations to meet the BLM's minimum requirements for the submission of an "H₂S Drilling Operation Plan" or "Public Protection Plan" for the drilling and completion of this well. Since we have an H₂S Safety package on all wells, attached is an "H₂S Drilling Operations Plan." Adequate flare lines will be installed off the mud / gas separator where gas may be flared safely. All personnel will be familiar with all aspects of safe operation of equipment being used.

Estimated BHP: 4905 psi

Estimated BHT: 168°

14. Construction and Drilling:

Road and location construction will begin after BLM approval of APD. Anticipated spud date as soon as approved.
Drilling expected to take: 35 days.
If production casing is run an additional 30 days will be required to complete and construct surface facilities.

15. Other Facets of Operations:


If production casing is run an additional 30 days will be required to complete and construct surface facilities.
Bone Spring pay will be perforated and stimulated.
The proposed well will be tested and potentialized as **Oil**



Cimarex Energy

PATHFINDER
A Schlumberger Company

WELL		Perry 22 Federal 2H		FIELD		NM Lea County (NAD 83)		STRUCTURE		Cimarex Perry 22 Federal 2H	
Magnetic Parameters											
Model: BGM 2012		Dip: 60.054°		Date: November 12, 2013		Surface Location		NAD83 New Mexico State Plane, Eastern Zone, US Feet		Miscellaneous	
Mag Dec: 7.412°		FB: 49543 Ref		Lat: N 32 33 55.168		Lon: W 103 32 45.399		Northing: 570292.70 RUS		Slot: Perry 22 Federal 2H	
								Easting: 763912.00 RUS		Plan: Cimarex Energy Perry 22 Federal 2H Rev1/TP12/Nov-13	
								Scale Factor: 0.9997648		TVD Ref: Ground Level (DBS11 above MSL)	

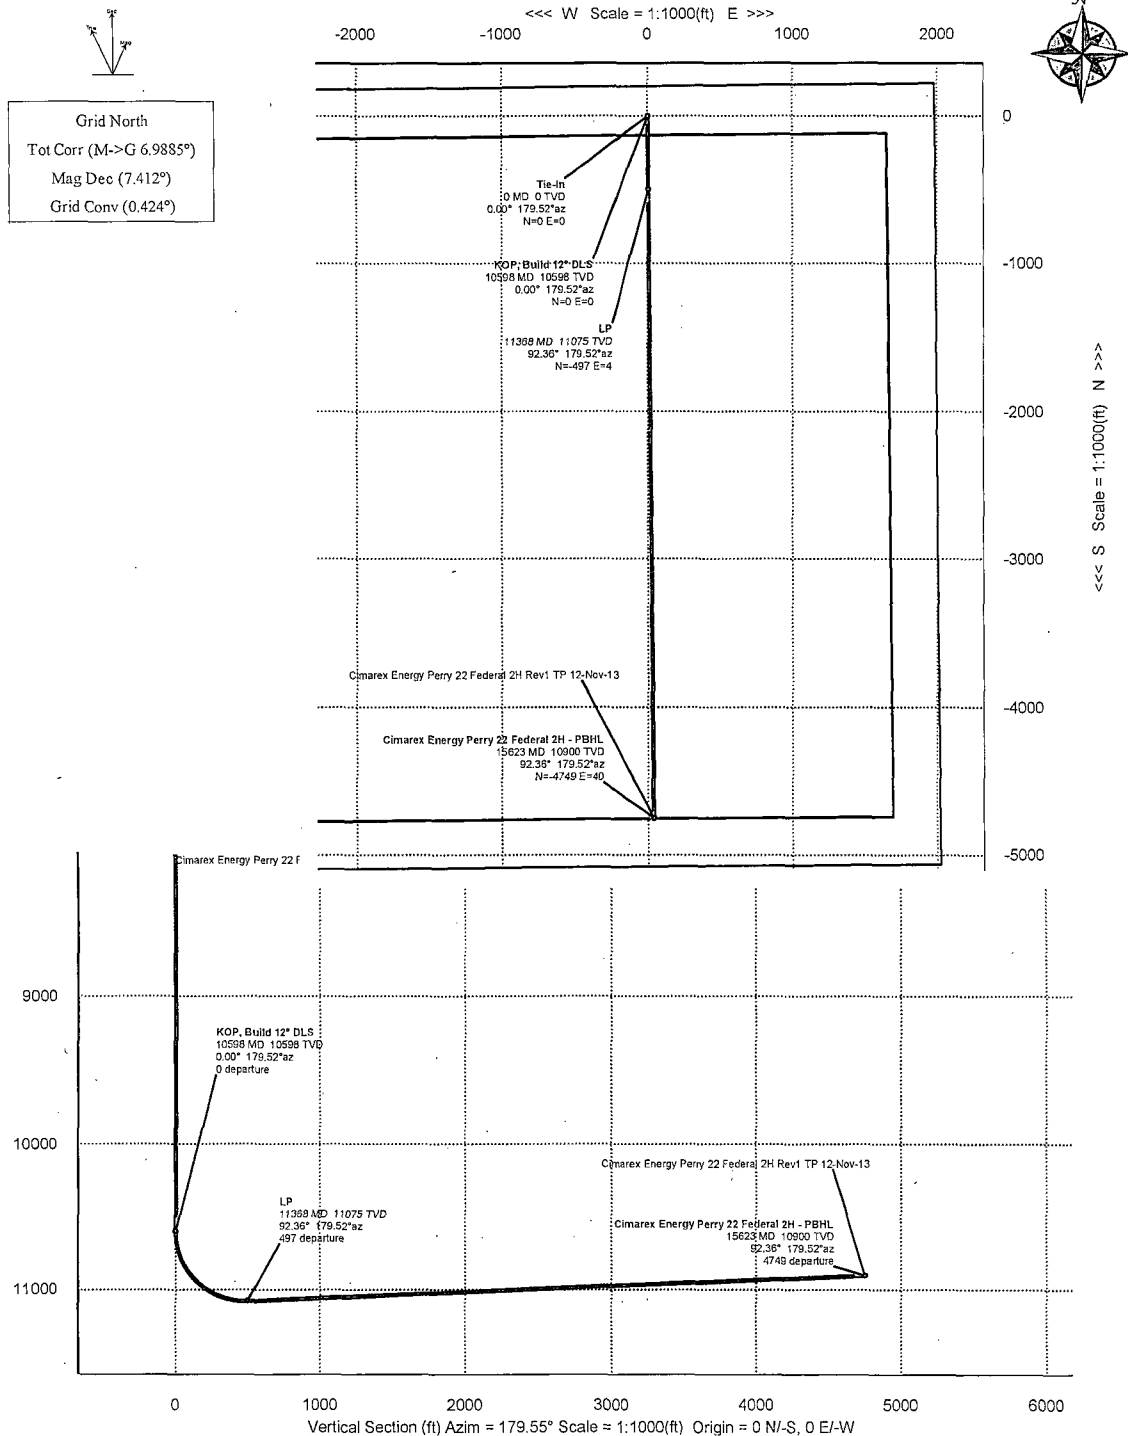

Critical Points

Critical Point	MD	INCL	AZIM	TVD	VSEC	N(+)/S(-)	E(+)/W(-)	DLS
Tie-In	0.00	0.00	179.52	0.00	0.00	0.00	0.00	
KOP, Build 12° DLS	10598.00	0.00	179.52	10598.00	0.00	0.00	0.00	0.00
LP	11367.53	92.36	179.52	11075.00	497.02	-497.00	4.16	12.00
Cimarex Energy Perry 22 Federal 2H - PBHL	15623.19	92.36	179.52	10900.00	4749.09	-4748.92	39.60	0.00

Cimarex Energy Perry 22 Federal 2H Rev1 TP 12-Nov-13 Proposal Report

(Def Plan)

Report Date: November 12, 2013 - 10:24 AM
Client: Cimarex Energy
Field: NM Lea County (NAD 83)
Structure / Slot: Cimarex Perry 22 Federal 2H / Perry 22 Federal 2H
Well: Perry 22 Federal 2H
Borehole: Original Borehole
UWI / API#: Unknown / Unknown
Survey Name: Cimarex Energy Perry 22 Federal 2H Rev1 TP 12-Nov-13
Survey Date: July 10, 2013
Tort / AHD / DDI / ERD Ratio: 92.361 ° / 4749.086 ft / 5.792 / 0.429
Coordinate Reference System: NAD83 New Mexico State Plane, Eastern Zone, US Feet
Location Lat / Long: N 32° 33' 55.16580", W 103° 32' 45.39907"
Location Grid N/E Y/X: N 570292.700 RUS, E 783912.500 ftUS
CRS Grid Convergence Angle: 0.4238 °
Grid Scale Factor: 0.99997648

Survey / DLS Computation: Minimum Curvature / Lubinski
Vertical Section Azimuth: 179.554 ° (Grid North)
Vertical Section Origin: 0.000 ft, 0.000 ft
TVD Reference Datum: Ground Level
TVD Reference Elevation: 3653.000 ft above MSL
Seabed / Ground Elevation: 3653.000 ft above MSL
Magnetic Declination: 7.412 °
Total Field Strength: 48542.835 nT
Magnetic Dip Angle: 60.404 °
Declination Date: November 12, 2013
Magnetic Declination Model: BGGM 2012
North Reference: Grid North
Grid Convergence Used: 0.4238 °
Total Corr Mag North->Grid North: 6.9885 °
Local Coord Referenced To: Structure Reference Point

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' '')	Longitude (E/W ° ' '')	Closure (ft)	Closure Azimuth (°)	DLS ('/100ft)
Tie-In	0.00	0.00	179.52	0.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	N/A
	100.00	0.00	179.52	100.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	200.00	0.00	179.52	200.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	300.00	0.00	179.52	300.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	400.00	0.00	179.52	400.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	500.00	0.00	179.52	500.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	600.00	0.00	179.52	600.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	700.00	0.00	179.52	700.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	800.00	0.00	179.52	800.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	900.00	0.00	179.52	900.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	1000.00	0.00	179.52	1000.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	1100.00	0.00	179.52	1100.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	1200.00	0.00	179.52	1200.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	1300.00	0.00	179.52	1300.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	1400.00	0.00	179.52	1400.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	1500.00	0.00	179.52	1500.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	1600.00	0.00	179.52	1600.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	1700.00	0.00	179.52	1700.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	1800.00	0.00	179.52	1800.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	1900.00	0.00	179.52	1900.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	2000.00	0.00	179.52	2000.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	2100.00	0.00	179.52	2100.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	2200.00	0.00	179.52	2200.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	2300.00	0.00	179.52	2300.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	2400.00	0.00	179.52	2400.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	2500.00	0.00	179.52	2500.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	2600.00	0.00	179.52	2600.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	2700.00	0.00	179.52	2700.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	2800.00	0.00	179.52	2800.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	2900.00	0.00	179.52	2900.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	3000.00	0.00	179.52	3000.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")	Closure (ft)	Closure Azimuth (°)	DLS (°/100ft)
	3100.00	0.00	179.52	3100.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	3200.00	0.00	179.52	3200.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	3300.00	0.00	179.52	3300.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	3400.00	0.00	179.52	3400.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	3500.00	0.00	179.52	3500.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	3600.00	0.00	179.52	3600.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	3700.00	0.00	179.52	3700.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	3800.00	0.00	179.52	3800.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	3900.00	0.00	179.52	3900.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	4000.00	0.00	179.52	4000.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	4100.00	0.00	179.52	4100.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	4200.00	0.00	179.52	4200.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	4300.00	0.00	179.52	4300.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	4400.00	0.00	179.52	4400.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	4500.00	0.00	179.52	4500.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	4600.00	0.00	179.52	4600.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	4700.00	0.00	179.52	4700.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	4800.00	0.00	179.52	4800.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	4900.00	0.00	179.52	4900.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	5000.00	0.00	179.52	5000.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	5100.00	0.00	179.52	5100.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	5200.00	0.00	179.52	5200.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	5300.00	0.00	179.52	5300.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	5400.00	0.00	179.52	5400.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	5500.00	0.00	179.52	5500.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	5600.00	0.00	179.52	5600.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	5700.00	0.00	179.52	5700.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	5800.00	0.00	179.52	5800.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	5900.00	0.00	179.52	5900.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	6000.00	0.00	179.52	6000.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	6100.00	0.00	179.52	6100.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	6200.00	0.00	179.52	6200.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	6300.00	0.00	179.52	6300.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	6400.00	0.00	179.52	6400.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	6500.00	0.00	179.52	6500.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	6600.00	0.00	179.52	6600.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	6700.00	0.00	179.52	6700.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	6800.00	0.00	179.52	6800.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	6900.00	0.00	179.52	6900.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	7000.00	0.00	179.52	7000.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	7100.00	0.00	179.52	7100.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	7200.00	0.00	179.52	7200.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	7300.00	0.00	179.52	7300.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	7400.00	0.00	179.52	7400.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	7500.00	0.00	179.52	7500.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	7600.00	0.00	179.52	7600.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	7700.00	0.00	179.52	7700.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	7800.00	0.00	179.52	7800.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	7900.00	0.00	179.52	7900.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	8000.00	0.00	179.52	8000.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	8100.00	0.00	179.52	8100.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	8200.00	0.00	179.52	8200.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	8300.00	0.00	179.52	8300.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	8400.00	0.00	179.52	8400.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	8500.00	0.00	179.52	8500.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")	Closure (ft)	Closure Azimuth (°)	DLS (°/100ft)
	8600.00	0.00	179.52	8600.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	8700.00	0.00	179.52	8700.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	8800.00	0.00	179.52	8800.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	8900.00	0.00	179.52	8900.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	9000.00	0.00	179.52	9000.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	9100.00	0.00	179.52	9100.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	9200.00	0.00	179.52	9200.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	9300.00	0.00	179.52	9300.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	9400.00	0.00	179.52	9400.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	9500.00	0.00	179.52	9500.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	9600.00	0.00	179.52	9600.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	9700.00	0.00	179.52	9700.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	9800.00	0.00	179.52	9800.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	9900.00	0.00	179.52	9900.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	10000.00	0.00	179.52	10000.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	10100.00	0.00	179.52	10100.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	10200.00	0.00	179.52	10200.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	10300.00	0.00	179.52	10300.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	10400.00	0.00	179.52	10400.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
KOP, Build 12" DLS	10500.00	0.00	179.52	10500.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	10598.00	0.00	179.52	10598.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	0.00	0.00
	10600.00	0.24	179.52	10600.00	0.00	0.00	0.00	570292.70	783912.50	N 32 33 55.17	W 103 32 45.40	0.00	179.52	12.00
	10700.00	12.24	179.52	10699.23	10.86	-10.85	0.09	570281.85	783912.59	N 32 33 55.06	W 103 32 45.40	10.86	179.52	12.00
	10800.00	24.24	179.52	10794.03	42.10	-42.10	0.35	570250.60	783912.85	N 32 33 54.75	W 103 32 45.40	42.10	179.52	12.00
	10900.00	36.24	179.52	10880.26	92.38	-92.37	0.77	570200.33	783913.27	N 32 33 54.25	W 103 32 45.40	92.38	179.52	12.00
	11000.00	48.25	179.52	10954.15	159.49	-159.48	1.34	570133.22	783913.84	N 32 33 53.59	W 103 32 45.40	159.49	179.52	12.00
	11100.00	60.25	179.52	11012.47	240.49	-240.48	2.01	570052.22	783914.51	N 32 33 52.79	W 103 32 45.40	240.49	179.52	12.00
	11200.00	72.25	179.52	11052.68	331.85	-331.84	2.78	569960.87	783915.28	N 32 33 51.88	W 103 32 45.40	331.85	179.52	12.00
	11300.00	84.25	179.52	11073.00	429.58	-429.57	3.60	569863.15	783916.10	N 32 33 50.92	W 103 32 45.39	429.58	179.52	12.00
LP	11367.53	92.36	179.52	11075.00	497.02	-497.00	4.16	569795.71	783916.66	N 32 33 50.25	W 103 32 45.39	497.02	179.52	12.00
	11400.00	92.36	179.52	11073.67	529.47	-529.45	4.44	569763.27	783916.94	N 32 33 49.93	W 103 32 45.39	529.47	179.52	0.00
	11500.00	92.36	179.52	11069.56	629.38	-629.36	5.27	569663.36	783917.77	N 32 33 48.94	W 103 32 45.39	629.38	179.52	0.00
	11600.00	92.36	179.52	11065.45	729.30	-729.27	6.11	569563.45	783918.61	N 32 33 47.95	W 103 32 45.39	729.30	179.52	0.00
	11700.00	92.36	179.52	11061.34	829.21	-829.18	6.95	569463.54	783919.45	N 32 33 46.96	W 103 32 45.39	829.21	179.52	0.00
	11800.00	92.36	179.52	11057.23	929.13	-929.10	7.78	569363.63	783920.28	N 32 33 45.97	W 103 32 45.39	929.13	179.52	0.00
	11900.00	92.36	179.52	11053.12	1029.04	-1029.01	8.62	569263.72	783921.12	N 32 33 44.98	W 103 32 45.39	1029.04	179.52	0.00
	12000.00	92.36	179.52	11049.01	1128.96	-1128.92	9.45	569163.81	783921.95	N 32 33 44.00	W 103 32 45.39	1128.96	179.52	0.00
	12100.00	92.36	179.52	11044.90	1228.88	-1228.83	10.29	569063.90	783922.79	N 32 33 43.01	W 103 32 45.39	1228.88	179.52	0.00
	12200.00	92.36	179.52	11040.79	1328.79	-1328.74	11.12	568963.99	783923.62	N 32 33 42.02	W 103 32 45.38	1328.79	179.52	0.00
	12300.00	92.36	179.52	11036.68	1428.71	-1428.66	11.96	568864.08	783924.46	N 32 33 41.03	W 103 32 45.38	1428.71	179.52	0.00
	12400.00	92.36	179.52	11032.57	1528.62	-1528.57	12.80	568764.17	783925.29	N 32 33 40.04	W 103 32 45.38	1528.62	179.52	0.00
	12500.00	92.36	179.52	11028.46	1628.54	-1628.48	13.63	568664.26	783926.13	N 32 33 39.05	W 103 32 45.38	1628.54	179.52	0.00
	12600.00	92.36	179.52	11024.35	1728.45	-1728.39	14.45	568564.35	783926.96	N 32 33 38.06	W 103 32 45.38	1728.45	179.52	0.00
	12700.00	92.36	179.52	11020.23	1828.37	-1828.30	15.30	568464.44	783927.80	N 32 33 37.07	W 103 32 45.38	1828.37	179.52	0.00
	12800.00	92.36	179.52	11016.12	1928.28	-1928.22	16.13	568364.53	783928.63	N 32 33 36.09	W 103 32 45.38	1928.28	179.52	0.00
	12900.00	92.36	179.52	11012.01	2028.20	-2028.13	16.97	568264.62	783929.47	N 32 33 35.10	W 103 32 45.38	2028.20	179.52	0.00
	13000.00	92.36	179.52	11007.90	2128.11	-2128.04	17.80	568164.71	783930.30	N 32 33 34.11	W 103 32 45.38	2128.11	179.52	0.00
	13100.00	92.36	179.52	11003.79	2228.03	-2227.95	18.63	568064.80	783931.13	N 32 33 33.12	W 103 32 45.37	2228.03	179.52	0.00
	13200.00	92.36	179.52	10999.68	2327.95	-2327.86	19.47	567964.90	783931.97	N 32 33 32.13	W 103 32 45.37	2327.95	179.52	0.00
	13300.00	92.36	179.52	10995.57	2427.86	-2427.78	20.30	567864.99	783932.80	N 32 33 31.14	W 103 32 45.37	2427.86	179.52	0.00
	13400.00	92.36	179.52	10991.45	2527.78	-2527.69	21.13	567765.08	783933.63	N 32 33 30.15	W 103 32 45.37	2527.78	179.52	0.00
	13500.00	92.36	179.52	10987.34	2627.69	-2627.60	21.97	567665.17	783934.47	N 32 33 29.17	W 103 32 45.37	2627.69	179.52	0.00
	13600.00	92.36	179.52	10983.23	2727.61	-2727.51	22.80	567565.26	783935.30	N 32 33 28.18	W 103 32 45.37	2727.61	179.52	0.00
	13700.00	92.36	179.52	10979.12	2827.52	-2827.42	23.63	567465.35	783936.13	N 32 33 27.19	W 103 32 45.37	2827.52	179.52	0.00

Comments	MD (ft)	Incl (°)	Azim Grid (°)	TVD (ft)	VSEC (ft)	NS (ft)	EW (ft)	Northing (ftUS)	Easting (ftUS)	Latitude (N/S ° ' ")	Longitude (E/W ° ' ")	Closure (ft)	Closure Azimuth (°)	DLS (%/100ft)
	13800.00	92.36	179.52	10975.00	2927.44	-2927.34	24.46	567365.44	783936.96	N 32 33 26.20	W 103 32 45.37	2927.44	179.52	0.00
	13900.00	92.36	179.52	10970.89	3027.35	-3027.25	25.30	567265.53	783937.80	N 32 33 25.21	W 103 32 45.37	3027.35	179.52	0.00
	14000.00	92.36	179.52	10966.78	3127.27	-3127.16	26.13	567165.62	783938.63	N 32 33 24.22	W 103 32 45.36	3127.27	179.52	0.00
	14100.00	92.36	179.52	10962.67	3227.18	-3227.07	26.96	567055.71	783939.46	N 32 33 23.23	W 103 32 45.36	3227.18	179.52	0.00
	14200.00	92.36	179.52	10958.55	3327.10	-3326.98	27.79	566965.80	783940.29	N 32 33 22.25	W 103 32 45.36	3327.10	179.52	0.00
	14300.00	92.36	179.52	10954.44	3427.01	-3426.90	28.62	566865.89	783941.12	N 32 33 21.26	W 103 32 45.36	3427.02	179.52	0.00
	14400.00	92.36	179.52	10950.33	3526.93	-3526.81	29.45	566765.98	783941.95	N 32 33 20.27	W 103 32 45.36	3526.93	179.52	0.00
	14500.00	92.36	179.52	10946.21	3626.85	-3626.72	30.28	566666.07	783942.78	N 32 33 19.28	W 103 32 45.36	3626.85	179.52	0.00
	14600.00	92.36	179.52	10942.10	3726.76	-3726.63	31.11	566566.16	783943.61	N 32 33 18.29	W 103 32 45.36	3726.76	179.52	0.00
	14700.00	92.36	179.52	10937.99	3826.68	-3826.54	31.94	566466.25	783944.44	N 32 33 17.30	W 103 32 45.36	3826.68	179.52	0.00
	14800.00	92.36	179.52	10933.87	3926.59	-3926.46	32.78	566366.35	783945.27	N 32 33 16.31	W 103 32 45.36	3926.59	179.52	0.00
	14900.00	92.36	179.52	10929.76	4026.51	-4026.37	33.60	566266.44	783946.10	N 32 33 15.33	W 103 32 45.35	4026.51	179.52	0.00
	15000.00	92.36	179.52	10925.64	4126.42	-4126.28	34.43	566166.53	783946.93	N 32 33 14.34	W 103 32 45.35	4126.42	179.52	0.00
	15100.00	92.36	179.52	10921.53	4226.34	-4226.19	35.26	566066.62	783947.76	N 32 33 13.35	W 103 32 45.35	4226.34	179.52	0.00
	15200.00	92.36	179.52	10917.41	4326.25	-4326.10	36.09	565966.71	783948.59	N 32 33 12.36	W 103 32 45.35	4326.25	179.52	0.00
	15300.00	92.36	179.52	10913.30	4426.17	-4426.01	36.92	565866.80	783949.42	N 32 33 11.37	W 103 32 45.35	4426.17	179.52	0.00
	15400.00	92.36	179.52	10909.18	4526.08	-4525.93	37.75	565766.89	783950.25	N 32 33 10.38	W 103 32 45.35	4526.08	179.52	0.00
	15500.00	92.36	179.52	10905.07	4626.00	-4625.84	38.58	565666.98	783951.08	N 32 33 9.39	W 103 32 45.35	4626.00	179.52	0.00
	15600.00	92.36	179.52	10900.95	4725.91	-4725.75	39.41	565567.07	783951.91	N 32 33 8.40	W 103 32 45.35	4725.91	179.52	0.00
Cimarex Energy Perry 22 Federal 2H - PBHL	15623.19	92.36	179.52	10900.00	4749.09	-4748.92	39.60	565543.90	783952.10	N 32 33 8.18	W 103 32 45.35	4749.09	179.52	0.00

Survey Type: Def Plan

Survey Error Model: ISCWSA Rev 0 *** 3-D 95.000% Confidence 2.7955 sigma
Survey Program:

Description	MD From (ft)	MD To (ft)	EOU Freq (ft)	Hole Size (in)	Casing Diameter (in)	Survey Tool Type	Borehole / Survey
	0.000	10598.000	1/100.000	30.000	30.000	SLB_NSG+MSHOT	Original Borehole / Cimarex Energy Perry 22 Federal 2H Rev1
	10598.000	15623.192	1/100.000	30.000	30.000	SLB_MWD-STD	Original Borehole / Cimarex Energy Perry 22 Federal 2H Rev1

Drilling 12-1/4" hole
below 13 3/8" Casing


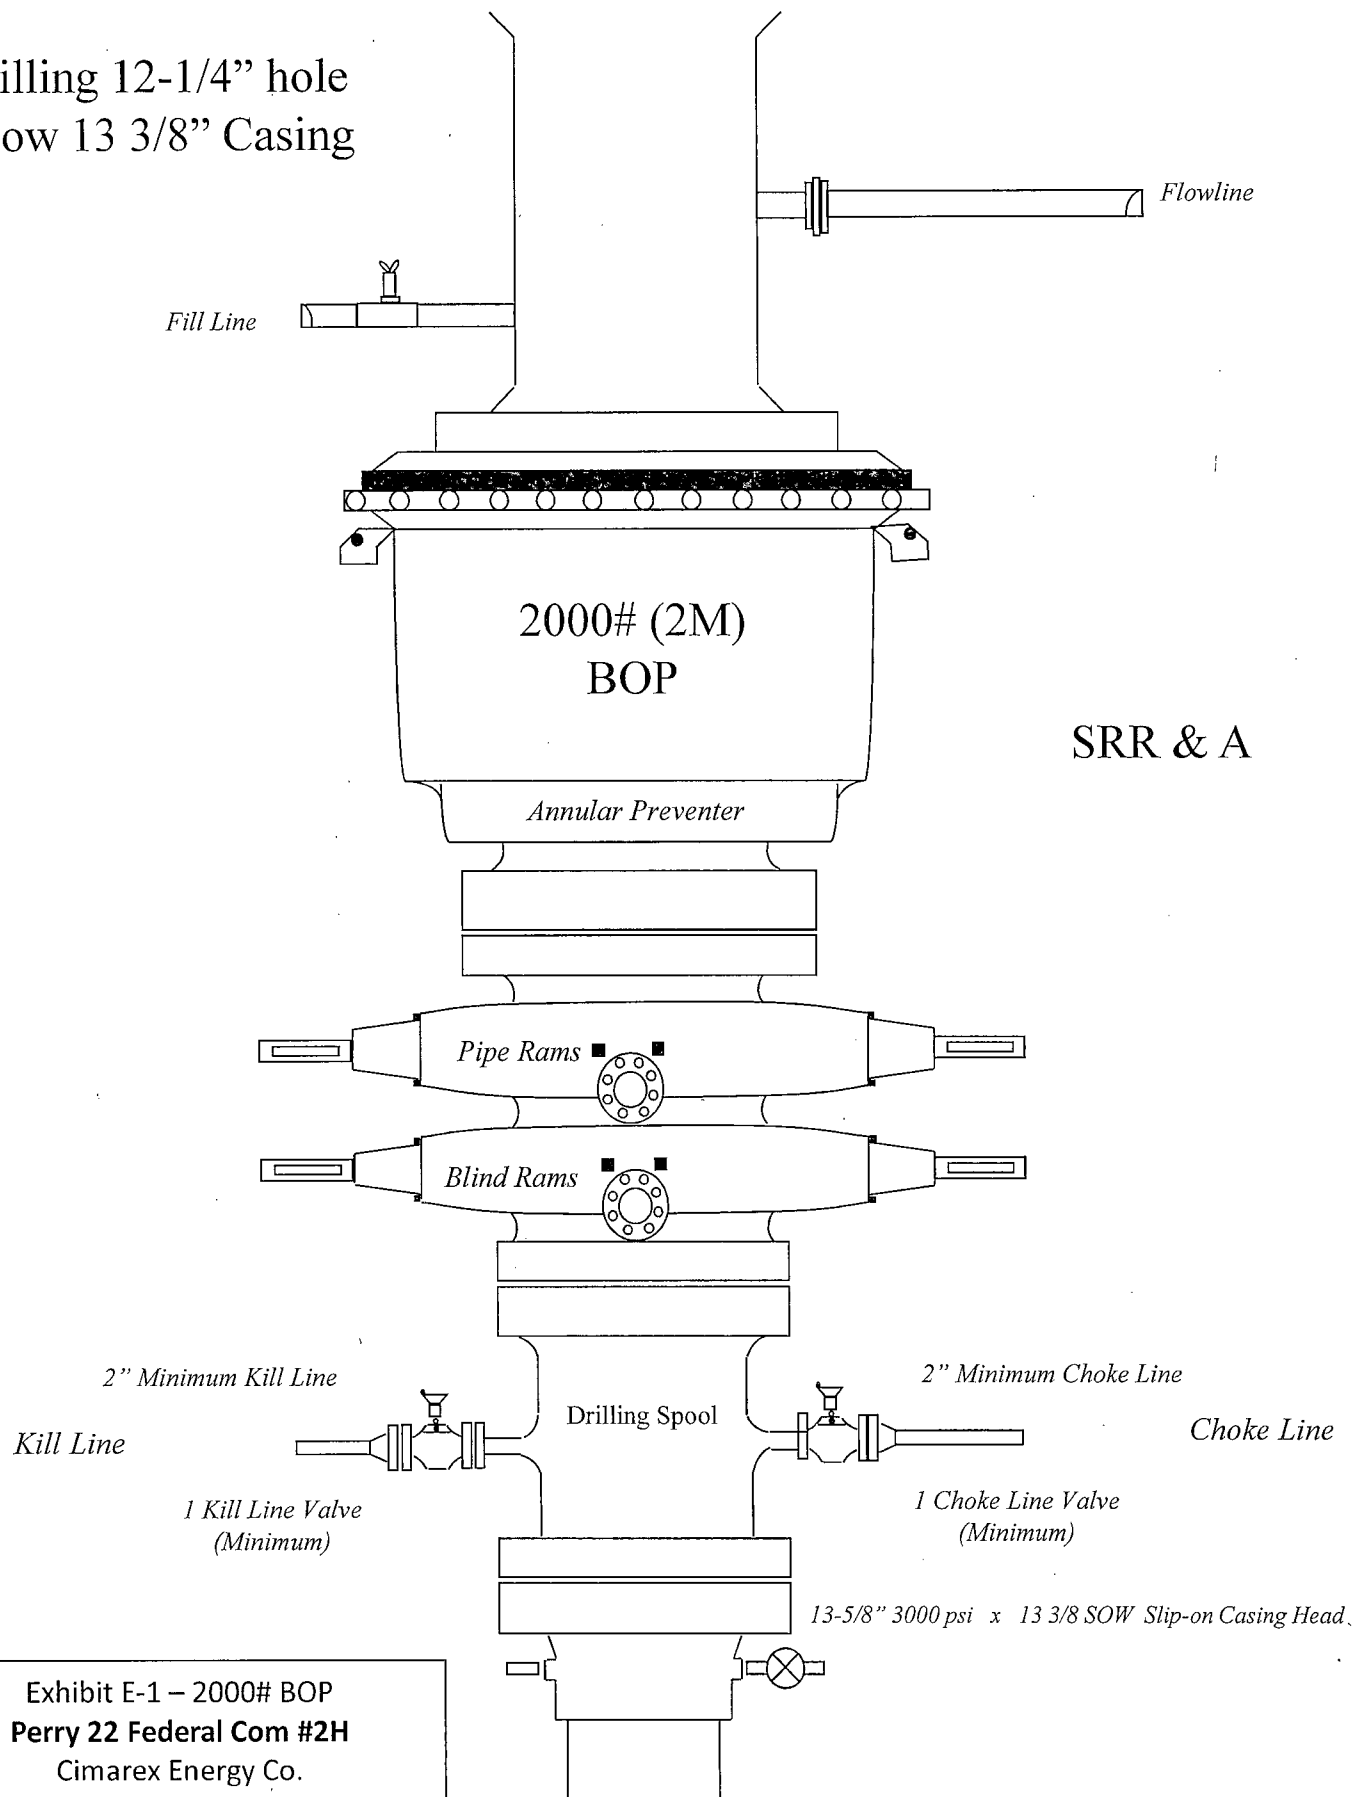


Exhibit E-1 – 2000# BOP
Perry 22 Federal Com #2H
Cimarex Energy Co.
22-20S-34E
SHL 202 FNL & 1980 FEL
BHL 330 FSL & 1980 FEL
Lea County, NM


Drilling 8-3/4" hole
below 9 5/8" Casing

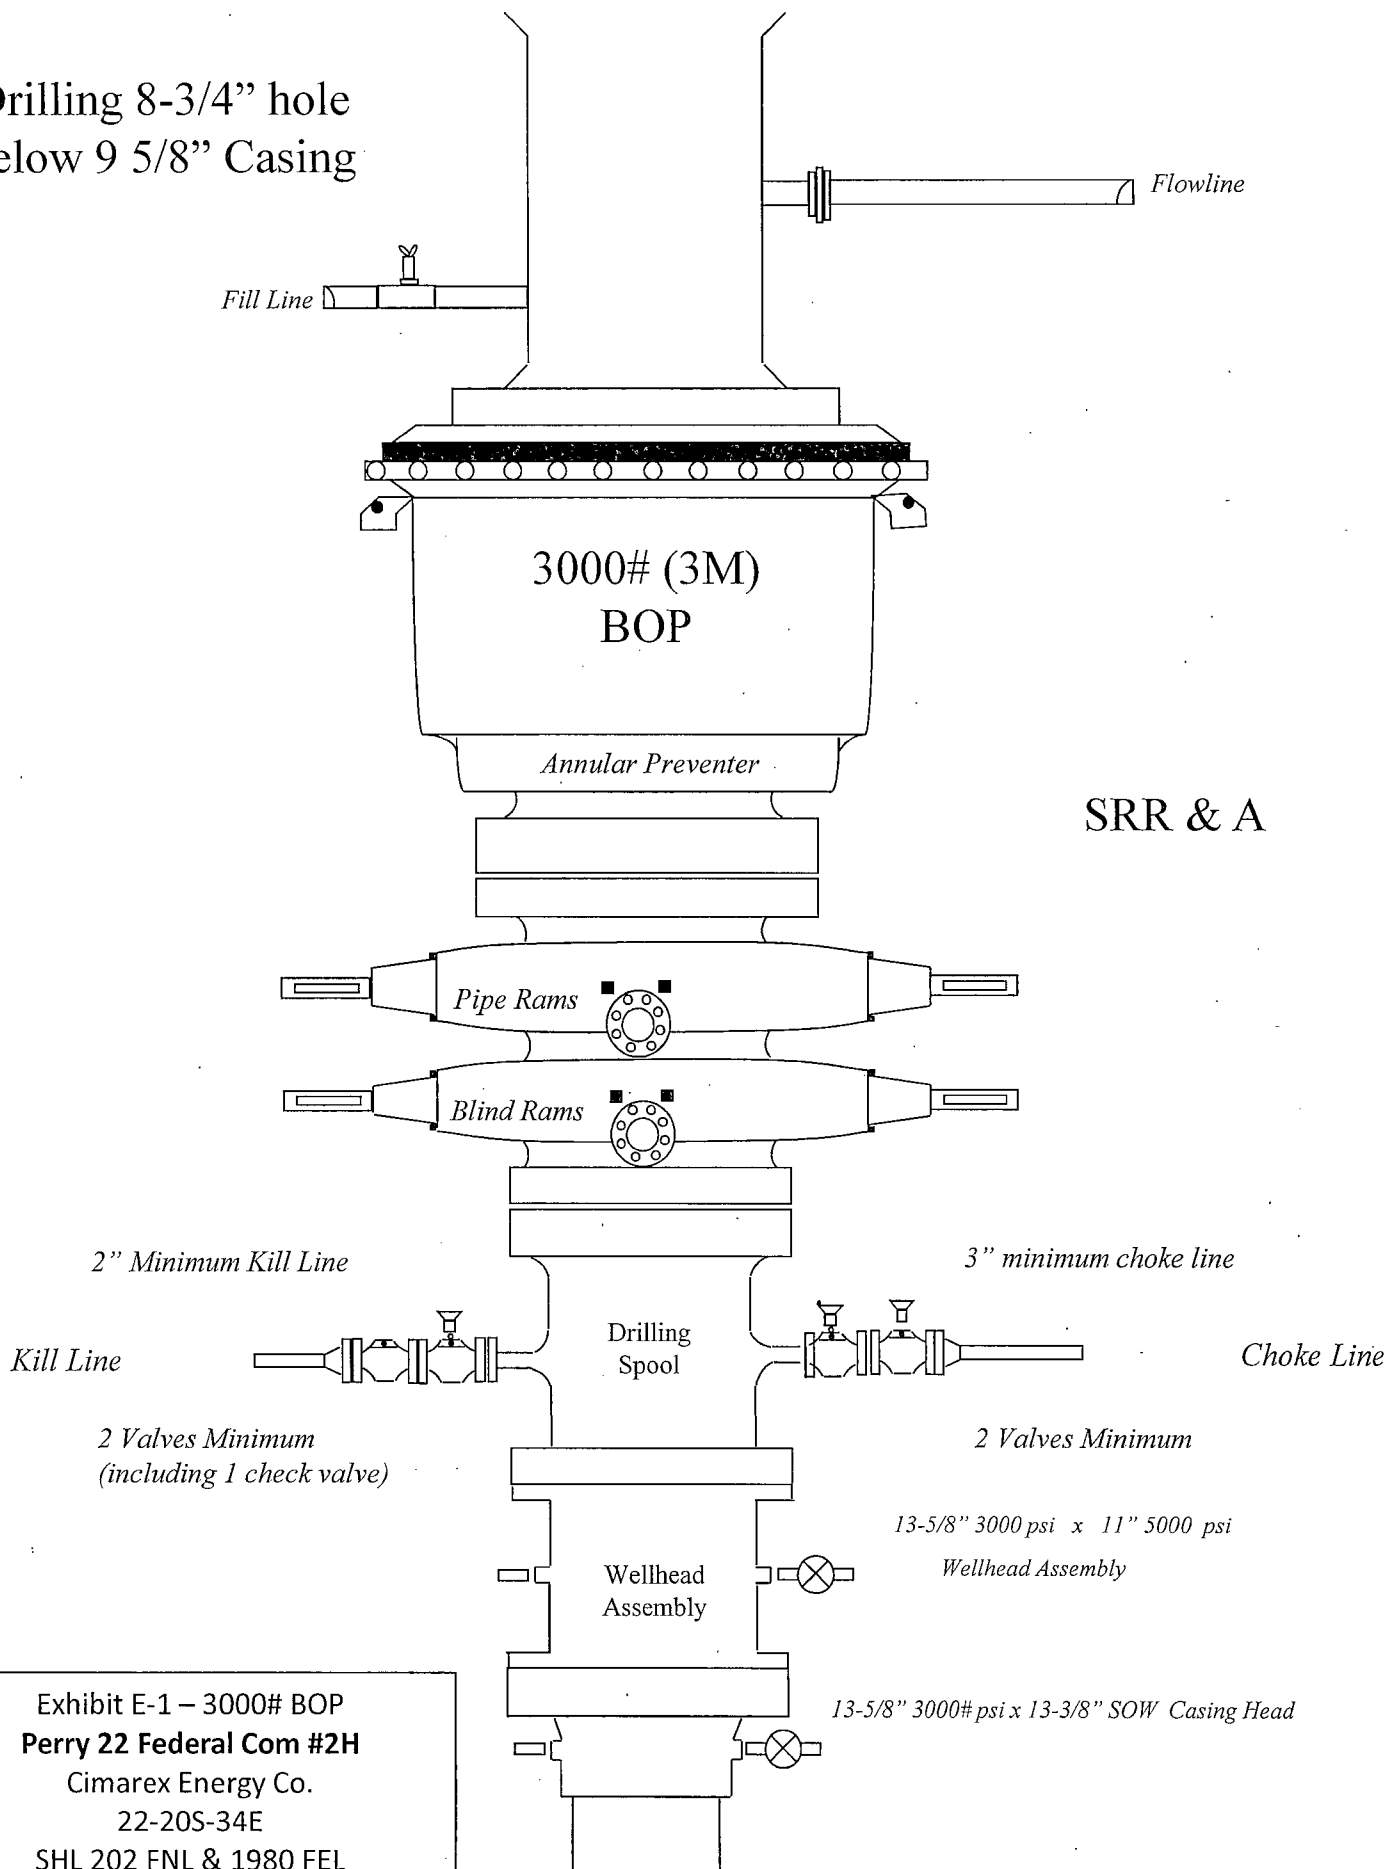

SRR & A

Exhibit E-1 – 3000# BOP
Perry 22 Federal Com #2H
Cimarex Energy Co.
22-20S-34E
SHL 202 FNL & 1980 FEL
BHL 330 FSL & 1980 FEL
Lea County, NM

Choke Line:
 2M System: 2" Minimum
 3M System: 3" Minimum
 OPTIONAL: 4" Flex Hose may be
 used if approved in APD

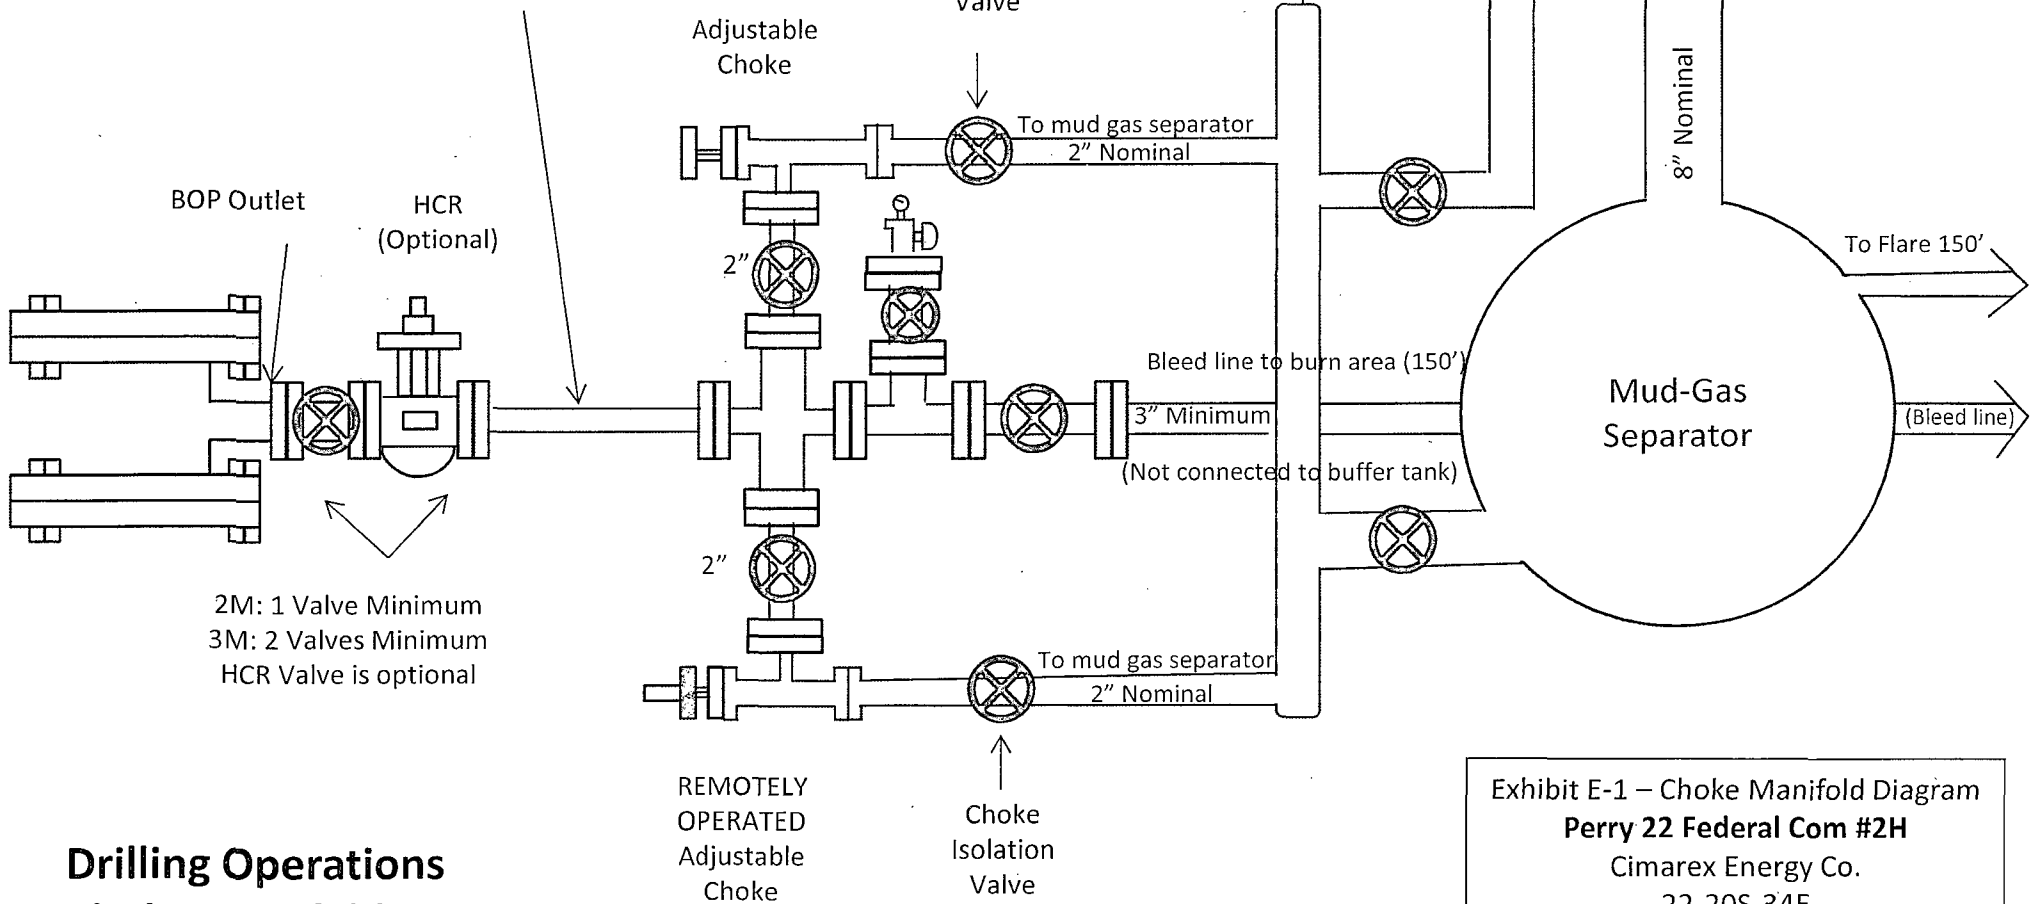

Drilling Operations Choke Manifold 2M/3M Service

Exhibit E-1 – Choke Manifold Diagram
 Perry 22 Federal Com #2H
 Cimarex Energy Co.
 22-20S-34E
 SHL 202 FNL & 1980 FEL
 BHL 330 FSL & 1980 FEL
 Lea County, NM

Exhibit F-1 – Co-Flex Hose Hydrostatic Test.

Perry 22 Federal Com #2H

Cimarex Energy Co.

22-20S-34E

SHL 202 FNL & 1980 FEL

BHL 330 FSL & 1980 FEL

Lea County, NM



Midwest Hose & Specialty, Inc.

INTERNAL HYDROSTATIC TEST REPORT		
Customer: Oderco Inc		P.O. Number: odyd-271
HOSE SPECIFICATIONS		
Type: Stainless Steel Armor Choke & Kill Hose	Hose Length: 45'ft.	
I.D. 4 INCHES	O.D. 9 INCHES	
WORKING PRESSURE 10,000 PSI	TEST PRESSURE 15,000 PSI	BURST PRESSURE 0 PSI
COUPLINGS		
Stem Part No. OKC OKC	Ferrule No. OKC OKC	
Type of Coupling: Swage-It		
PROCEDURE		
<u>Hose assembly pressure tested with water at ambient temperature.</u>		
TIME HELD AT TEST PRESSURE 15 MIN.	ACTUAL BURST PRESSURE: 0 PSI	
Hose Assembly Serial Number: 79793	Hose Serial Number: OKC	
Comments:		
Date: 3/8/2011	Tested: <i>A. James Jones</i>	Approved: <i>Kevin Hef</i>



Midwest Hose
& Specialty, Inc.

Internal Hydrostatic Test Graph

Customer: Houston

Pick Ticket #: 94260


Hose Specifications

Hose Type
C&K
I.D.
4"
Working Pressure
10000 PSI
Length
45'
O.D.
6.09"
Burst Pressure
Standard Safety Multiplier Applies

Verification

Type of Fittings
41/16 10K
Die Size
6.38"
Hose Serial #
5544
Coupling Method
Swage
Final O.D.
6.25"
Hose Assembly Serial #
79793

Pressure Test

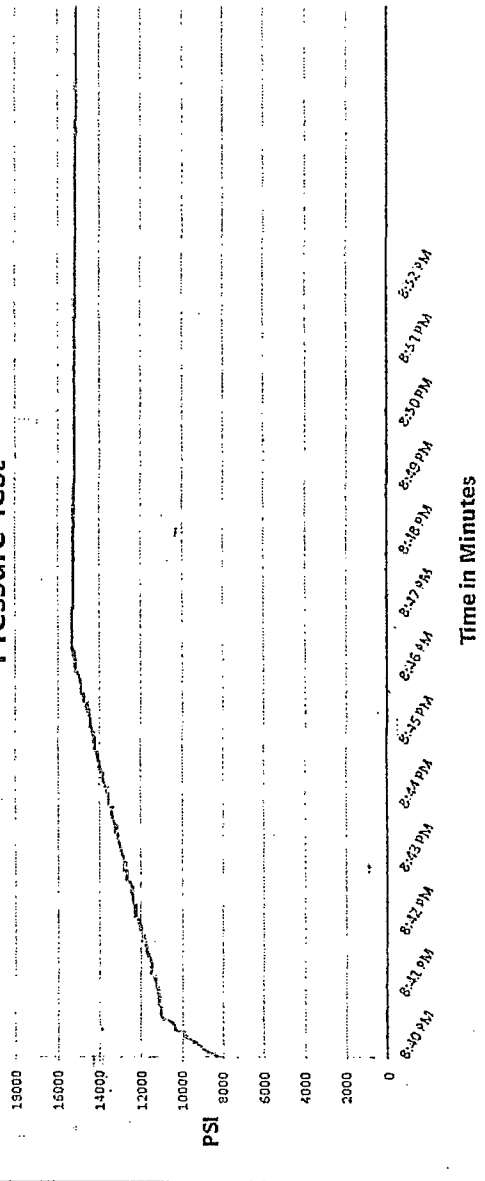

Test Pressure
15000 PSI

Time Held at Test Pressure
11 Minutes

Actual Burst Pressure

Peak Pressure
15483 PSI

Comments: Hose assembly pressure tested with water at ambient temperature.

Tested By: Zac McConnell

Approved By: Kim Thomas

[Signature]

[Signature]

March 3, 2011

Exhibit F-1 – Co-Flex Hose Hydrostatic Test
Perry 22 Federal Com #2H
Cimarex Energy Co.
22-20S-34E
SHL 202 FNL & 1980 FEL
BHL 330 FSL & 1980 FEL
Lea County, NM



Midwest Hose
& Specialty, Inc.

Exhibit F -3- Co-Flex Hose
Perry 22 Federal Com #2H
Cimarex Energy Co.
22-20S-34E
SHL 202 FNL & 1980 FEL
BHL 330 FSL & 1980 FEL
Lea County, NM

Specification Sheet Choke & Kill Hose

The Midwest Hose & Specialty Choke & Kill hose is manufactured with only premium components. The reinforcement cables, inner liner and cover are made of the highest quality material to handle the tough drilling applications of today's industry. The end connections are available with API flanges, API male threads, hubs, hammer unions or other special fittings upon request. Hose assembly is manufactured to API 7K. This assembly is wrapped with fire resistant vermiculite coated fiberglass insulation, rated at 2000 degrees with stainless steel armor cover.

Working Pressure:	5,000 or 10,000 psi working pressure
Test Pressure:	10,000 or 15,000 psi test pressure
Reinforcement:	Multiple steel cables
Cover:	Stainless Steel Armor
Inner Tube:	Petroleum resistant, Abrasion resistant
End Fitting:	API flanges, API male threads, threaded or butt weld hammer unions, unbolt and other special connections
Maximum Length:	110 Feet
ID:	2-1/2", 3", 3-1/2", 4"
Operating Temperature:	-22 deg F to +180 deg F (-30 deg C to +82 deg C)

Exhibit F-2 – Co-Flex Hose
Perry 22 Federal Com #2H
Cimarex Energy Co.
22-20S-34E
SHL 202 FNL & 1980 FEL
BHL 330 FSL & 1980 FEL
Lea County, NM



Midwest Hose & Specialty, Inc.

Certificate of Conformity

Customer:

DEM

PO

ODYD-271

SPECIFICATIONS

Sales Order

79793

Dated:

3/8/2011

We hereby certify that the material supplied
for the referenced purchase order to be true
according to the requirements of the purchase
order and current industry standards

Supplier:
Midwest Hose & Specialty, Inc.
10640 Tanner Road
Houston, Texas 77041

Comments:

Approved:

David Garcia

Date:

3/8/2011

Exhibit F – Co-Flex Hose
Perry 22 Federal Com #2H


Cimarex Energy Co.


22-20S-34E

SHL 202 FNL & 1980 FEL

BHL 330 FSL & 1980 FEL

Lea County, NM

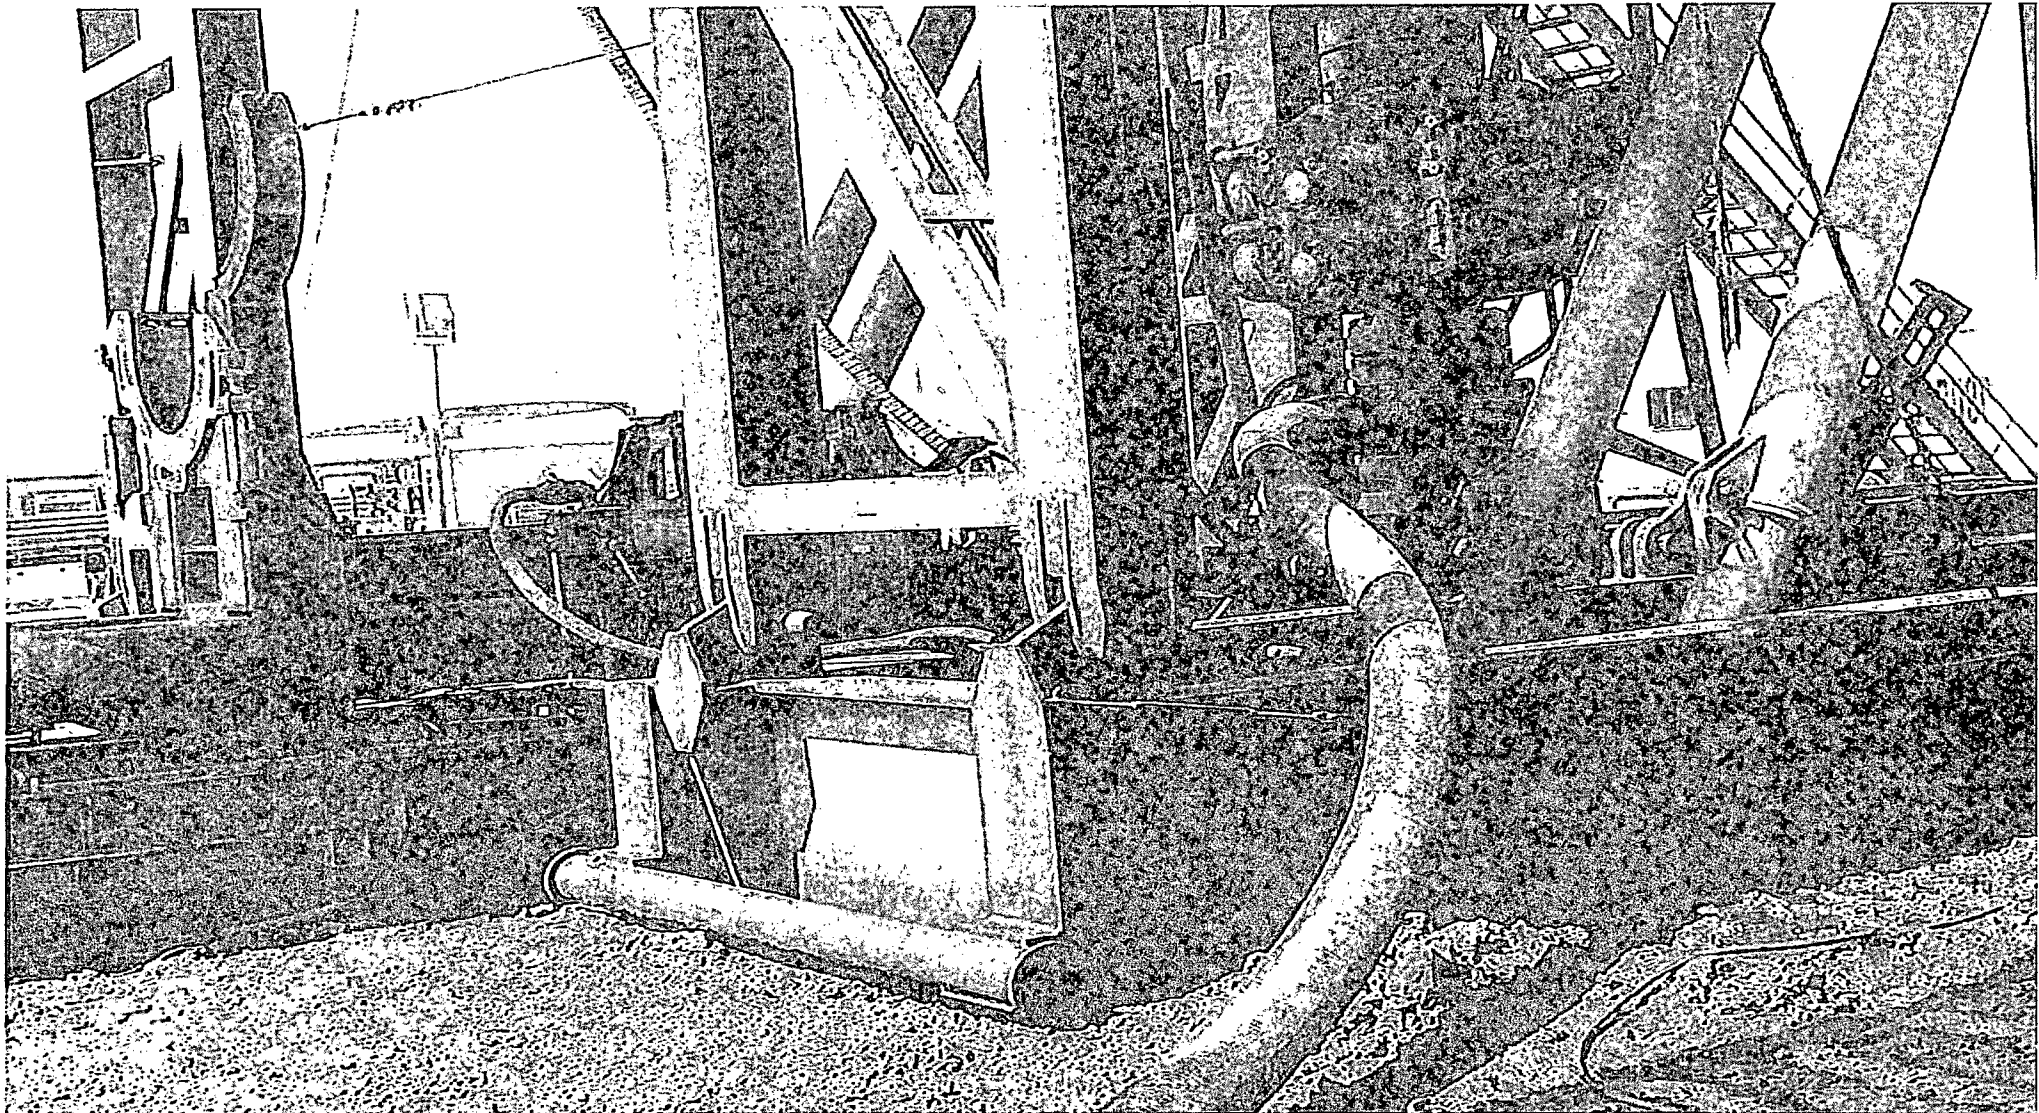

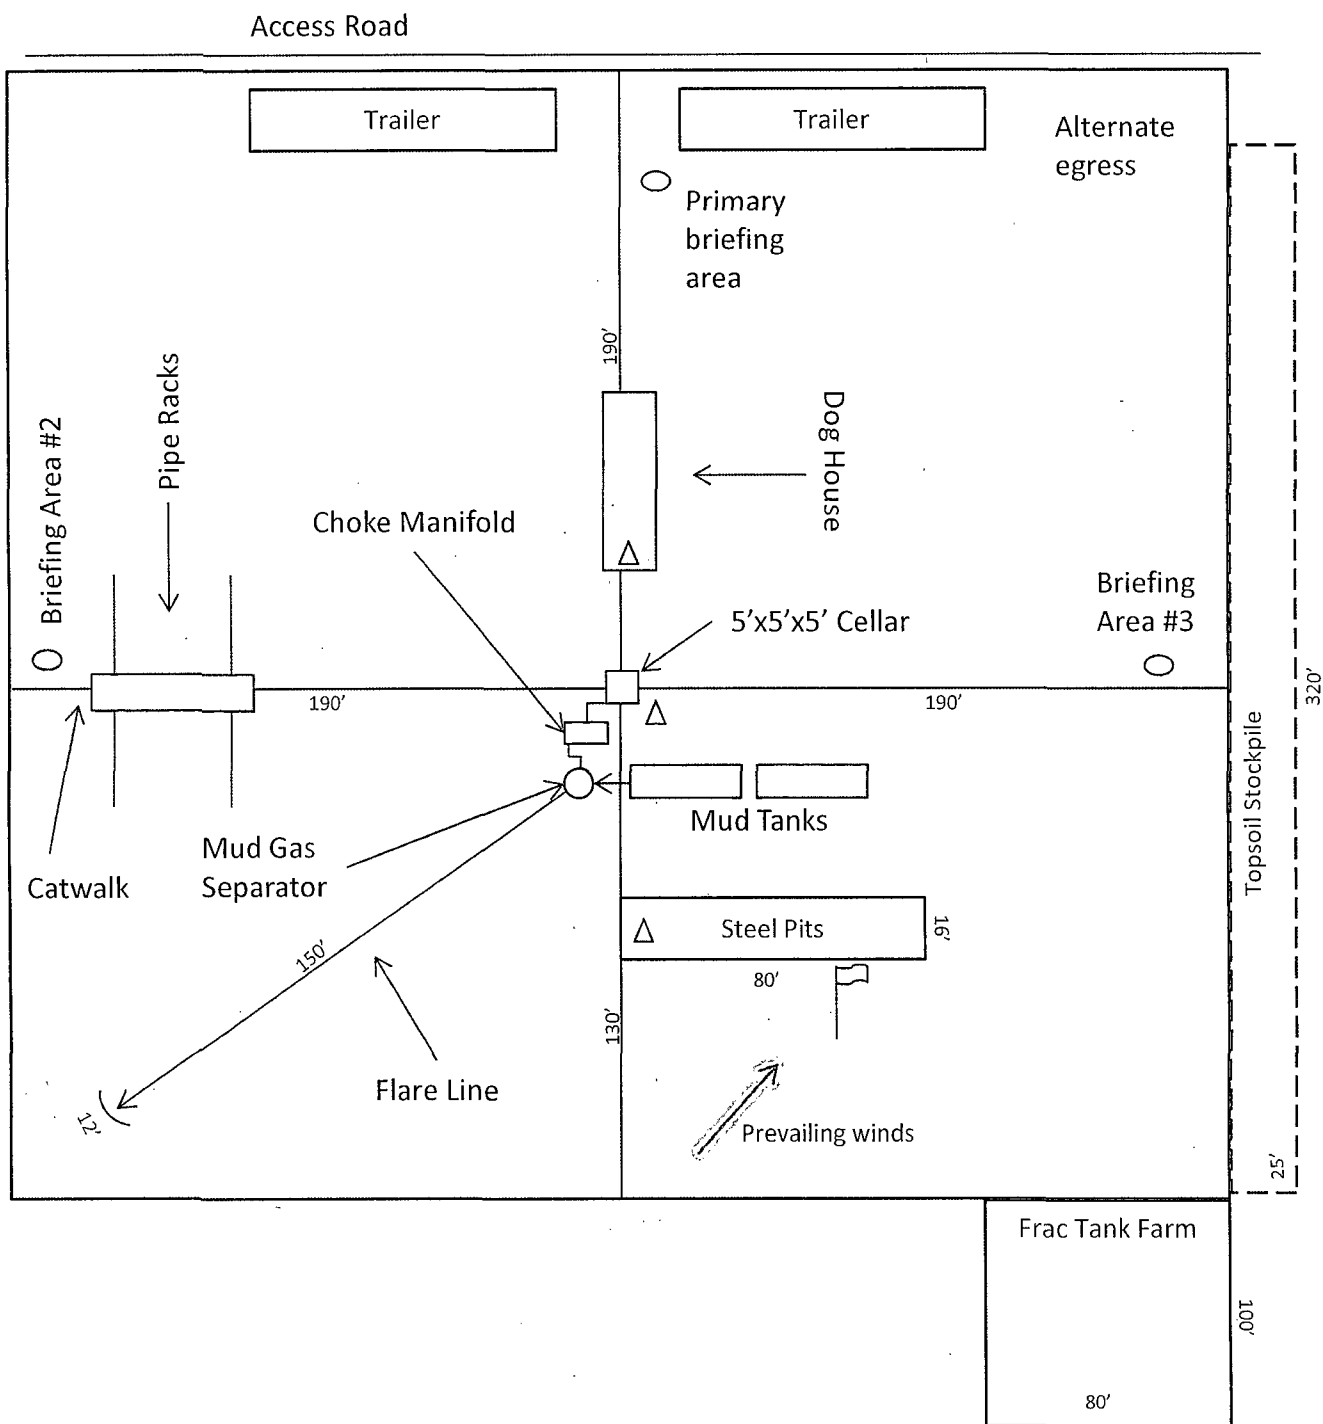

Wind Direction Indicators
(wind sock or streamers)



- H2S Monitors
(alarms at bell nipple and shale shaker)



Briefing Areas



Exhibit D – Rig Diagram
Perry 22 Federal Com #2H
 Cimarex Energy Co.
 22-20S-34E
 SHL 202 FNL & 1980 FEL
 BHL 330 FSL & 1980 FEL
 Lea County, NM