

HOBBS OCD

FEB 12 2014

RECEIVED

CVU #132 Wellbore Diagram - Current


Created:	<u>08/29/11</u>	By:	<u>PTB</u>	Well #:	<u>132</u>	St. Lse:	<u>B-1501</u>
Updated:	<u>02/03/14</u>	By:	<u>RRW</u>	API	<u>30-025-23801</u>		
Lease:	<u>Central Vacuum Unit</u>			Unit Ltr.:	<u>O</u>	Section:	<u>30</u>
Field:	<u>Central Vacuum Unit</u>			TSHP/Rng:	<u>S-17 E-35</u>		
Surf. Loc.:	<u>475' FSL & 1650' FEL</u>			Unit Ltr.:		Section:	
Bot. Loc.:				TSHP/Rng:			
County:	<u>Lea</u>	St.:	<u>NM</u>	Directions:	<u>Buckeye, NM</u>		
Status:	<u>Active Oil Well</u>			Chevno:	<u>FG8654</u>		

Surface Casing
 Size: 8 5/8"
 Wt., Grd.: 24#
 Depth: 397'
 Sxs Cmt: 350
 Circulate: 75 sx
 TOC: Surface
 Hole Size: 12 1/4"

Top fill casing with cmt to surf (19 bbis)

KB: 3,989
 DF: _____
 GL: 3,980
 Ini. Spud: 06/28/71
 Ini. Comp.: 07/10/71
 P&A Date: 01/26/14

Production Casing
 Size: 4 1/2"
 Wt., Grd.: 11.6#
 Depth: 4750'
 Sxs Cmt: 275 Top of tubing @ 498'
 Circulate: No with ESP cable
 TOC: 2650' TS
 Hole Size: 7 7/8" Tubing cut at 551'

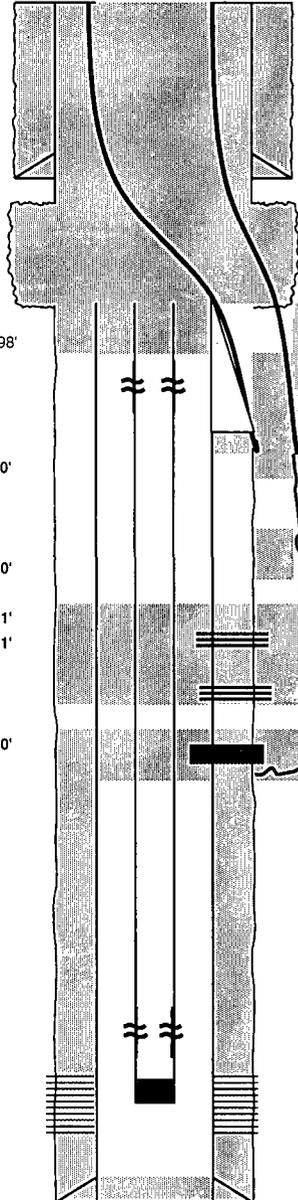

7 7/8" hole under reamed to 12 1/4" 408' to 495'

Top of 4-1/2" csg @ 498'

Cemented in 7" casing @ 589' w/ 300 sxs, cement to surf

7 7/8" Sidetrack to 628'

Intercept Well @ 1,300'

Intercept Well @ 1,549' & Perf into Well 1,546-54' 4.5" TCP, 5 SPF

Intercept Well @ 1,620' & Perf into Well 1,631-39' 4.5" TCP, 5 SPF

Perf into Well @ 2,779' 4.5" TCP, 5 SPF

6 1/8" Sidetrack to 2,850'

2-3/8" Production Tubing
Tubing cut at 4300'

ESP: 4335' - 4408' (Stuck in hole)

Perfs 4454-4724'

Pump 23 sx cmt from 520 - 750'

Pump 23 sx cmt from 1,250 - 1,350'

Pump 23 sx cmt from 1,481 - 1,631'

Pump 10 sx cmt & tag @ 1,631'

Pump 50 sx cmt & tag @ 2,750'

PBTD: 4,730
 TD: 4,750

FEB 12 2014