

Office

Energy, Minerals and Natural Resources

Revised August 1, 2011

District I - (575) 393-6161

1625 N. French Dr., Hobbs, NM 88240

District II - (575) 748-1283

811 S. First St., Artesia, NM 88210

District III - (505) 334-6178

1000 Rio Brazos Rd., Aztec, NM 87410

District IV - (505) 476-3460

1220 S. St. Francis Dr., Santa Fe, NM

87505

HOBBS OGD

FEB 18 2014

RECEIVED

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.

Santa Fe, NM 87505

WELL API NO.

30-025-27589

5. Indicate Type of Lease

STATE ☐ FEE ☒

6. State Oil & Gas Lease No.

7. Lease Name or Unit Agreement Name

Filbert

8. Well Number: 1

9. OGRID Number:

4323

10. Pool name or Wildcat

Nadine West

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ~~Water Injection~~

2. Name of Operator

Chevron U.S.A. INC.

3. Address of Operator

15 Smith Road Midland, TX 79705

4. Well Location

Unit Letter J : 2310' feet from the South line and 1650' feet from the East lineSection 8 Township 20-S Range 38-E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

3562' GL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒TEMPORARILY ABANDON ☐ CHANGE PLANS ☐PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐DOWNHOLE COMMINGLE ☐OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐COMMENCE DRILLING OPNS. ☐ P AND A ☐CASING/CEMENT JOB ☐OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-7150' PB-6680' PERFS: 5861' - 5942', 6005' - 6126', 6193' - 6483', 6924' - 6970'

CIBP @ 6700' capped w/20' cmt

8-5/8" 24# @ 1500' w/750 sks of Class C cement, 12-1/4" hole, TOC, Surface, by Circulation

5-1/2" 15.5# & 17# @ 7150' w/600 sks of cement, 7-7/8" hole, TOC, 3600' by TS

1. MIRUWSU. NDWH. NUBOPE.

2. Set CIBP @ 5761' w/25 sks of C cement.

3. Pressure Test casing to 500 psi and record/report findings.

4. Set Plug @ 4250' - 4050' w/30 sks CTOC. (San Andres)

5. P&S w/60 sks of C cement @ 2750' - 2550' CTOC. WOC & TAG, (Bottom of Salt) @ 1550'

6. P&S w/80 sks of C cement @ 1720' - 1400' CTOC. WOC & TAG, (Top of Salt & Shoe)

7. Perf & Circulate w/175sx of C cement 350' - Surface.

8. Cut off wellhead and anchors 3' below grade. Weld on dry hole marker. Clean location.

9. CLOSED LOOP SYSTEM USED.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Representative DATE 02/13/2014Type or print name Robert Holden E-mail address: rholden@keyenergy.com PHONE: 432-523-5155

For State Use Only

APPROVED BY: [Signature] TITLE Compliance Officer DATE 2/19/2014

Conditions of Approval (if any):

FEB 20 2014

OIL CONSERVATION DIVISION - Hobbs office Must Be Notified
24 hours prior to the beginning of Plugging Operations.

Well: **Filbert #1**Field: **Nadine West**

Reservoir:

Location:

GPS: 32.58665 -103.16681
 2310' FSL & 1650' FEL
 Unit Letter: J
 Section: 8
 Township: 20S Range: 38E
 County: Lea State: NM

Elevations:

GL: 3,562'
 KB: 3,571'
 DF:

Wellbore Diagram*Current***Well ID Info:**

Chevno: AN0245
 API No: 30-025-27589
 Spud Date: 10/26/1981
 Drill End Date: 11/11/1981

Tubing Detail: (11/17/2009)

#Jts:	Size:	Footage
	KB Correction	0.00
116	Jts. 2-3/8" 4.7# J-55 Tbg	0.00
	TAC	0.00
5	Jts. 2-3/8" 4.7# J-55 Tbg	0.00
	SN @ 5965'	0.00
	2-3/8" X 4" Perforated Sub	4.00
	Jt. 2-3/8" Bull plug MA	0.00

121 Bottom Of String >> 4.00

Rod Detail: (11/18/2009)

#Rods:	Size:	Footage
	unknown length Polished Rod	0.00
107	7/8" X 25' KD Rods	2675.00
120	3/4" X 25' KD Rods	3000.00
9	7/8" X 25' KD Rods	225.00
	20-150-RHBC-16 Rod Pump	16.00

236 Total Length >> 5916.00

PBTD: 6,680'
 TD: 7,150'

Updated: 1/17/2014

Surface Csg: 8-5/8" 24# J-55
 Set: @ 1500' w/ 750 sx cmt
 Hole Size: 12-1/4"
 Circ: Yes TOC: Surface
 TOC By: Circulation

TOC @ 3600'
 (Temperature Survey)

Perfs
 5861 - 5942 *Blinebry*
 6005 - 6126 *Blinebry*
 6193 - 6483 *Blinebry*
 6924 - 6970 *Drinkard*

TOC @ 6680'
 CIBP @ 6700'
 capped w/20' cmt

Production Csg: 5-1/2" 15.5 & 17#
 Set: @ 7150' w/ 600 sx cmt
 Hole Size: 7-7/8"
 Circ: No TOC: 3600'
 TOC By: Temp Survey

By: Bob Hall

Well: **Filbert #1**Field: **Nadine West**

Reservoir:

Location:
 GPS: 32.58665 -103.16681
 2310' FSL & 1650' FEL
 Unit Letter: J
 Section: 8
 Township: 20S Range: 38E
 County: Lea State: NM

Elevations:
 GL: 3,562'
 KB: 3,571'
 DF:

Wellbore Diagram*Proposed***Well ID Info:**

Chevno: AN0245
 API No: 30-025-27589
 Spud Date: 10/26/1981
 Drill End Date: 11/11/1981

Tubing Detail: (11/17/2009)

#Jts:	Size:	Footage
	KB Correction	0.00
116	Jts. 2-3/8" 4.7# J-55 Tbg	0.00
	TAC	0.00
5	Jts. 2-3/8" 4.7# J-55 Tbg	0.00
	SN @ 5965'	0.00
	2-3/8" X 4' Perforated Sub	4.00
	Jt. 2-3/8" Bull plug MA	0.00

121 Bottom Of String >> 4.00


Rod Detail: (11/18/2009)

#Rods:	Size:	Footage
	unknown length Polished Rod	0.00
107	7/8" X 25' KD Rods	2675.00
120	3/4" X 25' KD Rods	3000.00
9	7/8" X 25' KD Rods	225.00
	20-150-RHBC-16 Rod Pump	16.00

236 Total Length >> 5916.00

PBTD: 6,680'
 TD: 7,150'

Updated: 1/17/2014

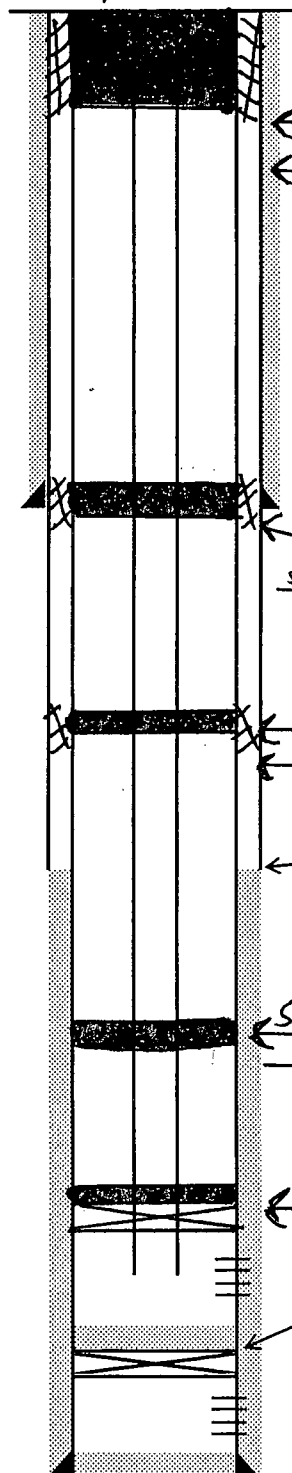

Surface Csg: 8-5/8" 24# J-55

Set: @ 1500' w/ 750 sx cmt

Hole Size: 12-1/4"

Circ: Yes TOC: Surface

TOC By: Circulation

Perf + Sqz @ 1720' - 1400' w/80
 sks of cmt (Top of Salt + SHOE)

Perf + Sqz @ 2750' - 2550' w/60 sks
 woc + TAB (Bottom of Salt)

TOC @ 3600'
 (Temperature Survey)

Set Plug @ 4250' - 4050' w/30 sks of cmt
 (San Andres)

Perfs

5861 - 5942 Blinebry

6005 - 6126 Blinebry

6193 - 6483 Blinebry

6924 - 6970 Drinkard

Set CIBP @ 5761

w/25 sks

TOC @ 6680'
 CIBP @ 6700'
 capped w/20' cmt

Production Csg: 5-1/2" 15.5 & 17#

Set: @ 7150' w/ 600 sx cmt

Hole Size: 7-7/8"

Circ: No TOC: 3600'

TOC By: Temp Survey

By: Bob Hall