

Submit 1 Copy To Appropriate District Office

District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

HOBBS OGD

State of New Mexico
Energy, Minerals and Natural Resources

MAY 19 2014

RECEIVED

CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103

Revised August 1, 2011

WELL API NO. 30-025-03836
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name Lovington San Andres Unit
8. Well Number: 30
9. OGRID Number: 241333
10. Pool name or Wildcat Lovington Grayburg San Andres
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3846' DL

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☒ Other Water Injection

2. Name of Operator:
Chevron Midcontinent, L.P.

3. Address of Operator
15 Smith Road Midland, TX 79705

4. Well Location
Unit Letter D : 660 feet from the North line and 660 feet from the WEST line
Section 1 Township 17-S Range 36-E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3846' DL

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐
OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐
OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-5070' PBTD Perfs 4543' - 5035' Baker 5-1/2" Packer @ 4456'
13" 50# csg @ 256' w/200 sks, 17-1/2" hole, TOC: Surface
8-5/8" 28#csg @ 3129' w/500, 12" hole, Surface
5-1/2" 17# csg @ 4543' w/300 sks, 7-7/8" hole, TOC: Surface

1. MIRUWSU. NDWH. NUBOP.
2. Try and Remove Packer (Brand unknown)
3. Set CIBP @ 4443' w/25 sks of C cement.
4. Circulate well with 9.5 PPG plugging mud. Pressure Test casing to 500 psi and record/report findings.
5. Set Plug w/30 sks of C cement @ 3229' - 3029', CTOC: (Shoe) **WOC & TAG**
6. Set Plug w/ 30 sks of C cement @ 2998' - 2798', CTOC: WOC & TAG (Bottom of Salt)
7. Set Plug w/ 30 sks of C cement @ 2227' - 2027', CTOC: WOC & TAG (Top of Salt)
8. Perf & Circulate & Verify 175 sks of C cement @ 356' to Surface.
9. Cut off wellhead and anchors 3' below grade. Weld oil dry hole marker. Clean location.
10. CLOSED LOOP SYSTEM USED.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Representative DATE 05/19/2014

Type or print name Robert Holden E-mail address: rholden@keyenergy.com PHONE: 432-523-5155

For State Use Only

APPROVED BY: [Signature] TITLE Dist. Supervisor DATE 5/19/2014

MAY 19 2014

CURRENT
WELLBORE DIAGRAM

~~30~~
LSAU 30

Created: _____
Updated: 1/6/2014
Lease: Lovington-San Andres
Surf Location: _____
BH Location: _____
County: Lea
Current Status: Shut-In Injection Well
State: NM


By: _____
By: dyuy
KB: 13'
RF: 3846'
GL: 3833'

Field: Lovington
Well No.: 30
Twp/Rng: 17-S/36-E
Unit Ltr: _____
API: 30-025-03836
Original Spud Date: 10/15/1939
Original Compl. Date: 12/2/1939
Formation: San Andres

Surface Csg.
Size: 13" 8-V
Wt.: 50 #
Set @: 256'
Sxs. Cmt.: 200
Circ: Surface
TOC: _____
Hole Size: 17-1/2"

Intermediate Csg.
Size: 8-5/8" 8-R&V ✓
Wt.: 28 #
Set @: 3129'
Sxs. Cmt.: 500
Circ: Surface
TOC: _____
Hole Size: 12"

Production Csg.
Size: 5-1/2" 8-R
Wt.: 17 #
Set @: 4543'
Sxs. Cmt.: 300
Circ: Surface
TOC: _____
Hole Size: 7-7/8"

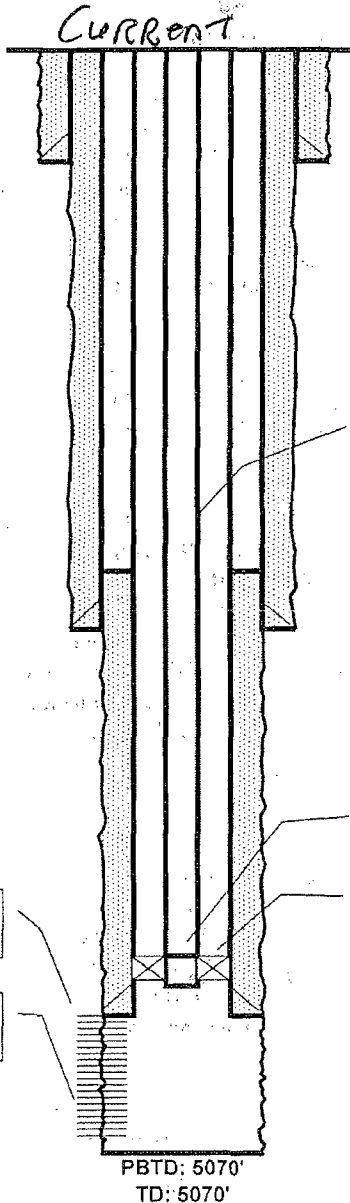

- 12/2/193
- 2/13/195
15%
- 3/30/196
15%
- 3/18/196
Injection
- 3/30/199
O.H. 4641
Acidized
acid and
- 8/16/199
xylene &

4425.34' (138 Jts.) of 2-3/8" 5.13 # J-55 Tubing

4-1/2" On-Off Tool
4426' - 4428'

5-1/2" Baker AD-1 Packer on 2-3/8" J-55 @ 4456'

PKR @ 4448'

OPEN HOLE →

Perforated Interval:
4543' - 4970'

Perforated Interval:
4641' - 5035'

PBTD: 5070'
TD: 5070'

**CURRENT
WELLBORE DIAGRAM**

LSAU 30

Created:	1/6/2014	By:	dyuy	Field:	Lovington
Updated:	Lovington San Andres	By:		Well No.:	30
Lease:	Andres			Twp/Rng:	17-S/36-E
Surf Location:				Unit Ltr:	
BH Location:				API:	30-025-03836
County:	Lea	KB:	13'	Original Spud Date:	10/15/1939
Current Status:	Shut-In Injection Well	RF:	3846'	Original Compl. Date:	12/2/1939
State:	NM	GL:	3833'	Formation:	San Andres

Surface Csg.

Size:	13" 8-V
Wt.:	50 #
Set @:	256'
Sxs. Cmt.:	200
Circ:	Surface
TOC:	
Hole Size:	17-1/2"

Intermediate Csg.

Size:	8-5/8" 8-R&V
Wt.:	28 #
Set @:	3129'
Sxs. Cmt.:	500
Circ:	Surface
TOC:	
Hole Size:	12"

Production Csg.

Size:	5-1/2" 8-R
Wt.:	17 #
Set @:	4543'
Sxs. Cmt.:	300
Circ:	Surface
TOC:	
Hole Size:	7-7/8"

