

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (505) 393-0161 Fax: (505) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (505) 768-1232 Fax: (505) 749-0720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6128 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

1. API Number 30-025-41500		2. Pool Code 06660		3. Pool Name Blinebry	
4. Property Code 310134		5. Property Name STATE BD 36			6. Well Number 3
7. OGRID No. 13837		8. Operator Name MACK ENERGY CORPORATION			9. Elevation 3303.8

10. Surface Location								
11. L or lot no. J	Section 36	Township 22 S	Range 37 E	Lot Idn. 2250	North/South line SOUTH	Feet from the 1590	East/West line EAST	County LEA

11. Bottom Hole Location If Different From Surface								
12. L or lot no. J	Section 36	Township 22 S	Range 37 E	Lot Idn. 2309	North/South line SOUTH	Feet from the 1657	East/West line EAST	County LEA

13. Dedicated Acres 40	14. Joint or Infill	15. Consolidation Code	16. Order No.
----------------------------------	---------------------	------------------------	---------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

N89°41'34"E 2640.44 FT NW CORNER SEC. 36 LAT. = 32.3556277°N LONG. = 103.1247569°W NMSP EAST N = 495199.69 E = 873211.06		N89°41'34"E 2640.44 FT N/4 CORNER SEC. 36 SCALED		NE CORNER SEC. 36 LAT. = 32.3555414°N LONG. = 103.1076594°W NMSP EAST N = 495228.32 E = 878491.38	
100°44'47"W 2659.28 FT		NOTE: LATITUDE AND LONGITUDE COORDINATES ARE SHOWN USING THE NORTH AMERICAN DATUM OF 1927 (NAD27). NEW MEXICO STATE PLANE EAST COORDINATES ARE SHOWN IN NAD27 DATUM.		100°44'34"E 2639.42 FT	
W/4 CORNER SEC. 36 SCALED		STATE BD 36 #3 ELEV. = 3303.8' LAT. = 32.3472097°N (NAD27) LONG. = 103.1127825°W NMSP EAST (NAD 27) N = 492179.04 E = 876940.72		E/4 CORNER SEC. 36 SCALED	
100°44'47"W 2659.28 FT		BOTTOM OF HOLE LAT. = 32.3473056°N LONG. = 103.1130672°W NMSP EAST N = 492212.98 E = 876855.48		1590'	
SW CORNER SEC. 36 LAT. = 32.3410112°N LONG. = 103.1247270°W NMSP EAST N = 489882.14 E = 873280.19		S/4 CORNER SEC. 36 LAT. = 32.3410205°N LONG. = 103.1181790°W NMSP EAST N = 489915.44 E = 875920.40		SE CORNER SEC. 36 LAT. = 32.3410341°N LONG. = 103.1076340°W NMSP EAST N = 489950.47 E = 878559.64	
S89°16'51"W 2640.66 FT		2250'		S89°14'35"W 2639.72 FT	

12. OPERATOR CERTIFICATION
I hereby certify that the information contained herein is true and complete in the best of my knowledge and belief, and that this organization either owns a working interest or mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or in a voluntary pooling agreement or a compulsory pooling order hereinafter entered by the division.

Deana Weaver 11.4.14
Signature Date
Deana Weaver
Printed Name
dweaver@mec.com
E-mail Address

13. SURVEYOR CERTIFICATION
I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.

NOVEMBER 19, 2013
Date of Survey

Joseph L. Campbell
Signature and Seal of Professional Surveyor
Certificate Number 011000101 KRAMBLO, PLS 12797
SURVEY NO. 2305A

Jim

NOV 05 2014

Mack Energy Corporation


Exhibit #2

MINIMUM CHOKES MANIFOLD

3,000, 5,000, and 10,000 PSI Working Pressure

3M will be used

3 MWP - 5 MWP - 10 MWP

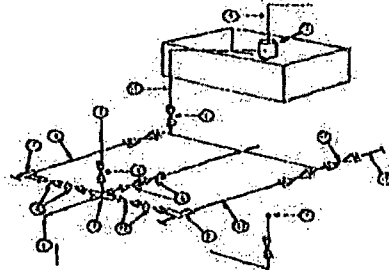

Mud Pit

Reserve Pit

* Location of separator optional

Below Substructure

Minimum requirements

No.		3,000 MWP			5,000 MWP			10,000 MWP		
		I.D.	Nominal	Rating	I.D.	Nominal	Rating	I.D.	Nominal	Rating
1	Line from drilling Spool		3"	3,000		3"	5,000		3"	10,000
2	Cross 3" x 3" x 3" x 2"			3,000			5,000			
3	Valve Gate Plug	3 1/8"		3,000	3 1/8"		5,000	3 1/8"		10,000
4	Valve Gate Plug	1 13/16"		3,000	1 13/16"		5,000	1 13/16"		10,000
5	Valves (1)	2 1/16"		3,000	2 1/16"		5,000	2 1/16"		10,000
6	Pressure Gauge			3,000			5,000			10,000
7	Valve Gate Plug	3 1/8"		3,000	3 1/8"		5,000	3 1/8"		10,000
8	Adjustable Choke (3)	2"		3,000	2"		5,000	2"		10,000
9	Adjustable Choke	1"		3,000	1"		5,000	2"		10,000
10	Line		3"	3,000		3"	5,000		3"	10,000
11	Line		2"	3,000		2"	5,000		2"	10,000
12	Valve Gate Plug	3 1/8"		3,000	3 1/8"		5,000	3 1/8"		10,000
13	Line		3"	1,000		3"	1,000		3"	2,000
14	Line		3"	1,000		3"	1,000		3"	2,000
15	Remote reading compound Standpipe pressure gauge			3,000			5,000			10,000
16	Gas Separator		2' x 5'			2' x 5'			2' x 5'	
17	Line		4"	1,000		4"	1,000		4"	2,000
18	Valve Gate Plug	3 1/8"		3,000	3 1/8"		5,000	3 1/8"		10,000

(1) Only one required in Class 3M

(2) Gate valves only shall be used for Class 10 M

(3) Remote operated hydraulic choke required on 5,000 psi and 10,000 psi for drilling.


EQUIPMENT SPECIFICATIONS AND INSTALLATION INSTRUCTION

- All connections in choke manifold shall be welded, studded, flanged or Cameron clamp of comparable rating.
- All flanges shall be API 6B or 6BX and flange gaskets shall be API RX or BX. Use only BX for 10 MWP.
- All lines shall be securely anchored.
- Chokes shall be equipped with tungsten carbide seats and needles, and replacements shall be available.
- Alternate with automatic chokes, a choke manifold pressure gauge shall be located on the rig floor in conjunction with the standpipe pressure gauge.
- Line from drilling spool to choke manifold should be as straight as possible. Lines downstream from chokes shall make turns by large bends or 90 degree bends using ball-plugged tees.

Mack Energy Corporation
Minimum Blowout Preventer Requirements
 3000 psi Working Pressure
 13 3/8 inch - 3 MWV
 11 Inch - 3 MWV
EXHIBIT #1

Stack Requirements

NO.	Items	Min. I.D.	Min. Nominal
1	Flowline		2"
2	Fill up line		2"
3	Drilling nipple		
4	Annular preventer		
5	Two single or one dual hydraulically operated rams		
6a	Drilling spool with 2" min. kill line and 3" min. choke line outlets		2" Choke
6b	2" min. kill line and 3" min. choke line outlets in line. (Alternate to 6a above)		
7	Valve Gate Plug	3 1/8"	
8	Gate valve power operated	3 1/8"	
9	Line to choke manifold		3"
10	Valve Gate Plug	2 1/16"	
11	Check valve	2 1/16"	
12	Casing head		
13	Valve Gate Plug	1 13/16"	
14	Pressure gauge with needle valve		
15	Kill line to rig mud pump manifold		2"

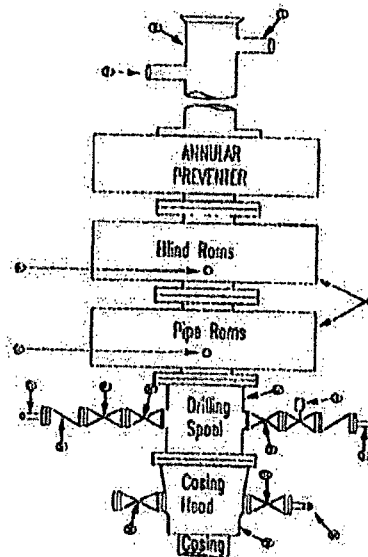

OPTIONAL

16	Plugged Valve	1 13/16"
----	---------------	----------

CONTRACTOR'S OPTION TO FURNISH:

- All equipment and connections above blindhead or casinghead. Working pressure of preventers to be 2000 psi minimum.
- Automatic accumulator (80 gallons minimum) capable of closing BOP in 30 seconds or less and holding them closed against full rated working pressure.
- BOP controls to be located near driller's position.
- Kelly equipped with Kelly cock.
- Inside blowout preventer or its equivalent on derrick floor at all times with proper threads to fit pipe being used.
- Kelly saver-sub equipped with rubber casing protector at all times.
- Plug type blowout preventer tester.
- Extra set pipe nuts to fit drill pipe in use on location at all times.
- Type RX ring gaskets in place of Type R.

MEC TO FURNISH:

- Blindhead or casing head and side valves.
- Wear bushing, if required.

10.

ME

GENERAL NOTES:

- Deviations from this drawing may be made only with the express permission of MEC's Drilling Manager.
- All connections, valves, fittings, piping, etc., subject to well or pump pressure must be flanged (suitable clamp connections acceptable) and have minimum working pressure equal to rated working pressure of preventers up through choke valves must be full opening and suitable for high pressure mud service.
- Controls to be of standard design and each marked, showing opening and closing position.
- Chokes will be positioned so as not to hamper or delay changing of choke heads.

Replaceable parts for adjustable choke, or bean sizes, rotators, and choke wrenches to be conveniently located for immediate use.

- All valves to be equipped with handwheels or handles ready for immediate use.
- Choke lines must be suitably anchored.
- Handwheels and extensions to be connected and ready for use.
- Valves adjacent to drilling spool to be kept open. Use outside valves except for emergency.
- All seamless steel control piping (2000 psi working pressure) to have flexible joints to avoid stress. Hoses will be permitted.
- Casinghead connections shall not be used except in case of emergency.
- Does not use kill line for routine fill up operations.