

Submit 1 Copy To Appropriate District Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-025-06016
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. 14896
7. Lease Name or Unit Agreement Name Bertie Whitwire
8. Well Number 6
9. OGRID Number 16696
10. Pool name or Wildcat Monument Abo, SE
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3555'

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well Other

2. Name of Operator
OXY USA Inc.

3. Address of Operator
P.O. Box 50250 Midland, TX 79710

4. Well Location
 Unit Letter B : 990 feet from the North line and 2310 feet from the east line
 Section 8 Township 20S Range 37E NMPM County Lea

NOV 14 2014
 RECEIVED
 HOBBS OCD

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input checked="" type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL. <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
DOWNHOLE COMMINGLE <input type="checkbox"/>			
CLOSED-LOOP SYSTEM <input type="checkbox"/>			
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Wells, Attach a separate diagram of proposed completion or recompletion.

**Condition of Approval: notify
 OCD Hobbs office 24 hours
 prior of running MIT Test & Chart**

TD-7500' PBTD-7418' Perfs-7097-7273'

OXY USA Inc. respectfully requests to temporarily abandon this well. It is currently being evaluated for possible future recompletion.

1. RIH & set CIBP @ +/-7047'
2. Notify NMOCD of casing integrity test 24hrs in advance.
3. RU pump truck, circulate well with treated water, pressure test casing to 500# for 30 min.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.


SIGNATURE David Stewart TITLE Sr. Regulatory Advisor DATE 11/6/14

Type or print name David Stewart E-mail address: david_stewart@oxy.com PHONE: 432-685-5717

For State Use Only
 APPROVED BY: Mary Brown TITLE Dist. Supervisor DATE 11/17/2014
 Conditions of Approval (if any)

NOV 18 2014

OXY USA Inc. - Proposed
Bertie Whitmore #6
API No. 30-025-06016

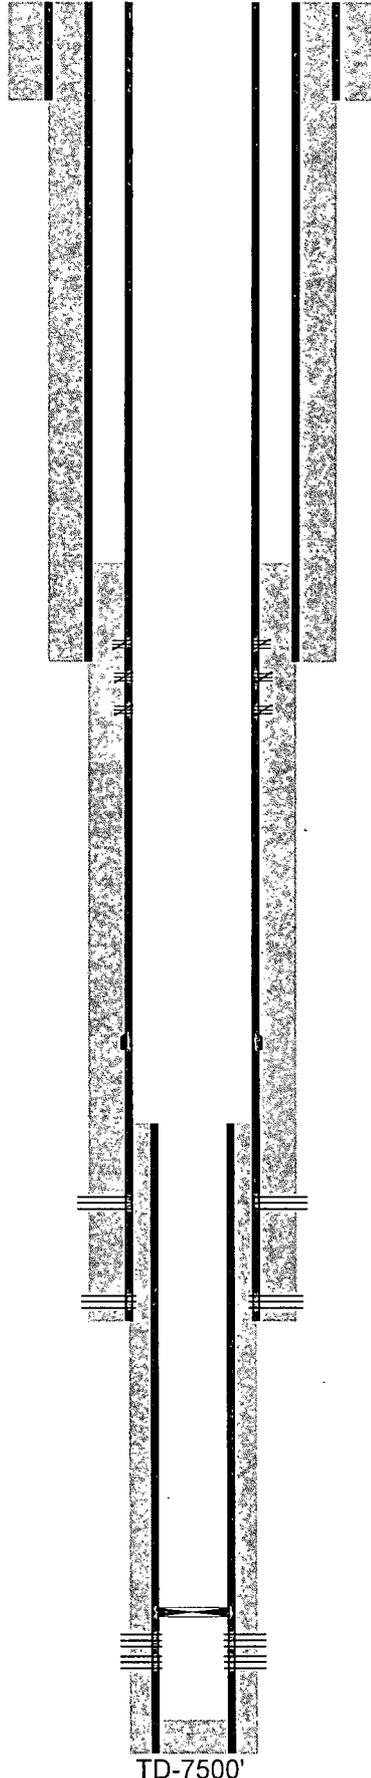

17-1/2" hole @ 469'
13-3/8" csg @ 469'
w/ 475sx-TOC-Surf-Circ

12-1/4" hole @ 2900'
9-5/8" csg @ 2900'
w/ 1700sx-TOC-Surf-Circ

1995-Sqz perfs @ 2825' w/ 300sx
1987-Sqz perfs @ 2973-3265' w/ 250sx

Perfs @ 5175-5220' Sqz w/ 400sx-1995

Perfs @ 5647-5702'

8-3/4" hole @ 5712'
7" csg @ 5712'
DVT @ 4474'
w/ 428sx-TOC-2550'-TS

1999-6-1/4" hole @ 7500'
4-1/2" liner @ 4959-7500'
w/ 270sx-TOC-4959'-Circ


Perfs @ 7097-7273'

CIBP @ 7047'

PB-7418'

TD-7500'

OXY USA Inc. - Current
Bertie Whitmore #6
API No. 30-025-06016

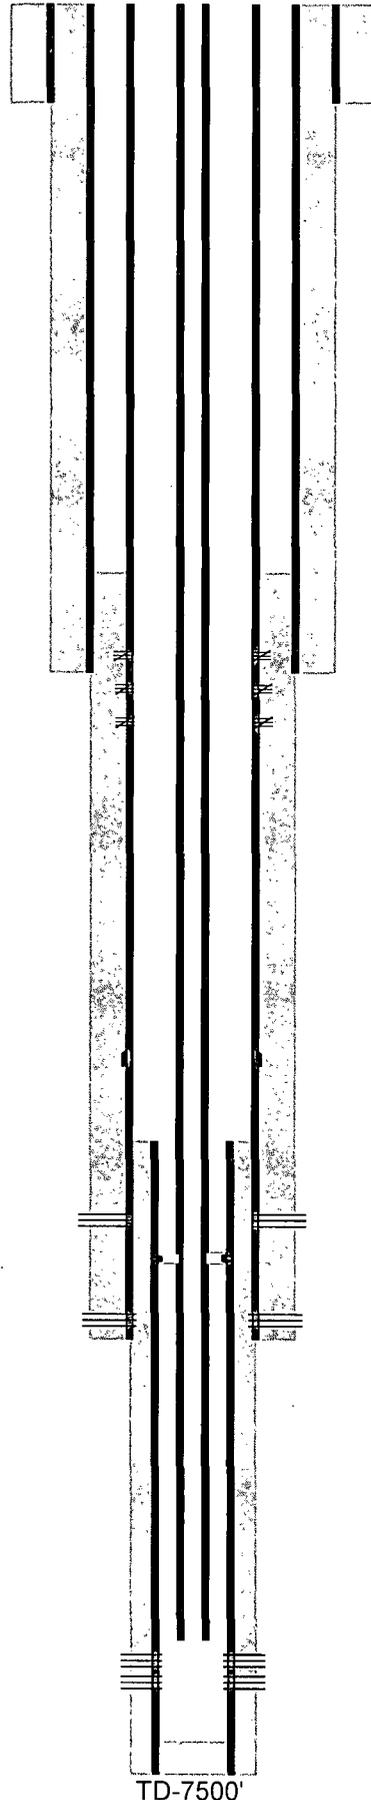

17-1/2" hole @ 469'
13-3/8" csg @ 469'
w/ 475sx-TOC-Surf-Circ

12-1/4" hole @ 2900'
9-5/8" csg @ 2900'
w/ 1700sx-TOC-Surf-Circ

1995-Sqz perfs @ 2825' w/ 300sx
1987-Sqz perfs @ 2973-3265' w/ 250sx

2-3/8" tbg @ 7246' w/ TAC @ 5983'

Perfs @ 5175-5220' Sqz w/ 400sx-1995

Perfs @ 5647-5702'

8-3/4" hole @ 5712'
7" csg @ 5712'
DVT @ 4474'
w/ 428sx-TOC-2550'-TS

1999-6-1/4" hole @ 7500'
4-1/2" liner @ 4959-7500'
w/ 270sx-TOC-4959'-Circ

Perfs @ 7097-7273'

PB-7418'

TD-7500'