

Submit 3 Copies To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 87240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
June 19, 2008

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-24927 ✓
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. E-43520
7. Lease Name or Unit Agreement Name: West Dollarhide Devonian Unit ✓
8. Well Number 119 ✓
9. OGRID Number 16696
10. Pool name or Wildcat Dollarhide; Devonian

SUNDRY NOTICES AND REPORTS ON WELLS

DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-1100) FOR PROPOSALS.)

1. Type of Well:

Oil Well ☐ Gas Well ☐ Other WIW ☒

2. Name of Operator

OXY USA Inc.

3. Address of Operator

P.O. Box 4294, Houston, TX 77210-4294

4. Well Location

Unit Letter H : 2180 feet from the North line and 450 feet from the East line

Section 32 Township 24-S Range 38-E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3178' GR

12. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

See Attached

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Mark Stephens TITLE Regulatory Compliance Analyst DATE 12/15/14
Type or print name Mark Stephens E-mail address: Mark_Stephens@oxy.com PHONE (713) 366-5158

For State Use Only

APPROVED BY Mark Whitaker TITLE Compliance Officer DATE 12/16/2014

Conditions of Approval (if any):

DEC 17 2014

West Dollarhide Devonian Unit No. 119

API No. 30-025-24927

Lea Co., NM

Plug and abandon the subject well as follows:


- 1) MI x RU PU.
- 2) Plug No. 1: Set CIBP within 100' of top perf x cap w/25 sx. cement. WOC x tag.
- 3) Plug No. 2: Top of Glorieta at 5236'. Spot 25 sx. plug at 5286'. WOC x tag.
- 4) Plug No. 3: Casing shoe at 3953. Shoe plug at 4003'. WOC x tag. SPOT 25 SX @ 4003'.
- 5) Plug No. 4: Top of Yates at 2738'. Perf @ 2700' x squeeze with a minimum of 25 sx. WOC x tag.
- 6) Plug No. 5: Top of Salt at 1166' (shoe plug here also). Perf @ ~~1250'~~ 1250', x squeeze with a minimum of 35 sx. WOC x tag no deeper than 1150'.
- 7) Plug No. 6: Perf at ~~100'~~ 100' x circulate to surface. Verify cement top.
- 8) Cut off wellhead x install dry hole marker w/labeling.
- 9) RD PU. Clean location x remove anchors.

250'

Closed-loop system will be used in accordance with Rule 19.15.17

CURRENT WELLBORE

OXY USA Inc. - Current
West Dollarhide Dev. Unit #119
API No. 30-025-24927

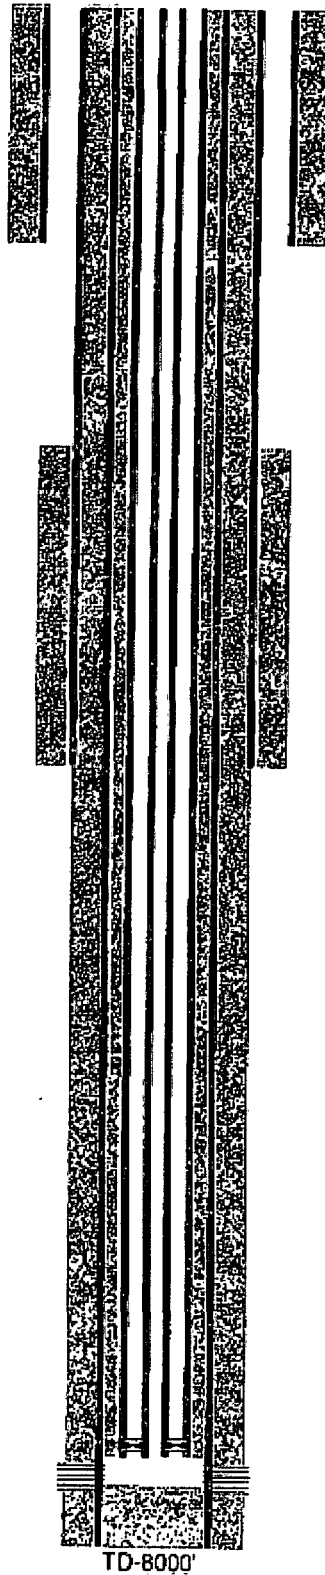

17-1/2" hole @ 1200'
13-3/8" csg @ 1200'
w/ 1130sx-TOC-Surf-Circ

1980-Perf @ 3200' sqz 1700sx, circ surf

11" hole @ 3954'
8-5/8" csg @ 3953'
w/ 340sx-TOC-2500'-TS

7-7/8" hole @ 8000'
5-1/2" csg @ 8000'
w/ 550sx-TOC-3400'-TS

4-1/2" csg @ 7623'
w/ 200sx-TOC-Surf-Circ

2-3/8" tbg & 4-1/2" Arrow LS Pkr @ 7514'

PB-7'878'

Perfs @ 7740-7888'

TD-8000'

PROPOSED WELLBORE

OXY USA Inc. - Current
West Dollarhide Dev. Unit #119
API No. 30-025-24927

Perf @ 100'. Circulate to
Surface

Top of Salt @ 1166. Shoe
plug here also. Perf @ 1250'.
Sqz minimum 35sx. WOC &
TAG no deeper than 1150'

Top of Yates @ 2738'. Perf
@ 2700'. Sqz minimum of
25sx. WOC & TAG

Csg show @ 3953'. Shoe
plug @ 4003'. TAG

Glorieta top @ 5236'. Plug w/
25sx @ 5286'. TAG

CIBP with 100' of perfs, cap
w/ 25sx. TAG

2-3/8" tbg & 4-1/2" Arrow LS Pkr @ 7614'

PB-7'878'

TD-8000'

17-1/2" hole @ 1200'
13-3/8" csg @ 1200'
w/ 1130sx-TOC-Surf-Circ

1980-Perf @ 3200' sqz 1700sx, circ surf

11" hole @ 3954'
8-5/8" csg @ 3953'
w/ 340sx-TOC-2500'-TS

7-7/8" hole @ 8000'
5-1/2" csg @ 8000'
w/ 550sx-TOC-3400'-TS

4-1/2" csg @ 7623'
w/ 200sx-TOC-Surf-Circ

Perfs @ 7740-7888'

