

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-24971
1. Type of Well: Oil Well ☐ Gas Well ☒ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator OXY USA Inc.		6. State Oil & Gas Lease No. L-101
3. Address of Operator P.O. Box 50250 Midland, TX 79710		7. Lease Name or Unit Agreement Name Mang B Com.
4. Well Location Unit Letter C : 660 feet from the north line and 2130 feet from the west line Section 36 Township 9S Range 32E NMPM County Lea		8. Well Number 1
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 4268'		9. OGRID Number 16696
		10. Pool name or Wildcat Flying M Atoka, S. (Gas)

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	P AND A ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB ☐	
DOWNHOLE COMMINGLE ☐			
CLOSED-LOOP SYSTEM ☐			
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-10925' PBD-10879' Perfs-10705-10811'
13-3/8" 48# csg @ 396' w/ 500sx, 17-1/2" hole, TOC-Surf-Circ
8-5/8" 32# csg @ 4693' w/ 700sx, 11" hole, TOC-2520'-TS
5-1/2" 15.5-17# csg @ 10925' w/ 900sx, 7-7/8" hole, TOC-8625'-TS
1. RIH & tag fish @ 10520', M&P 30sx cmt to 10300' WOC-Tag
2. M&P 35sx cmt @ 9300-9050' WOC-Tag
3. Cut & Pull 5-1/2" @ +/- 8250' M&P 35sx cmt @ 8300- 8175' WOC-Tag > 50' ABOVE CUTOFF
4. M&P 35sx cmt @ 7220-7120' WOC-Tag
5. M&P 35sx cmt @ 5600-5500' WOC-Tag
6. M&P 35sx cmt @ 4743-4643' WOC-Tag - Shoe
7. M&P 40sx cmt @ 3500-3400' WOC-Tag
8. Perf 8-5/8" @ 2250' sqz 65sx cmt to 2150' WOC-Tag
9. Perf 8-5/8" @ 1650' sqz 65sx cmt to 1550' WOC-Tag
10. Perf 8-5/8" @ 446' sqz 365sx cmt to Surface - Shoe
10# MLF between plugs
Above ground steel tanks will be utilized.

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Sr. Regulatory Advisor DATE 12/15/14


Type or print name David Stewart E-mail address: david_stewart@oxy.com PHONE: 432-685-5717

For State Use Only

APPROVED BY: Mark White TITLE Compliance Officer DATE 12/18/2014
Conditions of Approval (if any):

DEC 19 2014

OXY USA Inc. - Current
Marg B Com. #1
API No. 30-025-24971

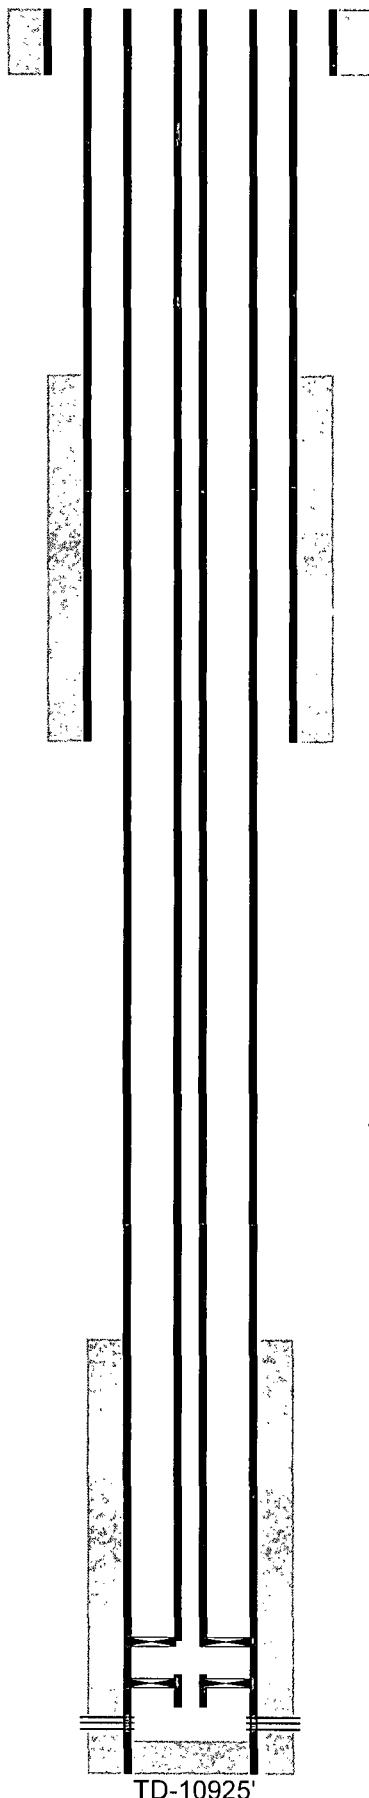

17-1/2" hole @ 396'
13-3/8" csg @ 396'
w/ 500sx-TOC-Surf-Circ

11" hole @ 4693'
8-5/8" csg @ 4693'
w/ 700sx-TOC-2520'-TS

7-7/8" hole @ 10925'
5-1/2" csg @ 10925'
w/ 900sx-TOC-8625'-TS

2-3/8" tbg & pkr @ 10217'

Fish @ 10520', Pkr @ 10524'

Perfs @ 10705-10811'

TD-10925'

OXY USA Inc. - Proposed
Marg B Com. #1
API No. 30-025-24971

365sx @ 446-Surface

65sx @ 1650-1550' WOC-Tag

65sx @ 2250-2150' WOC-Tag

40sx @ 3500-3400' WOC-Tag

35sx @ 4743-4643' WOC-Tag

35sx @ 5600-5500' WOC-Tag

35sx @ 7220-7120' WOC-Tag

35sx @ 8300-8175' WOC-Tag

35sx @ 9300-9050' WOC-Tag

30sx @ 10520-10300' WOC-Tag

Fish @ 10520', Pkr @ 10524'



Perf @ 446'


17-1/2" hole @ 396'
13-3/8" csg @ 396'
w/ 500sx-TOC-Surf-Circ



Perf @ 1650'




Perf @ 2250'

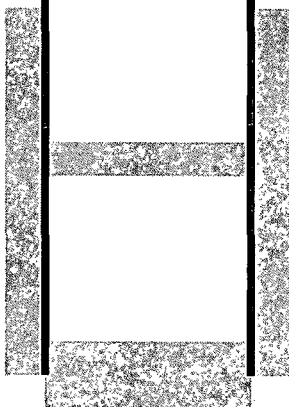


11" hole @ 4693'
8-5/8" csg @ 4693'
w/ 700sx-TOC-2520'-TS



Cut & pull 5-1/2" csg @ +/- 8250'



7-7/8" hole @ 10925'
5-1/2" csg @ 10925'
w/ 900sx-TOC-8625'-TS



Perfs @ 10705-10811'

TD-10925'