

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-38558
5. Indicate Type of Lease STATE ☒ FEE
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name PENNZOIL "B-36" STATE
8. Well Number 003
9. OGRID Number 162683
10. Pool name or Wildcat APACHE RIDGE; BONE SPRING

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG A WELL TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
CIMAREX ENERGY CO. OF COLORADO

3. Address of Operator
600 N. MARIENFELD, SUITE 600, MIDLAND, TEXAS 79701

4. Well Location
Unit Letter G : 1980 feet from the NORTH line and 1980 feet from the EAST line
Section 36 Township 19S Range 33E NMPM LEA County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3,608' - GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		E-PERMITTING	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REMI ☐	P&A NR ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COMI ☐	INT TO P&A ☒
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASII ☐	CSNG ☐
DOWNHOLE COMMINGLE ☐		TA ☐	RBDMS CHART ☐
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 35' by Wireline OR 25SXS BY TBG.
- 1) SET 4-1/2" CIBP @ 9,350'; DUMP BAIL 4 SXS. CMT. @ 9,350'-9,310'; CIRC. WELL W/ PXA FLUID.
 - 2) PUMP 25 SXS. CMT. @ 8,318'-8,318' (T/B.S.).
 - 3) CUT X PULL 4-1/2" LNR. @ +/-5,550'.
 - 4) PUMP 50 SXS. CMT. @ 5,625'-5,310' (4-1/2" LNR. CUT, 8-5/8" CSG. SHOE, T/DLWR.); WOC X TAG CMT. PLUG.
 - 5) PUMP 25 SXS. CMT. @ 2,563'-2,415' (5-1/2" REPAIRED CSG. COLLAPSE); WOC X TAG CMT. PLUG.
 - 6) CUT X PULL 5-1/2" CSG. @ +/-1,300'.
 - 7) PUMP 60 SXS. CMT. @ 1,419'-1,250' (T/ANHY., 5-1/2" CSG. CUT); WOC X TAG CMT. PLUG.
 - 8) PUMP 40 SXS. CMT. @ 635'-535' (13-3/8" CSG. SHOE); WOC X TAG CMT. PLUG.
 - 9) MIX X CIRC. TO SURF. 25 SXS. CMT. @ 63'-3'.
 - 10) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; WELD ON STEEL PLATE TO CSGS. X INSTALL DRY HOLE MARKER.

DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYSTEM W/ A STEEL TANK AND HAUL CONTENTS TO THE REQUIRED DISPOSAL, PER OCD RULE 19.15.17.

The Oil Conservation Division

Spud Date:

Rig Release Date:

MUST BE NOTIFIED 24 Hours
Prior to the beginning of operations

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

David A. Eyler

TITLE:

AGENT

DATE: 01/19/15

Type or print name: DAVID A. EYLER

E-mail address: DEYLER@MILAGRO-RES.COM

PHONE: 432.687.3033

For State Use Only

APPROVED BY:

Markus Brown

TITLE

Dist. Supervisor

DATE

1/26/2015

Conditions of Approval (if any):


JAN 28 2015



13 3/8" 48# csg @ 585'
Cmt w/400 sx, circ to surface

8-5/8" 32# K-55 @ 5360'
Cmt w/962 sx, TOC = Surface'

Full Liner:
4-1/2" 13.5# P110 ULTRA FJ @ 10363'
Cmt w/50 SX Super H- SBM
TOC 6100' (Weatherford CBL)
5-1/2" 17# N-80 @ 10415'
Cmt w/1225 SX DID NOT CIRC
TOC 1388' (CBL)

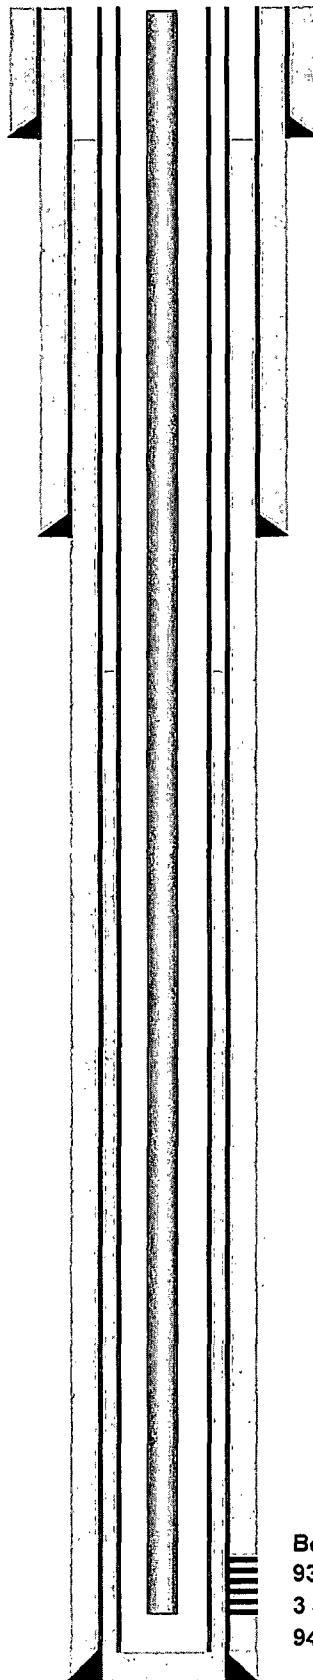

PBTD: 10,211'
TD: 13,700'

Cimarex Energy Co. of Colorado

Pennzoil "B-36" State #3

API 30-025-38300 **38558**

1650' FNL & 1650' FEL, Sec 36, T19S R33E

Lea County, NM

GL:3608' KB: 3625.5'

CIMAREX Property #309617-162

TOC 1600 by CBL

5-1/2" CSG TOC 1388' (CBL)

5 1/2" Csg collapsed 2475-2513'
Repaired & ran 4-1/2" liner

4-1/2" Liner TOC = 6100' by CBL

293 jts 2-3/8" L-80 Tbg (See Tubing Detail Sheet)
Rods & Pump (See Rod Detail Sheet)

Bone Spring Perfs:
9394-9416', 9444-9452', 9457-9461', 9464-9468'
3 SPF total of 118 holes
9486-9516' 4 SPF, 120 holes

