

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-37561
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. VO-6276
7. Lease Name or Unit Agreement Name Yarrow BHY State
8. Well Number 1
9. OGRID Number 025575
10. Pool name or Wildcat Brinninstool; Delaware

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR PROPOSALS.)	
1. Type of Well: Oil Well ☒ Gas Well ☐ Other	
2. Name of Operator Yates Petroleum Corporation	
3. Address of Operator 105 South Fourth Street, Artesia, NM 88210	
4. Well Location Unit Letter <u>A</u> : <u>990</u> feet from the <u>North</u> line and <u>990</u> feet from the <u>East</u> line Section <u>32</u> Township <u>23S</u> Range <u>33E</u> NMPM <u>Lea</u> County <u></u>	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3672'GR	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☐	REMEDIAL WORK ☐	ALTERING CASING ☐
TEMPORARILY ABANDON ☒	CHANGE PLANS ☐	COMMENCE DRILLING OPNS. ☐	P AND A ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASING/CEMENT JOB ☐	
DOWNHOLE COMMINGLE ☐			
CLOSED-LOOP SYSTEM ☐			
OTHER: ☐		OTHER: ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Yates Petroleum Corporation plans to temporarily abandon this well as follows:

1. MIRU all safety equipment as needed. NU BOP.
2. RIH with GR/JB to 7260'. Set a CIBP at 7250' with 35' Class "H" cement on top. WOC.
3. Tag TOC and load hole with 10 ppg brine plugging mud with 25#/bbl gel. Test casing to 500 psi for 30 min and record a chart for NMOCD.
4. TOH laying down tubing.
5. Cap wellhead and temporarily abandon the well.

Wellbore schematics attached

NOTE: When oil prices make the plugback economic, Yates will go back in and do the plugback and additional Delaware perms work that was submitted January 22, 2015 and approved January 28, 2015.

Spud Date: Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Tina Huerta TITLE Regulatory Reporting Supervisor DATE March 26, 2015

Type or print name Tina Huerta E-mail address: tinah@yatespetroleum.com PHONE: 575-748-4168

For State Use Only

APPROVED BY: Mark Brown TITLE Dist. Supervisor DATE 3/30/2015

Conditions of Approval (if any):

MAR 31 2015

WELL NAME: Yarrow BHY St #1 FIELD: _____

LOCATION: 990' FNL & 990' FEL of Section 32-23S-33E Lea County


GL: 3672 ZERO: _____ KB: 3689.5

SPUD DATE: 02/26/06 COMPLETION DATE: 6/21/06

COMMENTS: API No. 30-025-37561

CASING PROGRAM

13-3/8" 48# H40 ST&C	720'
8-5/8" 32# J55 ST&C	5,150'
5 1/2" 17# J-55 LT&C	561'
5 1/2" 15.5# J55 LT&C	6,681'
5 1/2" 17# J55 LT&C	1,880'
	9,140'

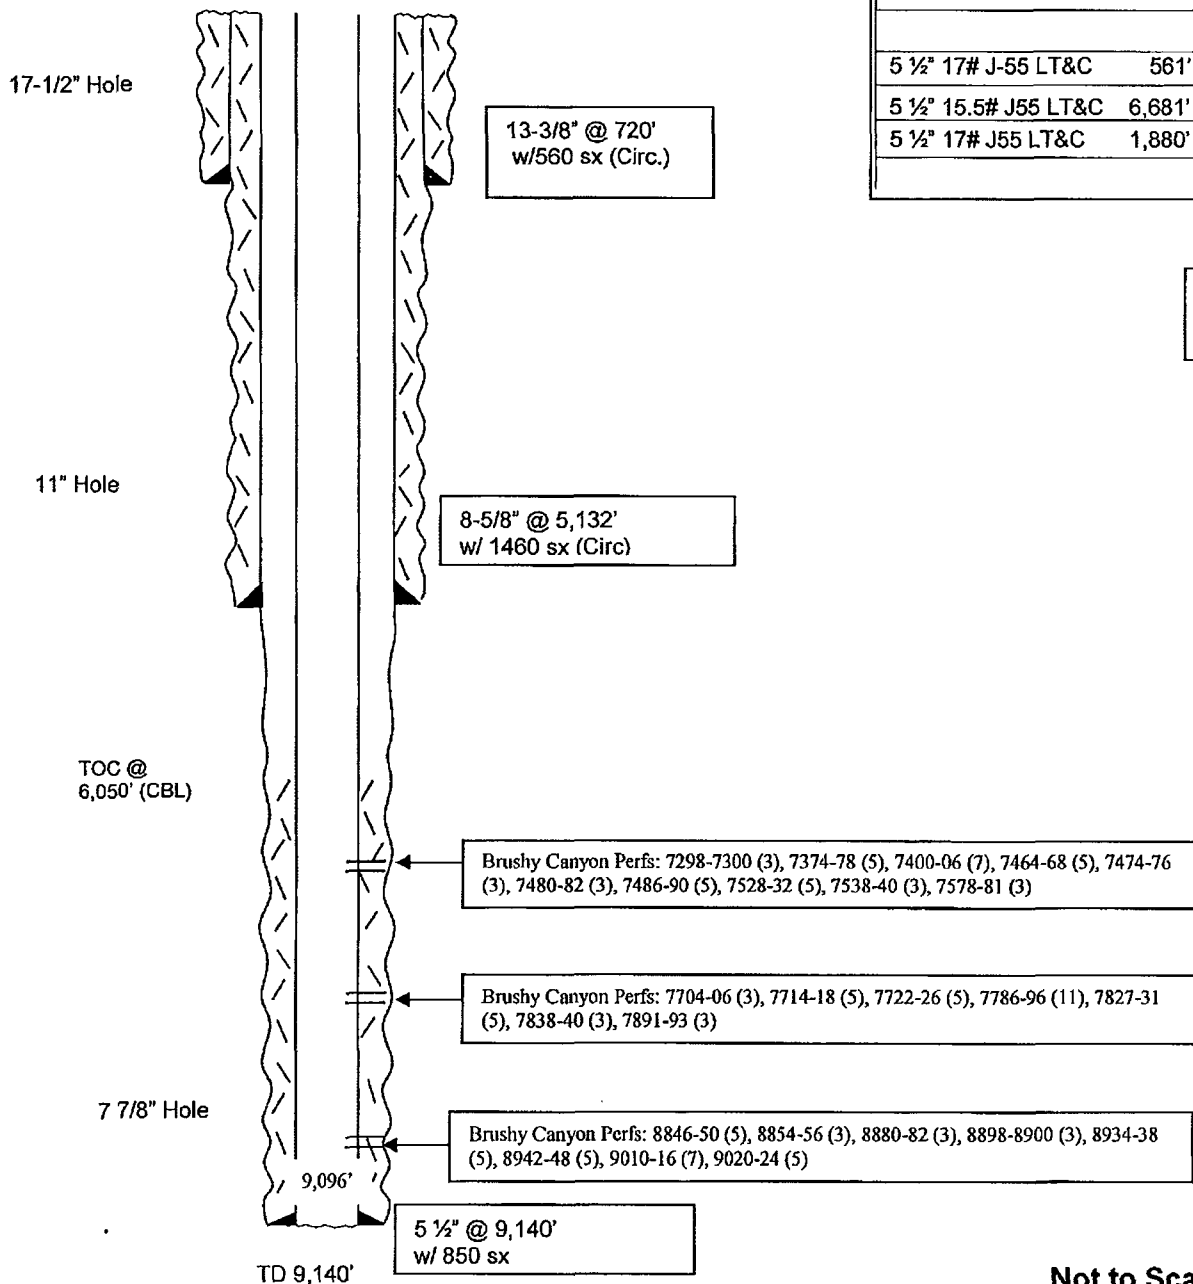

Before

Not to Scale
3/10/15
BAL

WELL NAME: Yarrow BHY St #1 FIELD:

LOCATION: 990' FNL & 990' FEL of Section 32-23S-33E Lea County

GL: 3672 ZERO: KB: 3689.5

SPUD DATE: 02/26/06 COMPLETION DATE: 6/21/06

COMMENTS: API No. 30-025-37561

CASING PROGRAM

13-3/8" 48# H40 ST&C	720'
8-5/8" 32# J55 ST&C	5,150'
5 1/2" 17# J-55 LT&C	561'
5 1/2" 15.5# J55 LT&C	6,681'
5 1/2" 17# J55 LT&C	1,880'
	9,140'

17-1/2" Hole

13-3/8" @ 720'
w/560 sx (Circ.)

11" Hole

8-5/8" @ 5,132'
w/ 1460 sx (Circ)

TOC @ 6,050' (CBL)

CIBP @ 7,250'
w/ 35'cmt

Brushy Canyon Perfs: 7298-7300 (3), 7374-78 (5), 7400-06 (7), 7464-68 (5), 7474-76 (3), 7480-82 (3), 7486-90 (5), 7528-32 (5), 7538-40 (3), 7578-81 (3)

Brushy Canyon Perfs: 7704-06 (3), 7714-18 (5), 7722-26 (5), 7786-96 (11), 7827-31 (5), 7838-40 (3), 7891-93 (3)

7 7/8" Hole

Brushy Canyon Perfs: 8846-50 (5), 8854-56 (3), 8880-82 (3), 8898-8900 (3), 8934-38 (5), 8942-48 (5), 9010-16 (7), 9020-24 (5)

9,096'

5 1/2" @ 9,140'
w/ 850 sx

TD 9,140'

AFTER

Not to Scale
3/10/15
BAL