

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

Form C-103
Revised July 18, 2013

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30/PA5/22713
1. Type of Well: Oil Well ☐ Gas Well ☐ Other ☐		5. Indicate Type of Lease STATE ☒ FEE ☐
2. Name of Operator CROWNQUIST OPERATING, LLC		6. State Oil & Gas Lease No. 302407
3. Address of Operator Box 53310, Midland, Tx. 79710		7. Lease Name or Unit Agreement Name STATE 23 COM
4. Well Location Unit Letter K : 1980 feet from the SOUTH line and 1980 feet from the WEST line Section 23 Township 14S Range 32E NMPM County LEA		8. Well Number 1
11. Elevation (Show whether DR, RKB, RT, GR, etc.) GR 4294		9. OGRID Number 213190
		10. Pool name or Wildcat TULSA, PENN

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		E-PERMITTING <SWD INJECTION>	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REM ☐	CONVERSION ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COM ☐	RETURN TO ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CASI ☐	CSNG ☐
DOWNHOLE COMMINGLE ☐			CHG LOC ☐
CLOSED-LOOP SYSTEM ☐			INT TO P&A NR ☐
OTHER: ☐			P&A R ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

CIBP @ 9000' w/35' CMT
CUT + PULL 5 1/2" @ 7000' 7050' - 6950'
* 50 SKS. @ 7000' - 6900' WOC + TAG
* 85 SKS. @ 4070' - 3970' WOC + TAG
* 40 SKS. @ 3200' - 3100'
CUT + ATTEMPT TO PULL 5 1/2" @ 2600'
* 60 SKS. @ 2400' - 2500' 2650' - 2550'
* 60 SKS. @ 1700' - 1600' - 1500'
* 100 SKS. @ 425' - 325' WOC + TAG
30 SKS. @ SURFACE

Fill hole w/ 9.0 MLF
* PERF & SQZ. IF CSS. NOT PULLED
* TAG ALL PERF & SQZ.

The Oil Conservation Division
MUST BE NOTIFIED 24 Hours
Prior to the beginning of operations

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE R. Smith TITLE P&A MANAGER DATE 4-13-15

Type or print name RANDY SMITH E-mail address RSMITH@PETROSMITH.COM PHONE: 325-691-1085
For State Use Only

APPROVED BY: Misty Brown TITLE Dist. Supervisor DATE 4/16/2015

Conditions of Approval (if any):

APR 16 2015


Wellbore Schematic (From Surface to TD)

Printed: 3/9/2015

State 23 Com # 1

Property#: 200980-01

API # 3002522713

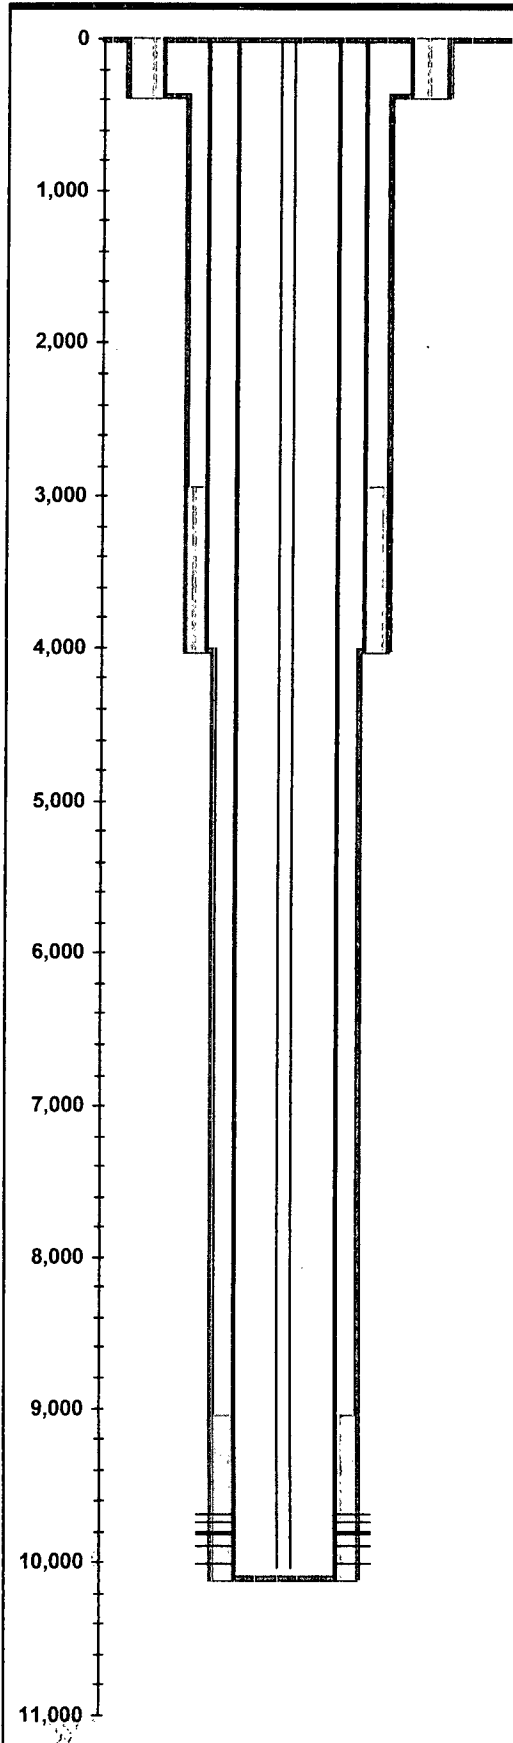

1980' FSL & 1980' FWL	GL Elev: 4,294.00	KOP:	
Sec,Blk,Sur(Lbr,Lge,Sur)or(Sec,Twn,Rng): 23, ,		Fill Depth:	
County, State: Lea, NM		PBTD:	10,053.00
Aux ID:		TD:	10,100.00
KB = ; DF = ; All Depths Corr To:		BOP:	

Hole Size

Diameter	Top At	Btm At	Date Drilled
17.5000	0.00	375.00	8/26/1968
11.0000	375.00	4,020.00	9/1/1968
7.8750	4,020.00	10,100.00	9/28/1968

Surface Casing

Date Ran: 8/26/1968

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	10	13.3750	48.00	H40	375.00	0.00	375.00

Intermediate Casing

Date Ran: 9/1/1968

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	129	8.6250	32.00		4,020.00	0.00	4,020.00
24# & 32#.							

Production Casing String 1

Date Ran: 9/28/1968

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	316	5.5000	17.00	J55	10,100.00	0.00	10,100.00
15.5# & 17#, J-55 & N-80, ST&C & LT&C.							

Cement

# Sx	Class	Weight	I D	O D	Top At	Btm At	TOC Per
400	A		13.375	17.500	0.00	375.00	Circ
300	C		8.625	11.000	2,950.00	4,020.00	Calc
200	C		5.500	7.875	9,060.00	10,100.00	Calc

Zone and Perfs

Perforations

Top	Bottom	Formation	Status	Opened	Closed	# / Ft	Ttl #
9,691.00	10,005.00	PENN	A			2	34
(2 spf, 34 holes) 9691' - 9697', 9780' - 9783', 9927' - 9930', 10,000' - 10,005'							
9,737.00	9,743.00	PENN	A			2	14
(2 spf, 14 holes) 9737' - 9743'							
9,809.00	9,816.00	PENN	A			2	16
(2 spf, 16 holes) 9809' - 9816'							
9,891.00	9,896.00	PENN	A			2	12
(2 spf, 12 holes) 9891' - 9896'							

Tubing String 1

Date Ran: 12/1/2005

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Tbg Sect 1	308	2.3750	4.70	J55	10,029.00	0.00	10,029.00

Handwritten notes and signatures at the bottom right of the page, including a date "12/1/2005" and a signature.


Wellbore Schematic (From Surface to TD)

Printed: 3/9/2015

State 23 Com # 1

Property#: 200980-01

API # 3002522713

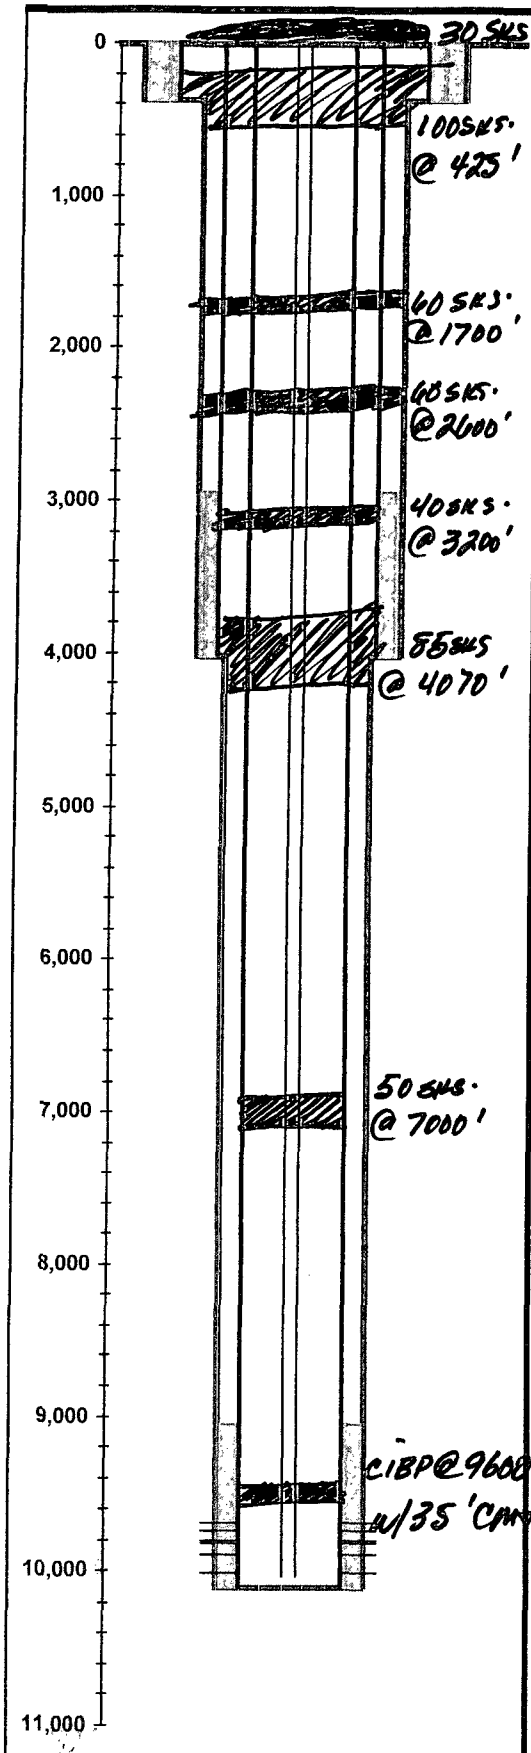

1980' FSL & 1980' FWL	GL Elev: 4,294.00	KOP:	
Sec,Blk,Sur(Lbr,Lge,Sur)or(Sec,Twn,Rng): 23, ,		Fill Depth:	
County, State: Lea, NM		PBTD:	10,053.00
Aux ID:		TD:	10,100.00
KB = ; DF = ; All Depths Corr To:		BOP:	

Hole Size

Diameter	Top At	Btm At	Date Drilled
17.5000	0.00	375.00	8/26/1968
11.0000	375.00	4,020.00	9/1/1968
7.8750	4,020.00	10,100.00	9/28/1968

Surface Casing

Date Ran: 8/26/1968

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	10	13.3750	48.00	H40	375.00	0.00	375.00

Intermediate Casing

Date Ran: 9/1/1968

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	129	8.6250	32.00		4,020.00	0.00	4,020.00
24# & 32#							

Production Casing String 1

Date Ran: 9/28/1968

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	316	5.5000	17.00	J55	10,100.00	0.00	10,100.00
15.5# & 17#, J-55 & N-80, ST&C & LT&C.							

Cement

# Sx	Class	Weight	I D	O D	Top At	Btm At	TOC Per
400	A		13.375	17.500	0.00	375.00	Circ
300	C		8.625	11.000	2,950.00	4,020.00	Calc
200	C		5.500	7.875	9,060.00	10,100.00	Calc

Zone and Perfs

Perforations

Top	Bottom	Formation	Status	Opened	Closed	# / Ft	Ttl #
9,691.00	10,005.00	PENN	A			2	34
(2 spf, 34 holes) 9691'- 9697', 9780'- 9783', 9927'- 9930', 10,000' - 10,005'							
9,737.00	9,743.00	PENN	A			2	14
(2 spf, 14 holes) 9737' - 9743'							
9,809.00	9,816.00	PENN	A			2	16
(2 spf, 16 holes) 9809' - 9816'							
9,891.00	9,896.00	PENN	A			2	12
(2 spf, 12 holes) 9891' - 9896'							

Tubing String 1

Date Ran: 12/1/2005

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Tbg Sect 1	308	2.3750	4.70	J55	10,029.00	0.00	10,029.00