

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL/API NO. 3002535298
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. 302600
7. Lease Name or Unit Agreement Name NEW MEXICO AT STATE
8. Well Number 26
9. OGRID Number 213190
10. Pool name or Wildcat SAUNDIAS; PRMD UPPER PENN

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)	
1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐	HOBBSOCD
2. Name of Operator CROWN RUST OPERATING, LLC	APR 15 2015
3. Address of Operator BOX 53310, MIDLAND, TX. 79710	RECEIVED
4. Well Location Unit Letter N : 540 feet from the SOUTH line and 1880 feet from the WEST line Section 15 Township 14S Range 33E NMPM County LEA	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 6R 4808	

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		E-PERMITTING <SWD INJECTION>	
PERFORM REMEDIAL WORK ☐	PLUG AND ABANDON ☒	REM ☐	CONVERSION ☐
TEMPORARILY ABANDON ☐	CHANGE PLANS ☐	COM ☐	RETURN TO ☐
PULL OR ALTER CASING ☐	MULTIPLE COMPL ☐	CAS ☐	CSNG ☐
DOWNHOLE COMMINGLE ☐			CHG LOC ☐
CLOSED-LOOP SYSTEM ☐			INT TO P&M ☒ P&A NR ☐ P&A R ☐
OTHER: ☐		OTHL ☐	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

C1BP @ 9600' w/35' CMT
25SKS @ 7000' - 6900'
85SKS @ 4161' - 4000' WOC + TAG
CUT 5 1/2 @ 3300' POH
*** 40SX @ 3200' - 3100' 3350' - 3250' WOC & TAG**
*** 40SX @ 2400' - 2500'**
*** 40SX @ 1700' - 1600' 1650' - 1550'**
*** 50SX @ 460' - 285' WOC & TAG**
10SX @ SURFACE 60' - 0'

Fill hole w/9.0 MLF
*** PERF & SQZ. if 5 1/2 NOT PULLED**
*** TAG ALL PERF & SQZ.**

The Oil Conservation Division
MUST BE NOTIFIED 24 Hours
Prior to the beginning of operations

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE R. Smith TITLE PLA MANAGER DATE 4-13-15

Type or print name RANDY SMITH E-mail address: RSMITH@PETROSMITH.COM PHONE: 325-691-1085
For State Use Only

APPROVED BY: Mary Brown TITLE Dist. Supervisor DATE 4/16/2015

Conditions of Approval (if any):

APR 16 2015

dm


Wellbore Schematic (From Surface to TD)

Printed: 3/9/2015

New Mexico AT State # 26

Property#: 200754-26

API # 3002535298

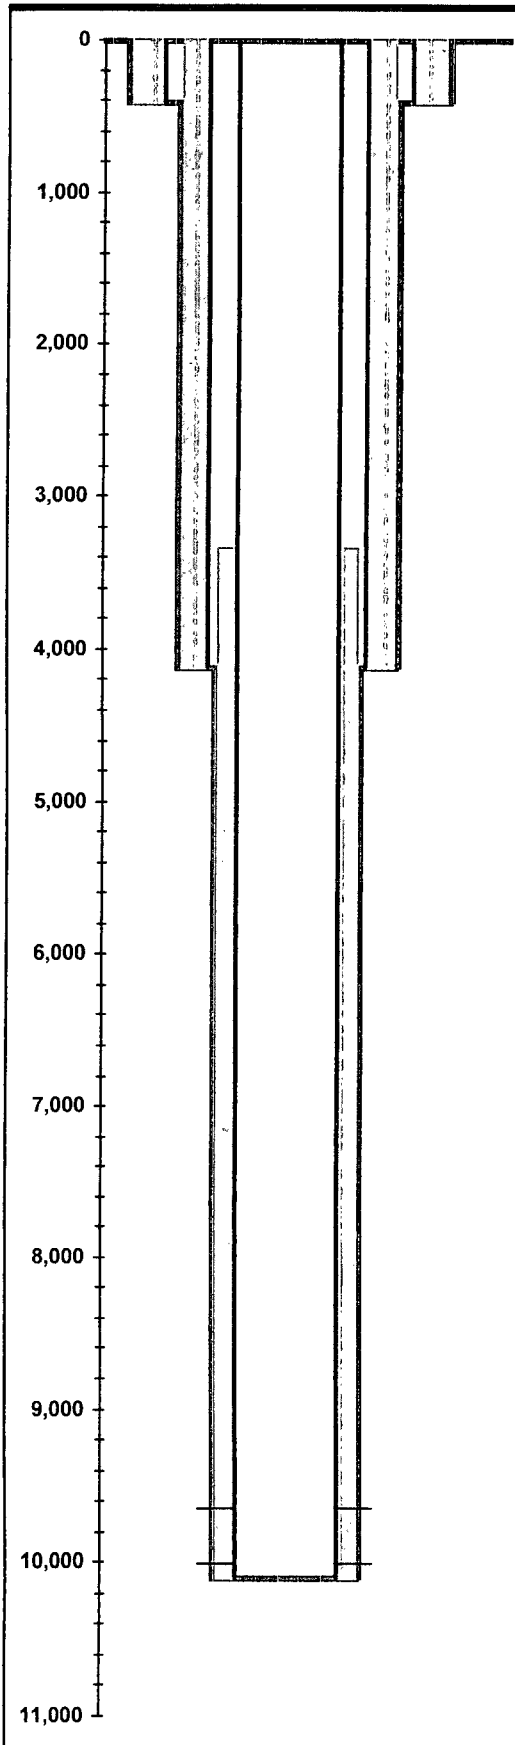

560' FSL & 1880' FWL	GL Elev: 4,208.00	KOP:	
Sec,Blk,Sur(Lbr,Lge,Sur)or(Sec,Twn,Rng): 15, ,		Fill Depth:	
County, State: Lea, NM		PBTD:	10,100.00
Aux ID:		TD:	10,100.00
KB = ; DF = ; All Depths Corr To:		BOP:	

Hole Size

Diameter	Top At	Btm At	Date Drilled
17.5000	0.00	410.00	4/28/2001
12.0000	410.00	4,111.00	5/5/2001
7.8750	4,111.00	10,100.00	5/25/2001

Surface Casing

Date Ran: 4/28/2001

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	15	13.3750	54.50	J55	410.00	0.00	410.00

Intermediate Casing

Date Ran: 5/5/2001

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	95	8.6250	32.00	J55	4,111.00	0.00	4,111.00
24# J-55 ST&C and 32# J-55 ST&C							

Production Casing String 1

Date Ran: 5/25/2001

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	268	5.5000	17.00	J55	10,100.00	0.00	10,100.00
N-80 and J-55							

Cement

# Sx	Class	Weight	I D	O D	Top At	Btm At	TOC Per
420	C		13.375	17.500	0.00	410.00	Circ
1475	C		8.625	12.000	0.00	4,111.00	Circ
1300	C		5.500	7.875	3,345.00	10,100.00	Calc

Zone and Perfs

Perforations

Top	Bottom	Formation	Status	Opened	Closed	# / Ft	Ttl #
9,654.00	10,004.00	PENN	A			3	204
(3 spf, 204 holes) 9654'-63', 9704'-12', 9716'-19', 9721'-23', 9748'-51', 9760'-64', 9776'-82', 9801'-15', 9831', 9870'-74', 9897', 9908'-10', 9990'-94', 10,002'-04'							

NO TUBING


Wellbore Schematic (From Surface to TD)

Printed: 3/9/2015

New Mexico AT State # 26

Property#: 200754-26

API # 3002535298

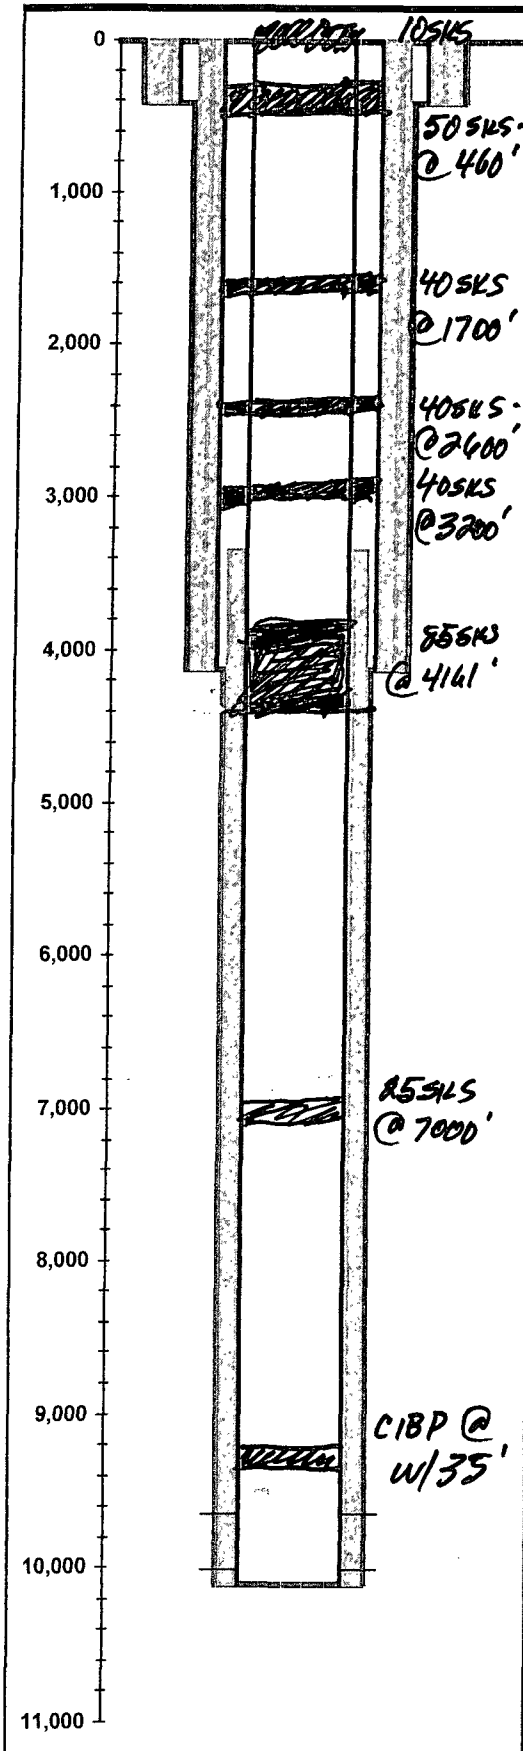

560' FSL & 1880' FWL	GL Elev: 4,208.00	KOP:	
Sec,Blk,Sur(Lbr,Lge,Sur)or(Sec,Twn,Rng): 15,,		Fill Depth:	
County, State: Lea, NM		PBTD:	10,100.00
Aux ID:		TD:	10,100.00
KB = ; DF = ; All Depths Corr To:		BOP:	

Hole Size

Diameter	Top At	Btm At	Date Drilled
17.5000	0.00	410.00	4/28/2001
12.0000	410.00	4,111.00	5/5/2001
7.8750	4,111.00	10,100.00	5/25/2001

Surface Casing

Date Ran: 4/28/2001

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	15	13.3750	54.50	J55	410.00	0.00	410.00

Intermediate Casing

Date Ran: 5/5/2001

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	95	8.6250	32.00	J55	4,111.00	0.00	4,111.00

24# J-55 ST&C and 32# J-55 ST&C

Production Casing String 1

Date Ran: 5/25/2001

Description	#	Diameter	Weight	Grade	Length	Top At	Btm At
Casing	268	5.5000	17.00	J55	10,100.00	0.00	10,100.00

N-80 and J-55

Cement

# Sx	Class	Weight	I D	O D	Top At	Btm At	TOC Per
420	C		13.375	17.500	0.00	410.00	Circ
1475	C		8.625	12.000	0.00	4,111.00	Circ
1300	C		5.500	7.875	3,345.00	10,100.00	Calc

Zone and Perfs

Perforations

Top	Bottom	Formation	Status	Opened	Closed	# / Ft	Ttl #
9,654.00	10,004.00	PENN	A			3	204

(3 spf, 204 holes) 9654'-63', 9704'-12', 9716'-19', 9721'-23', 9748'-51', 9760'-64', 9776'-82', 9801'-15', 9831', 9870'-74', 9897', 9908'-10', 9990'-94', 10,002'-04'

NO TUBING