

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-25754
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name FOWLER STATE <input checked="" type="checkbox"/>
8. Well Number 002 <input checked="" type="checkbox"/>
9. OGRID Number 162683
10. Pool name or Wildcat LANGLIE-MATTIX

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

HOBBS OCD

1. Type of Well: Oil Well ☒ Gas Well ☐ Other ☐

2. Name of Operator
CIMAREX ENERGY CO. OF COLORADO ☒

JUN 15 2015

3. Address of Operator
600 N. MARIENFELD, SUITE 600, MIDLAND, TEXAS 79701

RECEIVED

4. Well Location

Unit Letter L : 2310 feet from the SOUTH line and 990 feet from the WEST line
Section 16 Township 24S Range 37E NMPM LEA County ☒

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3,244' - GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

REMI
COM
CASI

E-PERMITTING <SWD ☐ INJECTION>
CONVERSION ☐ RBDMS ☐
RETURN TO ☐ TA ☐
CSNG ☐ CHG LOC ☐
INT TO P&A ☒ P&A NR ☐ P&A R ☐

OTHER: ☐

OTHER:

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1) SET 4-1/2" CIBP @ 3,200'; PUMP 45 SXS. CMT. @ 3,200'-2,805' (T/QN, T/7-R); CIRC. WELL W/ PXA FLUID.
- 2) PUMP 30 SXS. CMT. @ 2,625'-2,375' (T/YATES, DV TOOL, B/SALT); WOC X TAG CMT. PLUG.
- 3) PUMP 25 SXS. CMT. @ 1,270'-1,060' (T/SALT, T/ANHY.); WOC X TAG CMT. PLUG.
- 4) MIX X CIRC. TO SURF. 50 SXS. CMT. @ 500'-3' (8-5/8" CSG. SHOE).
- 5) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; WELD ON STEEL PLATE TO CSGS. X INSTALL DRY HOLE MARKER.

PRES. TEST
CASING.

DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYSTEM W/ A STEEL TANK AND HAUL CONTENTS TO THE REQUIRED DISPOSAL, PER OCD RULE 19.15.17.

Spud Date:

Rig Release Date:

The Oil Conservation Division
MUST BE NOTIFIED 24 Hours
Prior to the beginning of operations

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

David A. Eyer

TITLE: AGENT

DATE: 06/11/15

Type or print name: DAVID A. EYLER

E-mail address: DEYLER@MILAGRO-RES.COM PHONE: 432.687.3033

For State Use Only

APPROVED BY:

Malay Brown

TITLE

Dist. Supervisor

DATE

6/25/2015

Conditions of Approval (if any)

JUN 25 2015



Cimarex Energy Co. of Colorado
Fowler State #2

API #30-025-25754

2310' FSL & 990' FEL


Sec. 16, T-24-S, R-37E, Lea Co., NM

J Piwetz

6/10/2015

Spudded: 1/18/1978

Original Operator: Doyle Hartman

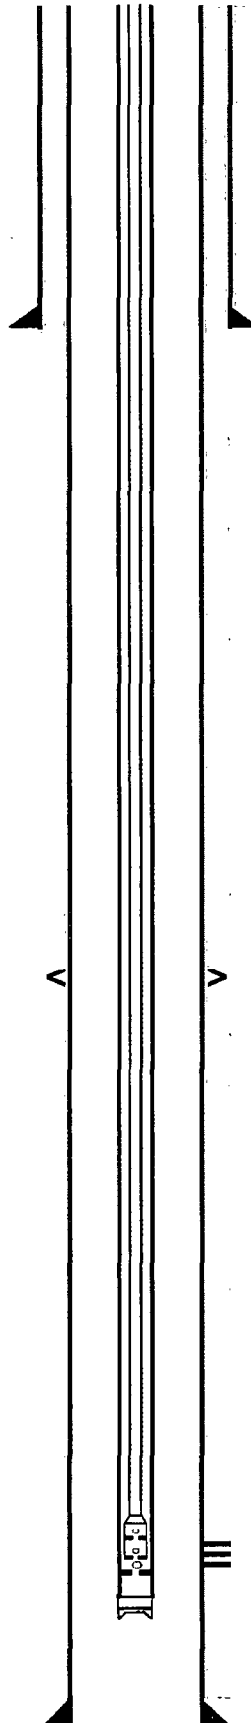

8 5/8", 24# csg @ 447'
cmt'd w/ 325 sx Circulated

Tubing (2/17/2004)
106 jts 2 3/8" 4.7# 8rd J-55 Tbg @ 3374'
1 2-3/8" SN

Rods
1 1-3/4" x 22' PSPR w/1-1/2" x 10' PRL
134 3/4" rods
1 3/4" x 2' pony
Pump - 2" X 1-1/4" X 12'

DV Tool @ 2508'
Cement Circulated

Queen perms (3239' - 3324')

TD @ 3504'
PBD @ 3480'

4-1/2" 10.5# K-55 @ 3504'
Cemented 1st Stage w/450 sx
Cemented 1st Stage w/300 sx, circ 135 sx to surf

CIMAREX

Cimarex Energy Co. of Colorado

Fowler State #2

API #30-025-25754

2310' FSL & 990' FEL

Sec. 16, T-24-S, R-37E, Lea Co., NM

J Piwetz

6/10/2015

Spudded: 1/18/1978

Original Operator: Doyle Hartman

T/ANHY ~ 1110'
T/SALT ~ 1220'
B/SALT ~ 2425'
T/YATES ~ 2575'
T/7-R ~ 2855'
T/QN. ~ 3185'

DV Tool @ 2508'
Cement Circulated

