

N.M. Oil Cons. Division
1625 N. French Dr.
Hobbs, NM 88240

Form 3160-5
(September 2001)

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

FORM APPROVED
OMB No. 1004-0135
Expires January 31, 2004

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use Form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side

1. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No.
2. Name of Operator KEVIN O. BUTLER & ASSOCIATES, INC.		6. If Indian, Allottee or Tribe Name
3a. Address P O BOX 1171 Midland, TX 79702	3b. Phone No. (include area code) 432-682-1178	7. If Unit or CA/Agreement, Name and/or No.
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Unit Letter P 766 FSL 766 FEL Sec 12 T 15S R 34E Lea County, NM		8. Well Name and No. FEDERAL A # 1
		9. API Well No. 30-025-21806
		10. Field and Pool, or Exploratory Area MORTON WOLFCAMP (47370)
		11. County or Parish, State LEA COUNTY, NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA



TYPE OF SUBMISSION	TYPE OF ACTION			
<input type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recompleat horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompleat in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

Plug & Abandon Well

See Attached

Approved as to plugging of the well bore.
Liability under bond is retained until
surface restoration is completed.

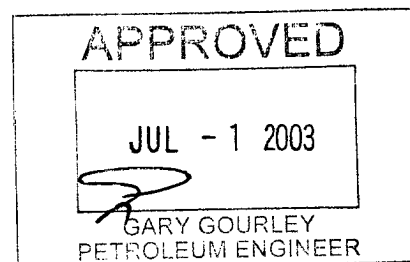

14. I hereby certify that the foregoing is true and correct	
Name (Printed/Typed) Kevin O. Butler	Title President
Signature 	Date 06-20-03

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved by	Title	Date
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.	Office	

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

(Instructions on reverse)

BWW

JUL 07 2003

MAYO MARRS CASING PULLING INC.
BOX 863
KERMIT, TEXAS 79745

KEVIN O. BUTLER & ASSOCIATES

Lease: FEDERAL -A- # 1 - NM 015072-A

Project: P & A - CEMENTING REPORT

5-21-03 - SET CICR @ 8057' - SQUEEZED 200 SXS-20 SXS ON TOP-7900'
5-22-03 - SPOT 40 SXS @ 5627'-5577' TAGGED
5-23-03 - SPOT 25 SXS @ 4670'-4479'-PERFORATED @ 4620' TEST TO 1200#
5-26-03 - PERF @ 2290' - SQUEEZED 60 SXS @ 2290'-2110' TAGGED
5-26-03 - SQUEEZED HOLE @ 726'-583' TAGGED
5-27-03 - PERF @ 405'-TEST TO 1200# - SPOT 25 SXS @ 455'-355'
5-27-03 - SPOT 10 SXS @ 100' TO SURFACE

INSTALL DRY HOLE MARKER
CIRCULATE 10# MUD