

Submit 3 Copies To Appropriate District  
Office  
District I  
1625 N. French Dr., Hobbs, NM 88240  
District II  
1301 W. Grand Ave., Artesia, NM 88210  
District III  
1000 Rio Brazos Rd., Aztec, NM 87410  
District IV  
1220 S. St. Francis Dr., Santa Fe, NM  
87505

State of New Mexico  
Energy, Minerals and Natural Resources

Form C-103  
Revised June 10, 2003

OIL CONSERVATION DIVISION  
1220 South St. Francis Dr.  
Santa Fe, NM 87505

WELL API NO. 30-025-34519
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>
6. State Oil & Gas Lease No. 23826

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.) 1. Type of Well: Oil Well <input type="checkbox"/> Gas Well <input checked="" type="checkbox"/> Other	7. Lease Name or Unit Agreement Name Townsend 2 State Com
	8. Well Number 1
2. Name of Operator Devon Energy Production Company, LP	9. OGRID Number 6137
3. Address of Operator 20 North Broadway, Suite 1500, Oklahoma City, Oklahoma 73102	10. Pool name or Wildcat Townsend Permo Upper Penn

4. Well Location Unit Letter <u>O</u> : 2970' feet from the <u>South</u> line and 1980' feet from the <u>East</u> line Section <u>2</u> Township <u>16S</u> Range <u>35E</u> Lea County
---

11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3990' GL
--

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data	
NOTICE OF INTENTION TO: PERFORM REMEDIAL WORK <input type="checkbox"/> PLUG AND ABANDON <input type="checkbox"/> TEMPORARILY ABANDON <input type="checkbox"/> CHANGE PLANS <input type="checkbox"/> PULL OR ALTER CASING <input type="checkbox"/> MULTIPLE COMPLETION <input type="checkbox"/> OTHER: <input type="checkbox"/>	SUBSEQUENT REPORT OF: REMEDIAL WORK <input type="checkbox"/> ALTERING CASING <input type="checkbox"/> COMMENCE DRILLING OPNS. <input type="checkbox"/> PLUG AND ABANDONMENT <input checked="" type="checkbox"/> CASING TEST AND CEMENT JOB <input type="checkbox"/> OTHER: <input type="checkbox"/>

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. MIRU for P&A on 12/22/05. Circulated hole with 9 ppg mud.
2. Pulled 5517' of parted 4-1/2" casing. Spot 100' cement plug at 5567'. Did not tag. Spot 2<sup>nd</sup> 100' cement plug at 5567'. Did not tag.
3. Spot 50 sx cement plug at 5567'. Tagged TOC at 5557'. Spot 50 sx cement plug at 5557'. Tagged TOC at 5537'.
4. Spot 75 sx cement plug at 5537'. Tagged TOC at 5537'. No additional fill. Spot 100 sx cement plug at 5537'. Tagged TOC at 5376'.
5. Spot 177' at 4790'. Tagged TOC at 4613'. Covers 8-5/8" casing shoe at 4740'.
6. Spot 115' cement at 2638'. Tagged TOC at 2523'.
7. Spot 107' cement at 486'. Tagged TOC at 379'. Covers 13-3/8" casing shoe at 436'.
8. Spot 60' surface cement plug. Cut off wellhead and set dry hole marker. **Well plugged & abandoned on 1/7/06.**

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Ronnie Slack TITLE: Engineering Technician DATE 1/9/06

Type or print name Ronnie Slack E-mail address: Ronnie.Slack@dv.com Telephone No. 405-552-4615

(This space for State use)

APPROVED BY Larry W. Wink TITLE OC FIELD REPRESENTATIVE II/STAFF MANAGER DATE JAN 12 2006  
Conditions of approval, if any

Approved as to plugging of the Well Bore.  
Liability under bond is retained until  
surface restoration is completed.


**DEVON ENERGY PRODUCTION COMPANY LP**

Well Name: Townsend 2 State Com #1		Field: Townsend	
Location: 2970' FSL & 1980' FEL; SEC 2-T16S-R35E		County: Lea	State: NM
Elevation: 3990' GL		Spud Date: 11/2/1998	Compl Date:
API#: 30-025-34519	Prepared by: Seyi Harris	Date: 02/05/05	Rev: 1/9/06 by Ronnie Slack

**PLUGGED & ABANDONED 1/7/06**

17-1/2" hole  
13-3/8", 48#, H40, @ 436'  
 Cemented w/415 sx

11" Hole  
8-5/8", 32#, J55, @ 4740'  
 Cmt'd w/1625 sx

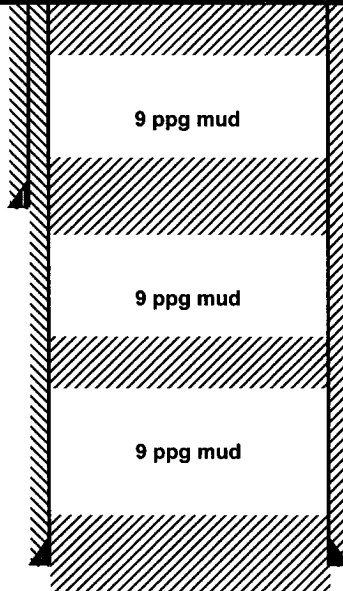

Spot cement from 60' to surface  
 Cut off wellhead & set dry hole marker  
**Well plugged & abandoned on 1/7/06**

Spot 107' cement at 486'. **Tagged TOC @ 379'**

Spot 115' cement at 2638'. **Tagged TOC @ 2523'**

Spot 177' cement at 4790'. **Tagged TOC @ 4613'**

9 ppg mud

**Casing part @ 5579'**

Note: prior work, tried to get past casing part with mule shoe. Unable to ascertain if tubing was being diverted to backside of casing. Got down to 8046'.

**Pulled 5517' of 4-1/2" casing**

1. Spot cement plug at 5467-5567. Did not tag
2. Spot cement plug at 5467-5567. Did not tag
3. Spot 50 sx cement @ 5567'. Tagged TOC @ 5557'
4. Spot 50 sx cement @ 5557'. Tagged TOC @ 5537'
5. Spot 75 sx cement @ 5537'. Tagged TOC @ 5537'
6. Spot 100 sx cement @ 5537'. **Tagged TOC @ 5376'**

Note: not sure where this plug was set. Plug was set prior to Devon taking over operatorship.  
**Plug likely set @ 10954'**

**CISCO Perfs:**


11004' - 11020' (Apr 00)  
 11100' - 11116'

**Atoka Perfs:**

11881' - 11898'

7-7/8" Hole

4-1/2", 11.6#, S95 & N80, @ 12798'  
 Cmt'd w/800 sx. TOC @ 9300'

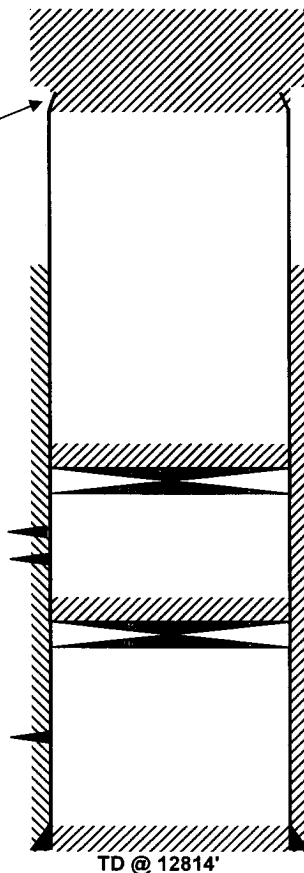

PBD @ 11250'  
 CIBP @ 11270' w/20' cement on top

PBTD @ 12666'