

Submit 3 Copies To Appropriate District
Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM
87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-30054
5. Indicate Type of Lease STATE ☐ FEE ☒
6. State Oil & Gas Lease No. B-9613
7. Lease Name or Unit Agreement Name West Dollarhide Drinkard Unit
8. Well Number: 94
9. OGRID Number
10. Pool name or Wildcat Dollarhide Tubbs Drinkard

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A
DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH
PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other:

2. Name of Operator
Chevron USA Inc

3. Address of Operator
P.O. Box 7139, Midland, Texas 79708

4. Well Location

Unit Letter L : 2550 feet from the South line and 130 feet from the West line
Section 32 Township 24S Range 38E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3141' GR

Pit or Below-grade Tank Application ☐ or Closure ☐

Pit type STEEL Depth to Groundwater 30 Distance from nearest fresh water well over 1000 Distance from nearest surface water

Pit Liner Thickness: mil Below-Grade Tank: Volume bbls; Construction Material

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Notify NMOCD 24 hrs. prior to MI&RU.
2. RIH, spot 30sx cement plug from 6350'-6150' (Drinkard). WOC Tag.
3. Displace hole w/MLF, 9.5 ppg brine w/12.5 gel p/bbl.
4. Spot 35sx cement plug 3650'-3400' (Queen, casing leak).
5. Spot 80sx cement plug 3100'-2400' (8-5/8" shoe, B. salt) WOC Tag.
6. Spot 40sx cement plug 1400'-1100' (13-3/8" shoe, T. salt) WOC Tag.
7. Perf and squeeze 80sx cement plug 300'-surface (surface) WOC Tag.
8. Install dry hole marker.



I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE M. Lee Roark TITLE Agent DATE 1/18/2006

Type or print name M. Lee Roark

E-mail address:

Telephone No. (432) 561-8600

For State Use Only

APPROVED BY: Gary W. Wink TITLE DATE

Conditions of Approval (if any):

OC FIELD REPRESENTATIVE II/STAFF MANAGER JAN 26 2006

THE OIL CONSERVATION DIVISION MUST
BE NOTIFIED 24 HOURS PRIOR TO THE
BEGINNING OF PLUGGING OPERATIONS.

PLUGGING & ABANDONMENT WORKSHEET

(3 STRING CSNG)

OPERATOR CHEVRON USA INC.
 LEASENAME West Dollarhide Drinkard Unit
 WELL # 94
 SECT 32 TWN 24S RNG 38E
 FROM 2550' W/L 130' W/L
 TD: 6856' FORMATION @ TD Abo
 PBTD: 6,793' FORMATION @ PBTD Abo

MLF

13 3/8"
@ 1,204'
 TOC surface

MLF

8 5/8"
@ 3,050'
 TOC surface

MLF

MLF

5 1/2"
@ 4,856'
 TOC 700'
 DV tool @ 4,023'

Fish in hole: TOF @ 6,381'
 Fish is TAC and MA.

TD 6,856'

	SIZE	SET @	TOC	TOC DETERMINED BY
SURFACE	13 3/8"	1,204'	surface	circ.
INTMED 1	8 5/8"	3,050'	surface	circ.
INTMED 2				
PROD	5 1/2"	6,856'	700'	CBL
	SIZE	TOP	BOT	TOC DETERMINED BY
LINER 1				
LINER 2				
CUT & PULL @			TOP - BOTTOM	
INTMED 1			PERFS	6,362' - 6,824'
INTMED 2			OPENHOLE	-
PROD				

* REQUIRED PLUGS DISTRICT I *

PLUG	TYPE	BACKS	DEPTH
PLUG	PLUG	CMNT	
EXAMPLES			
PLUG #1	OH	25 SXS	9850'
PLUG #2	SHOE	50 SXS	8700'-8800'
PLUG #3	CIBP/35'		5300'
PLUG #4	CIBP	25 SXS	5300'
PLUG #5	STUB	50 SXS	4500'-4700'
PLUG #6	RETNR SQZ	200 SXS	400
PLUG #7	SURF	10 SXS	0-10'
PLUG #1	Peris	30sx	6,350'-150'
PLUG #2	Queen	35sx	3,650'-3,400'
PLUG #3	shoe	80sx	3,100'-2,400'
PLUG #4	B. Salt	-	-
PLUG #5	shoe	40 sx	1,400'-1,100'
PLUG #6	T. Salt	-	-
PLUG #7	surface	80sx	300'-surface
PLUG #8			
PLUG #9			
PLUG #10			
PLUG #11			
PLUG #12			
PLUG #13			
PLUG #14			
PLUG #15			
PLUG #16			
PLUG #17			
PLUG #18			
PLUG #19			
PLUG #20			
PLUG #21			
PLUG #22			
PLUG #23			
PLUG #24			
PLUG #25			
PLUG #26			
PLUG #27			
PLUG #28			
PLUG #29			
PLUG #30			
PLUG #31			
PLUG #32			
PLUG #33			
PLUG #34			
PLUG #35			
PLUG #36			
PLUG #37			
PLUG #38			
PLUG #39			
PLUG #40			
PLUG #41			
PLUG #42			
PLUG #43			
PLUG #44			
PLUG #45			
PLUG #46			
PLUG #47			
PLUG #48			
PLUG #49			
PLUG #50			
PLUG #51			
PLUG #52			
PLUG #53			
PLUG #54			
PLUG #55			
PLUG #56			
PLUG #57			
PLUG #58			
PLUG #59			
PLUG #60			
PLUG #61			
PLUG #62			
PLUG #63			
PLUG #64			
PLUG #65			
PLUG #66			
PLUG #67			
PLUG #68			
PLUG #69			
PLUG #70			
PLUG #71			
PLUG #72			
PLUG #73			
PLUG #74			
PLUG #75			
PLUG #76			
PLUG #77			
PLUG #78			
PLUG #79			
PLUG #80			
PLUG #81			
PLUG #82			
PLUG #83			
PLUG #84			
PLUG #85			
PLUG #86			
PLUG #87			
PLUG #88			
PLUG #89			
PLUG #90			
PLUG #91			
PLUG #92			
PLUG #93			
PLUG #94			
PLUG #95			
PLUG #96			
PLUG #97			
PLUG #98			
PLUG #99			
PLUG #100			

16 111

Well: West Dollarhide Drinkard Unit #94

Field: Dollarhide

Reservoir: Tubb / Drinkard

Location:

2550' FSL & 130' FWL
Section: 32 (NW/4 NW/4 SW/4)
Township: 24S
Range: 38E Unit: I
County: Lea State: NM

Elevations:

GL: 3141
KB: 3158
DF: 3157

Log Formation Tops

1142	
1256	Rustler 1196
1370	Salt 1303
1484	Base Salt 2550
1598	Queen 3552
1712	San Andres 3996
1826	Glorieta 5125
1941	Tubb 6022
2055	Drinkard 6270
2169	Abo 6540
2283	
2397	

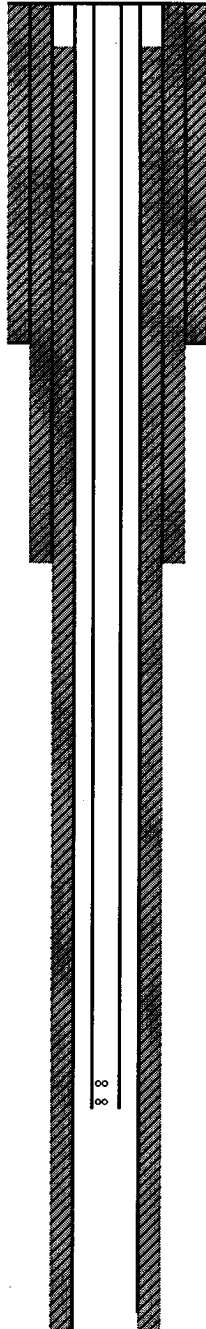
TUBING DETAIL - 1/23/01

RKB correction: 17'
195 jts - 2 7/8" tbg
1 TAC
4jts 2 7/8" tbg
1jt 2 7/8" IPC 505
1 2 7/8" SN
1 3 1/2" x 2 7/8" mud jt w/ purge valve
SN @ 6246 TAC @ 6193
EOT @

DV tool @ 4023 ; cir 47 sx 1st stage

TAC @ 6193

Prod. Csg: 5 1/2" 15.5# & 17# J-55 LTC
Set: @ 6856 w/1000 sx class H cmt ; DV tool @ 4023
Hole Size: 7 7/8" to 6856
Circ: No **TOC:** 700 (stage 1 cir 47 sx cmt)
TOC By: CBL

**Current
Wellbore Diagram****Well ID Info:**

Chevron: IM0876
API No: 30-025-30054
L5/L6: U88 / 1500
Spud Date: 11/15/87
Rig Released: 11/30/87
Compl. Date: 1/3/88

Surface Csg: 13 3/8" 54.5# K-55 STC

Set: @ 1204 w/ 1400 sx class H cmt
Hole Size: 17 1/2" TO 1204
Circ: Yes **TOC:** Surface
TOC By: Circulation (330 sx)

Intermediate Csg: 8 5/8" 32# K-55 LTC

Set: @ 3050 w/ 1300 sx class H cmt
Hole Size: 12 1/4" to 3050
Circ: Yes **TOC:** Surface
TOC By: Circulation (140 sx)

Initial Completion:

10/90 (Abo) perf (2jspf) 6541-47, 6554-55, 6566-69, 6576-78, 6585-87, 6597-6603,
6612-16, 6628-30, 6634-38, 6651-54, 6658-61, 6664-68, 6673, 6698-6700, 6712-14,
6726-29, 6734-38, 6745-48, 6752-53, 6756-58, 6768-70, 6822-24 ; perf (1jspf) 6576,
6618, 6735 ; A/12000 gal 15% NEFE
(Drinkard) perf (2jspf) 6362-66, 6371-73, 6394-97, 6407-11, 6413-18, 6430-35, 6438-
42, 6448-52, 6455-57, 6460-65, 6475-86, 6493-95, 6498-6507 ;
A/12000 gal 15% NEFE

Subsequent Work

8/92 Swaged out 5 1/2" csg 6404-6445 ; tagged PBTB @ 6793 ; A/5000 gal 15% NEFE
& scale sqz w/2 drums 5/97 A/3000 gal 15% & scale sqz w/2 drums 3/98 Swedge
6424-72 ; A/3000 gal 15% HCL w/Sonic Hammer 1/01 A/5000 gal 15% NEFE & scale
sqz w/1 drum TH793

1/16/2006 Hung up center spear with 3 3/4" od at 6,412' while going after 3 1/2" OD mud anchor.

Perfs

6362-66, 6371-73, 6394-97, 6407-11, 6413-18, 6430-35, 6438-42
6448-52, 6455-57, 6460-65, 6475-86, 6493-95, 6498-6507

Status

Drinkard - open
Drinkard - open

6541-47, 6554-55, 6566-69, 6576-78, 6585-87, 6597-6603, 6612-16
6628-30, 6634-38, 6651-54, 6658-61, 6664-68, 6673, 6698-6700
6712-14, 6726-29, 6734-38, 6745-48, 6752-53, 6756-58, 6768-70
6822-24

Abo - open
Abo - open
Abo - open
Abo - open

TD: 6856 COTD: 6825 PBTB: 6793

Updated: 2-18-05 by WAYN

By: W.P. Johnson

New Mexico Office of the State Engineer
POD Reports and Downloads

Township: 24S Range: 38E Sections:

NAD27 X: Y: Zone: ☐ Search Radius:County: LE ☐ Basin: ☐ Number: Suffix:Owner Name: (First) (Last) ☐ Non-Domestic ☐ Domestic ☒ All

POD / Surface Data Report

Avg Depth to Water Report

Water Column Report

Clear Form

iWATERS Menu

Help

AVERAGE DEPTH OF WATER REPORT 01/18/2006

Bsn	Tws	Rng	Sec	Zone	X	Y	Wells	(Depth Water in Feet)		
								Min	Max	Avg
L	24S	38E	23				1	30	30	30

Record Count: 1