

State of New Mexico
Energy, Minerals and Natural Resources Department

Form C-103
Revised 1-1-89

DISTRICT I

1625 N. French Drive, Hobbs, NM 88240

OIL CONSERVATION DIVISION

310 Old Santa Fe Trail, Room 206
Santa Fe, New Mexico 87503

WELL API NO.	30-025-27140
5. Indicate Type of Lease	FED <input type="checkbox"/> STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name	NORTH HOBBS (G/SA) UNIT
SECTION	32
8. Well No.	222
9. Pool name or Wildcat	HOBBS (G/SA)

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101 FOR SUCH PROPOSALS.)	
1. Type of Well:	Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other INJECTOR
2. Name of Operator	OCCIDENTAL PERMIAN, LTD.
3. Address of Operator	1017 W STANOLIND RD.
4. Well Location	Unit Letter F : 1720 Feet From The NORTH Line and 1370 Feet From The WEST Line Section 32 Township 18-S Range 38-E NMPM LEA County
10. Elevation (Show whether DF, RKB, RT GR, etc.)	3634' GL


11. Check Appropriate Box to Indicate Nature of Notice, Report, or Other Data	
NOTICE OF INTENTION TO:	SUBSEQUENT REPORT OF:
PERFORM REMEDIAL WORK <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>
PLUG AND ABANDON <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>
CHANGE PLANS <input type="checkbox"/>	PLUG & ABANDONMENT <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	CASING TEST AND CEMENT JOB <input type="checkbox"/>
OTHER: <input type="checkbox"/>	OTHER: Re perforate liner. <input checked="" type="checkbox"/>

12. Describe Proposed or Completed Operations (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work) SEE RULE 1103.

RUPU. POH with injection equipment.
Perforate 4.5" liner 4112-18, 4138-46, 41569-60, 4164-68, 4180-90.
RIH w/4.5" Guiberson G-6 pkr, XL on/off tool w/1.875 "F" nipple, 130 jts 2-7/8" Duoline tbg.
Pkr set @4048'. Bottom of tbg @4048'.
Circ csg w/pkr fluid.
Test csg to 540 psi for 30 min and chart for the NMOCD.
RDPU. Clean Location.

Well returned to injection 07/11/2003.

RIG UP DATE: 07/09/2002
RIG DOWN DATE: 07/11/2003

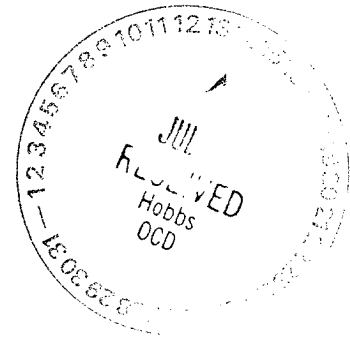

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE Robert Gilbert TITLE SR. ENGR TECH DATE 07/12/2003
TYPE OR PRINT NAME Robert Gilbert NO. 505/397-8206

(This space for State Use)

APPROVED BY Harry W. Wink TITLE OC FIELD REPRESENTATIVE II/STAFF MANAGER DATE JUL 15 2003
CONDITIONS OF APPROVAL IF ANY:

