

Submit 3 Copies To Appropriate District Office
District I
1625 N. French Dr., Hobbs, NM 88240
District II
1301 W. Grand Ave., Artesia, NM 88210
District III
1000 Rio Brazos Rd., Aztec, NM 87410
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
May 27, 2004

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-30829
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No. B-9613
7. Lease Name or Unit Agreement Name West Dollarhide Drinkard Unit
8. Well Number: 107
9. OGRID Number
10. Pool name or Wildcat Dollarhide Tubb Drinkard
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3141' GR

SUNDRY NOTICES AND REPORTS ON WELLS
(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG-BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☐ Other:

2. Name of Operator

Chevron USA Inc

3. Address of Operator

P.O. Box 7139, Midland, Texas 79708

4. Well Location

Unit Letter I: 1435 feet from the South line and 1211 feet from the East line
Section 32 Township 24S Range 38E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3141' GR

Pit or Below-grade Tank Application ☐ or Closure ☐

Pit type STEEL Depth to Groundwater 30 Distance from nearest fresh water well over 1000 Distance from nearest surface water

Pit Liner Thickness: mil Below-Grade Tank: Volume bbls; Construction Material

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☐ ALTERING CASING ☐
COMMENCE DRILLING OPNS. ☐ P AND A ☐
CASING/CEMENT JOB ☐

OTHER: ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 1103. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

1. Notify NMOCD 24 hrs. prior to MI&RU.
2. RIH, Tag CIBP @ 6,150' and spot 25sx cement plug from 6,150'-5,950' (Tubb).
3. Displace hole w/MLF, 9.5 ppg brine w/12.5 gel p/bbl.
4. Perf and squeeze 65sx cement plug from 4,100' - 3,900' (8 5/8 shoe, San Andres) WOC Tag.
5. Perf and squeeze 45sx cement plug from 2,775' - 2,375' (Yates, B. salt). — WOC TAG
6. Perf and squeeze 30sx cement plug from 1,350' - 1,100' (11 3/4 shoe, T. salt). — WOC TAG
7. Spot 25sx cement plug from 200'-surface (surface) WOC Tag ?
8. Install dry hole marker.

I hereby certify that the information above is true and complete to the best of my knowledge and belief. I further certify that any pit or below-grade tank has been/will be constructed or closed according to NMOCD guidelines ☐, a general permit ☐ or an (attached) alternative OCD-approved plan ☐.

SIGNATURE M. Lee Roark TITLE Agent DATE 3/14/2006

Type or print name M. Lee Roark

For State Use Only

E-mail address:

Telephone No. (432) 561-8600

APPROVED BY: Gary W. Wink TITLE OCD FIELD REPRESENTATIVE II/STAFF MANAGER DATE

Conditions of Approval (if any):

MAR 21 2006

THE OIL CONSERVATION DIVISION MUST
BE NOTIFIED 24 HOURS PRIOR TO THE
BEGINNING OF PLUGGING OPERATIONS.

Location:

1435' FSL & 1211' FEL
 Section: 32 (SW/4 NE/4 SE/4)
 Township: 24S
 Range: 38E Unit: I
 County: Lea State: NM

Elevations:

GL: 3168
 KB: 3186
 DF: 3185

Log Formation Tops

Rustler	1177
Salt	1250
Base Salt	2483
Yates	2670
Queen	3605
San Andres	4013
Glorieta	5147
Tubb	6000
Drinkard	6388
Abo	6574

TUBING DETAIL - 8/2/96

RKB correction: 12'
 194 jts - 2 7/8" tbg (6247.66')
 1 5 1/2" x 2 7/8" TAC (2.78')
 19jts tbg (601.07')
 1jt IPC (31.00')
 1 2 7/8" SN (1.10')
 1 3 1/2" MA (27.80')


SN @ TAC @
 EOT @ measurements don't add up

DV tool @ 4204 ; sqzd w/150 sx

Rod Detail : 8/2/96

1 1 1/4" x 26' Polish Rod w/1 1/2" x 16' liner
 1 1" sub (4')
 1 1" sub (4')
 1 1" sub (4')
 1 1" sub (8')
 86 1" D rods (2167.2')
 86 7/8" EL rods (2167.2')
 93 3/4" D rods (2343.6')
 1 7/8" sub (2')
 6 1 3/4" sinker bars (151.2')
 1 1" sub (2')
 1 2.5" x 1.75" RHBC pmp (23')
 1 Slotted GA (10')

Prod. Csg: 5 1/2" 15.5# K-55 & 17# K-55 & L-80 LTC
Set: @ 6901 w/1297 sx class H cmt ; DV tool @ 4204
Hole Size: 7 7/8" to 6901
Circ: No **TOC:** surface (Braidenhead squeeze)
TOC By: Braidenhead squeeze

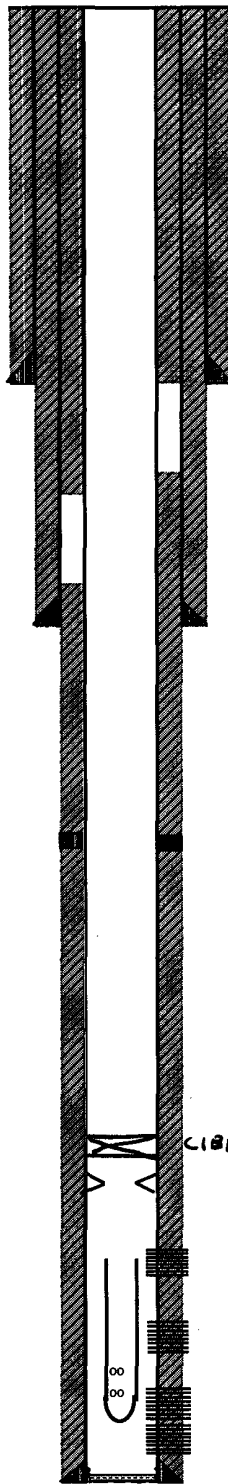Current Wellbore Diagram**Well ID Info:**

Chevno: KZ8809
 API No: 30-025-30829
 L5/L6: U88 / 1500
 Spud Date: 3/21/91
 Rig Released: 4/8/91
 Compl. Date: 5/2/91

Surface Csg: 11 3/4" 42# H-40 STC

Set: @ 1200 w/ 1000 sx class H cmt
Hole Size: 14 3/4" TO 1200
Circ: Yes **TOC:** Surface
TOC By: Circulation (190 sx)

Intermediate Csg: 8 5/8" 32# K-55 LTC

Set: @ 4000 w/ 1450 sx class H cmt
Hole Size: 11" to 4000
Circ: Yes **TOC:** Surface
TOC By: Circulation (480 sx)

Initial Completion:

4/91 Sqz thru DV tool w/150 sx class H cmt
 4/91 (Abo) perf (1jspf) 6626-31, 6638-40, 6650-62, 6706, 6709-11, 6715, 6724-28, 6732-35, 6738-40, 6746-50, 6772-74, 6820-24, 6826-29 & 6832-34
 A/7500 gal 15% NEFE
 (Drinkard) perf (1jspf) 6421-24, 6428-34, 6438-42, 6447-53, 6460-64, 6474-76, 6480-84, 6492-6502, 6508-14, 6520-22, 6532, 6541-44, 6570-73 ; A/7500 gal 15% NEFE

Subsequent Work

7/96 (Drinkard / Abo 6421-6834) A/5000 gal 15% HCL NEFE ; AF/24672 gal 50Q CO2 foamed acid & 42200 gal 50Q CO2 foamed WF140 ; Perf Tubb (2jspf) 6214-6242 ; A/2000 gal 15% NEFE

Fish Remaining in the Hole

Approx 18 joint tbg
 SN
 Mud Joint
 17 3/4" Rods
 6 1-3/4" k-bars
 Pump
 TOF at +/-6220'

Perfs

{ 6214-42

Status

Tubb - open


{ 6421-24, 6428-34, 6438-42, 6447-53, 6460-64, 6474-76, 6480- Drinkard - open
 { 6492-6502, 6508-14, 6520-22, 6532, 6541-44, 6570-73 Drinkard - open

{ 6626-31, 6638-40, 6650-62, 6706, 6709-11, 6715, 6724-28 Abo - open
 { 6732-35, 6738-40, 6746-50, 6772-74, 6820-24, 6826-29, 6832- Abo - open

TD: 6901 COTD: 6880 PBTD: 6880

Updated: 4-18-05 by WAYN

By: W.P. Johnson

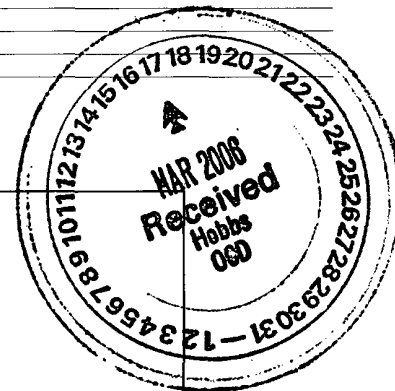

**New Mexico Office of the State Engineer
POD Reports and Downloads**

Township: 24S Range: 38E Sections:

NAD27 X: Y: Zone: ☐ Search Radius:County: LE ☐ Basin: ☐ Number: Suffix:Owner Name: (First) (Last) ☐ Non-Domestic ☐ Domestic ☒ All

POD / Surface Data Report

Avg Depth to Water Report

Water Column Report

Clear Form

iWATERS Menu

Help

AVERAGE DEPTH OF WATER REPORT 03/14/2006

(Depth Water in Feet)

Bsn	Tws	Rng	Sec	Zone	X	Y	Wells	Min	Max	Avg
L	24S	38E	23				1	30	30	30

Record Count: 1

