

Submit 1 Copy To Appropriate District Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

| |
|---|
| WELL API NO. 30-025-11570 |
| 5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/> |
| 6. State Oil & Gas Lease No. |
| 7. Lease Name or Unit Agreement Name Leary McBuffington |
| 8. Well Number 9 |
| 9. OGRID Number 16696 |
| 10. Pool name or Wildcat Langlie Mattix TR QUGB |
| 11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3078' |

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR PROPOSALS.)

1. Type of Well: Oil Well Gas Well Other

2. Name of Operator
OXY USA Inc.

3. Address of Operator
P.O. Box 50250 Midland, TX 79710

4. Well Location
 Unit Letter K : 1650 feet from the South line and 1980 feet from the West line
 Section 13 Township 25S Range 37E NMPM County Lea

HOBBS OGD
 OCT 16 2015
 RECEIVED

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

- PERFORM REMEDIAL WORK PLUG AND ABANDON
 TEMPORARILY ABANDON CHANGE PLANS
 PULL OR ALTER CASING MULTIPLE COMPL
 DOWNHOLE COMMINGLE
 CLOSED-LOOP SYSTEM
 OTHER:

- RE E-PERMITTING <SWD INJECTION>
 CO CONVERSION RBDMS
 CA RETURN TO TA
 CSNG ENVIRO CHG LOC
 INT TO P&A P&A NR P&A R
 OTHER:

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15. NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-7100' PBD-3030' Perfs-3135-3165' CIBP-3030'

13-3/8" 35.6-48# csg @ 419' w/ 415sx, 17-1/4" hole, TOC-Surf Circ
 9-5/8" 32.3-36# csg @ 3449', DVT @ 1603' w/ 1828sx, 12-1/2" hole, TOC-Surf-Circ
 7" 23-29.7# csg @ 7100' w/ 735sx, 8-3/4" hole, TOC-2620'-TS

1. RIH & tag CIBP @ 3030', M&P 25sx cmt to 2930' **PRESSURE TEST CSG.**
 2. Perf @ 1653' sqz 40sx cmt to 1553' WOC-Tag
 3. Perf @ 469' sqz 180sx cmt to surface
 10# MLF between plugs
 Above ground steel tanks will be utilized

Spud Date:

[Empty box for Spud Date]

Rig Release Date:

[Empty box for Rig Release Date]

**The Oil Conservation Division
 MUST BE NOTIFIED 24 Hours
 Prior to the beginning of operations**

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Sr. Regulatory Advisor DATE 10/12/15

Type or print name David Stewart E-mail address: david_stewart@oxy.com PHONE: 432-685-5717

For State Use Only

APPROVED BY: Maley Brown TITLE Dist Supervisor DATE 10/19/2015

Conditions of Approval (if any):

OCT 20 2015

dm

OXY USA Inc. - Proposed
Learcy McBuffington #9
API No. 30-025-11570

180sx @ 469'-Surface

40sx @ 1653-1553' WOC-Tag

25sx @ 3030-2930'
1/09 - CIBP @ 3030'


CIBP @ 3298'

25sx @ 5045-4900'

25sx @ 6277-6127'

CIBP @ 6465 w/ 2sx cmt

CR, sqz 25 sx cmt

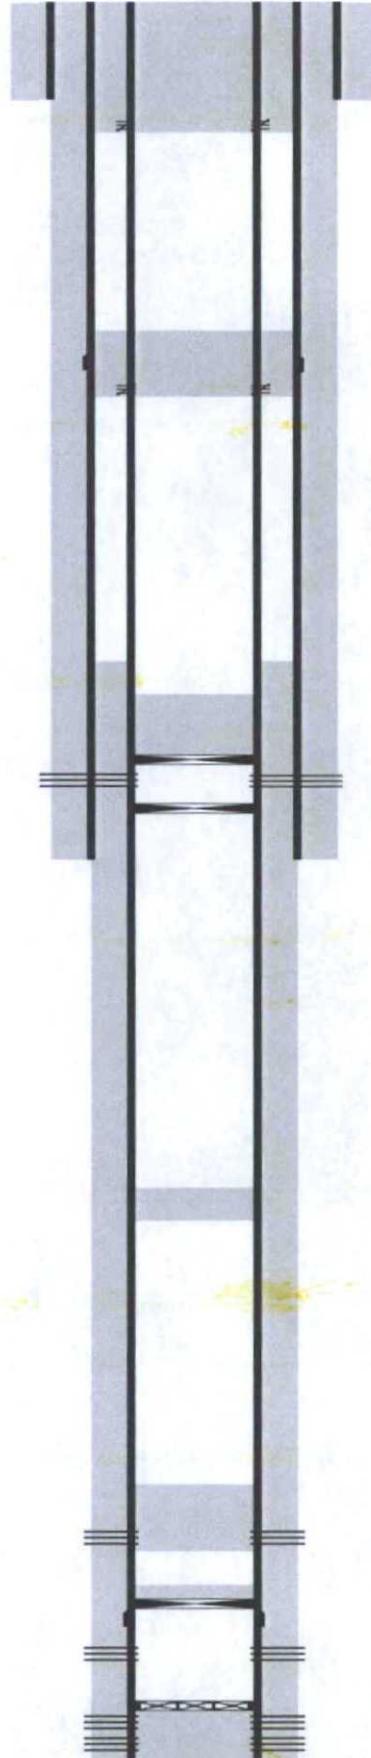

17-1/4" hole @ 419'
13-3/8" csg @ 419'
w/ 415sx-TOC-Surf-Circ

Perf @ 469'

Perf @ 1653'

12-1/2" hole @ 3449'
9-5/8" csg @ 3449'
DVT @ 1603'
1st w/ 928sx-TOC-1600'-Circ
2nd w/ 900sx-TOC-Surf-Circ

Perfs @ 3135-3165'

8-3/4" hole @ 7100'
7" csg @ 7100'
DVT @ 6498'
1st w/ 85sx-TOC-6495'-Circ
2nd w/ 650sx-TOC-2620'-TS


Perfs @ 6231-6296''

Perfs @ 6752-6890'

Perfs @ 6940-7052'

TD-7100'

OXY USA Inc. - Current
Learcy McBuffington #9
API No. 30-025-11570

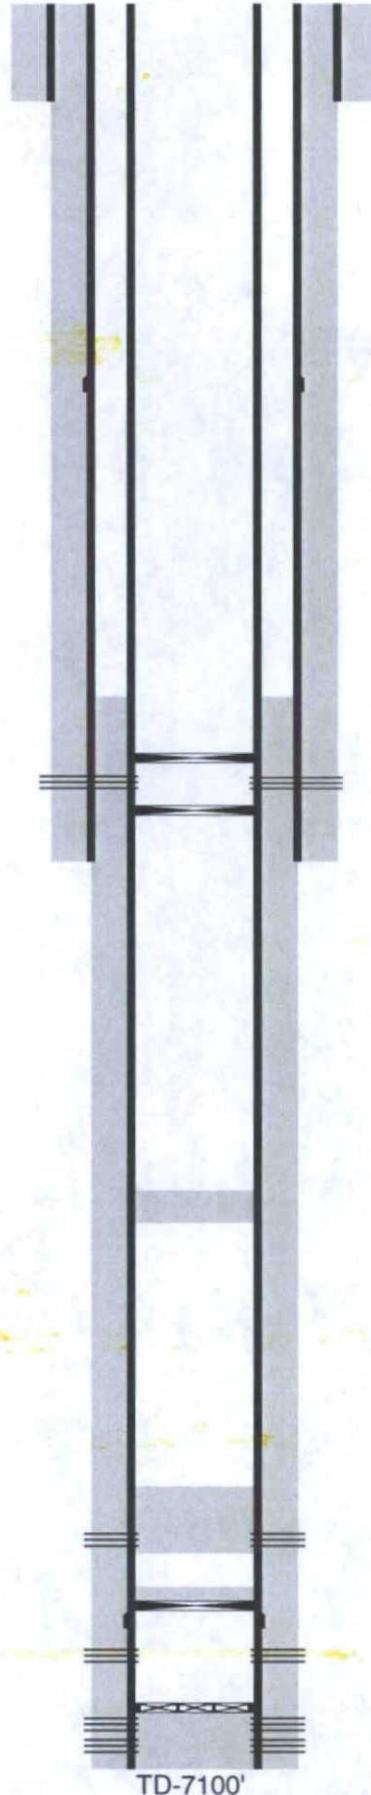

17-1/4" hole @ 419'
13-3/8" csg @ 419'
w/ 415sx-TOC-Surf-Circ

1/09 - CIBP @ 3030'

CIBP @ 3298'

12-1/2" hole @ 3449'
9-5/8" csg @ 3449'
DVT @ 1603'
1st w/ 928sx-TOC-1600'-Circ
2nd w/ 900sx-TOC-Surf-Circ

Perfs @ 3135-3165'

25sx @ 5045-4900'

25sx @ 6277-6127'

CIBP @ 6465 w/ 2sx cmt

8-3/4" hole @ 7100'
7" csg @ 7100'
DVT @ 6498'
1st w/ 85sx-TOC-6495'-Circ
2nd w/ 650sx-TOC-2620'-TS

Perfs @ 6231-6296"

CR, sqz 25 sx cmt

Perfs @ 6752-6890'

Perfs @ 6940-7052'

TD-7100'