

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9770
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico

Form C-101
Revised July 18, 2013

RECEIVED

Energy Minerals and Natural Resources

HOBBSCOCD

Oil Conservation Division

☐ AMENDED REPORT

AUG 29 2013

1220 South St. Francis Dr.

DEC 03 2015

HOBBSCOCD

Santa Fe, NM 87505

RECEIVED

APPLICATION FOR PERMIT TO DRILL, RE-ENTER, DEEPEN, PLUGBACK, OR ADD A ZONE

Operator Name and Address BTA OIL PRODUCERS, LLC. 104 SOUTH PECOS MIDLAND, TEXAS 79701		OGRID Number 260297
Property Code 305307		API Number 30-025-40312
Property Name Eagle JV-P		Well No. 2

Surface Location

UL - Lot F	Section 12	Township 10S	Range 33E	Lot Idn	Feet from 1650'	N/S Line NORTH	Feet From 1650'	E/W Line WEST	County LEA
---------------	---------------	-----------------	--------------	---------	--------------------	-------------------	--------------------	------------------	---------------

Proposed Bottom Hole Location

UL - Lot	Section	Township	Range	Lot Idn	Feet from	N/S Line	Feet From	E/W Line	County
----------	---------	----------	-------	---------	-----------	----------	-----------	----------	--------

Pool Information

Pool Name LANE-SAN ANDRES	Pool Code 37000
------------------------------	--------------------

Additional Well Information

Work Type P	Well Type O	Cable/Rotary WELL SERVICE UNIT	Lease Type S	Ground Level Elevation 4219'
Multiple NO	Proposed Depth 7180'	Formation SAN ANDRES	Contractor UNKNOWN	Spud Date WHEN APPROVED
Depth to Ground water 39'		Distance from nearest fresh water well 1000'+		Distance to nearest surface water 1000'+

☒ We will be using a closed-loop system in lieu of lined pits

Proposed Casing and Cement Program

Type	Hole Size	Casing Size	Casing Weight/ft	Setting Depth	Sacks of Cement	Estimated TOC
Surface	17 1/2"	13 3/8"	54.5#	505'	675 Sx.	SURFACE
Intermed.	12 1/2"	9 5/8"	40#	4008'	1220 Sx.	SURFACE
Prod.	8 3/4"	7"	29#	9153'	980 Sx.	5157' by CBL

Casing/Cement Program: Additional Comments

SEE ATTACHED SHEET.

Proposed Blowout Prevention Program

Type	Working Pressure	Test Pressure	Manufacturer
Ram	3000	1500	Shaffer or Cameron

I hereby certify that the information given above is true and complete to the best of my knowledge and belief.
I further certify that I have complied with 9.15.14.9 (A) NMAC ☐ and/or 19.15.14.9 (B) NMAC ☐, if applicable.

Signature: Joe T. Janica

Printed name: Joe T. Janica

Title: Permit Eng.

E-mail Address: joejanica@valornet.com

Date: 08/29/13

Phone: 575-391-8503

OIL CONSERVATION DIVISION

Approved By:

Title:

Approved Date: 08/30/13

Expiration Date: 08/30/15

Conditions of Approval Attached

SEP 03 2013

DEC 15 2015

Procedure:

1. MI & RU pulling unit.
2. Unseat pump and pull out of hole with rods and pump.
3. ND WH. NU BOP. Release TAC. Pull out of the hole with tubing and lay down excess tubing.
4. MI & RU Wireline truck. Run in hole with gauge ring for 7" 29# casing to liner top.
5. Run in hole with CIBP for 7" 29# Casing. Set CIBP at +/- 7180'. Cap with 40' cement.
6. Run in hole with open ended tubing to +/- 5000'. Load hole with clean water. Circulate hole clean.
7. Pull out of hole with tubing.
8. MI & RU Wireline truck. Run in hole with cement squeeze gun. Perf for cement squeeze at 4960'. Pull out of hole with wireline.
9. Run in hole with retrievable packer for 7" 29# casing. Set packer at 4880'. Pressure up on perfs and establish an injection rate. Open casing valve and determine if there is circulation.
10. Release packer and pull out of hole.
11. Pick up cement retainer for 7" 29# casing. Run in hole. Set retainer @ +/- 4880'.
12. MI & RU Rising Star Services. Mix and pump 250 sx Class with 0.3% C-16A, 0.2% C-37, 0.25% R-38 cement. After pumping 200 sx with casing valve open, close valve and continue pumping remaining cement after pumping 50 sx. Attempt to get a squeeze pressure of 1000 psi.
13. Pull out of retainer, reverse out any remaining cement. Pull out of hole with tubing and stinger.
14. Pick up 6" bit, 6 - drill collars, run in hole on tubing. Rig up reverse unit and swivel. Drill out cement retainer and cement. Pressure test squeeze to 1000 psi. If squeeze holds go to step 15 if squeeze leaks off prep to re-squeeze. Circulate hole with clean water.
15. Raise end of tubing to 4656'; spot 200 gallons 10% acetic acid at 4656'.
16. MI & RU Wireline truck. Run in hole with perf gun load with premium charges with 1 JSPF. Perf per attached schedule. Correlate to Hole log dated 1/21/12. Pull out of hole with wireline.
17. Pick up retrievable packer for 7" 29# casing on tubing. Run in hole. Set packer +/- 4500'.
18. Breakdown perfs and displace acid with pressure. Displace acid.
19. Swab back load to evaluate. Depending on results prepare for a 2500 gallon 15% NEFE acid treatment. Pump acid at 5 - 6 BPM rate with the maximum pressure of 6000 psi with 1000 psi on backside. Flush to perfs.
20. Flow and swab back load to evaluate.
21. Additional program will follow depending on results.


WELL BORE SKETCH

OPERATOR/LEASE/WELL BTA OIL PRODUCERS, LLC 88606 JV-P EAGLE

DATE _____

FIELD/POOL LANE / SAN ANDRES

PLUG BACK DEPTH 7180' KB _____ ELEVATION 4219 GL

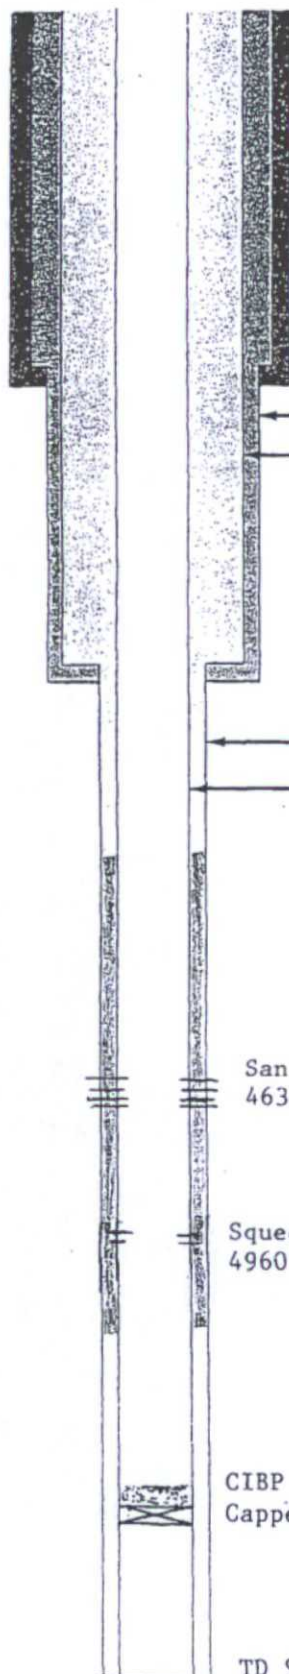

Hole Size 17 1/2"

SURFACE CASING:

Size 13 3/8" Weight 54.5# Grade J-55
Set at 505' with 675 Sx. Sacks Cement
Circulate to surface Sacks to Surface
Remarks: _____

Hole Size 12 1/2"

INTERMEDIATE CASING:

Size 9 5/8" Weight 40# Grade J-55
Set at 4008' with 1220 Sx. Sacks Cement
Circulate to surface Sacks to Surface
Cement Top: Calculated _____ Temperature Survey _____
Remarks: _____

Hole Size 8 3/4"

PRODUCTION CASING:

Size 7" Weight 29# Grade P-110
Set at 9153' with 980 Sx. Sacks Cement
Cement Top: Calculated _____ Temperature Survey _____
Remarks: Top of cement by CBL 5157'

TUBING:

Size _____ Weight _____ Grade _____
Number of Joints _____ Set at _____
Packer Set at _____
Bottom Arrangement: _____

RODS:

Size _____ Number _____
Gas Anchor Set at _____
Pump Set at _____
Arrangement: _____

San Andres perfs;
4632-4656 25 shots

Squeeze perfs
4960' with 250 Sx.

CIBP SET @ 7180'±
Capped/40' of cement

TD 9153'

District I
1625 N. French Dr., Hobbs, NM 88240
Phone: (575) 393-6161 Fax: (575) 393-0720
District II
811 S. First St., Artesia, NM 88210
Phone: (575) 748-1283 Fax: (575) 748-9720
District III
1000 Rio Brazos Road, Aztec, NM 87410
Phone: (505) 334-6178 Fax: (505) 334-6170
District IV
1220 S. St. Francis Dr., Santa Fe, NM 87505
Phone: (505) 476-3460 Fax: (505) 476-3462

State of New Mexico
Energy, Minerals & Natural Resources Department
OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

HOBBS OCD

AUG 29 2013

RECEIVED

Form C-102
Revised August 1, 2011
Submit one copy to appropriate
District Office

☐ AMENDED REPORT

WELL LOCATION AND ACREAGE DEDICATION PLAT

¹ API Number 30-025-40312	² Pool Code 37000	³ Pool Name LANE-SAN ANDRES
⁴ Property Code 305307	⁵ Property Name <i>Eagle 88806 JV-P EAGLE</i>	⁶ Well Number 2
⁷ OGRID No. 260297	⁸ Operator Name BPA OIL PRODUCERS, LLC 104 SOUTH PECOS MIDLAND, TEXAS 79701	⁹ Elevation 4219' GL

¹⁰ Surface Location

UL, or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County
F	12	10S	R33E		1650'	NORTH	1650'	WEST	LEA

¹¹ Bottom Hole Location If Different From Surface

UL, or lot no.	Section	Township	Range	Lot Idn	Feet from the	North/South line	Feet from the	East/West line	County

¹² Dedicated Acres 40	¹³ Joint or Infill	¹⁴ Consolidation Code	¹⁵ Order No.
-------------------------------------	-------------------------------	----------------------------------	-------------------------

No allowable will be assigned to this completion until all interests have been consolidated or a non-standard unit has been approved by the division.

	<p>¹⁶ OPERATOR CERTIFICATION</p> <p>I hereby certify that the information contained herein is true and complete to the best of my knowledge and belief, and that this organization either owns a working interest or undivided mineral interest in the land including the proposed bottom hole location or has a right to drill this well at this location pursuant to a contract with an owner of such a mineral or working interest, or is a voluntary pooling participant or a compulsory pooling participant hereunder.</p> <p><i>Joe T. Janica</i> Signature 08/29/13 Date</p> <p>Joe T. Janica Printed Name</p> <p>joejanica@valornet.com E-mail Address</p>
	<p>¹⁷ SURVEYOR CERTIFICATION</p> <p>I hereby certify that the well location shown on this plat was plotted from field notes of actual surveys made by me or under my supervision, and that the same is true and correct to the best of my belief.</p> <p>Date of Survey</p> <p>Signature and Seal of Professional Surveyor:</p>
	<p>Certificate Number</p>

SEP 03 2013