

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised August 1, 2011

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO. 30-025-23803
5. Indicate Type of Lease STATE ☒ FEE ☐
6. State Oil & Gas Lease No.
7. Lease Name or Unit Agreement Name STATE SWB
8. Well Number 001
9. OGRID Number 162683
10. Pool name or Wildcat WILDCAT

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-104) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☒ Gas Well ☒ Other ☐

2. Name of Operator
CIMAREX ENERGY CO. OF COLORADO

3. Address of Operator
600 N. MARIENFELD, SUITE 600, MIDLAND, TEXAS 79701

4. Well Location

Unit Letter N : 660 feet from the SOUTH line and 2130 feet from the WEST line
Section 25 Township 10S Range 32E NMPM LEA County

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
4,306' - GR

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☒
TEMPORARILY ABANDON ☐ CHANGE PLANS ☐
PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐
DOWNHOLE COMMINGLE ☐

OTHER: ☐

INT TO PA ☒
P&A NR ☐ P&A R ☐
RBDMS ☐ TA ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

- 1) SET 4-1/2" CIBP @ 9,150'; PUMP 75 SXS. CMT. @ 9,150'-8,475' (T/WC); CIRC. WELL W/ PXA MUD. - Pressure test csg.
- 2) PERF. X ATTEMPT TO SQZ. 60 SXS. CMT. 7,490'-7,320' (T/ABO); WOC X TAG CMT. PLUG.
- 3) PERF. X ATTEMPT TO SQZ. 55 SXS. CMT. @ 5,190'-5,040' (T/GLOR.).
- 4) CUT X PULL 4-1/2" CSG. @ 3,740'.
- 5) PUMP 55 SXS. CMT. @ 3,790'-3,616' (4-1/2" CSG. CUT, 8-5/8" CSG. SHOE, T/S.A.); WOC X TAG CMT. PLUG.
- 6) PUMP 45 SXS. CMT. @ 2,547'-2,427' (T/YATES, B/SALT/ANY.); WOC X TAG CMT. PLUG.
- 7) PUMP 40 SXS. CMT. @ 1,825'-1,715' (T/SALT/ANY.); WOC X TAG CMT. PLUG.
- 8) PUMP 35 SXS. CMT. @ 447'-347' (12-3/4" CSG. SHOE); WOC X TAG CMT. PLUG.
- 9) MIX X CIRC. TO SURF. 20 SXS. CMT. @ 63-3' 60'
- 10) DIG OUT X CUT OFF WELLHEAD 3' B.G.L.; WELD ON STEEL PLATE TO CSGS. X INSTALL DRY HOLE MARKER.

DURING THIS PROCEDURE WE PLAN TO USE THE CLOSED-LOOP SYSTEM W/ A STEEL TANK AND HAUL CONTENTS TO THE REQUIRED DISPOSAL, PER OCD RULE 19.15.17.

Spud Date:

NOTIFY OCD 24 HOURS PRIOR TO BEGINNING
PLUGGING OPERATIONS

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

TITLE: AGENT

DATE: 01/12/16

Type or print name: DAVID A. EYLER

E-mail address: DEYLER@MILAGRO-RES.COM PHONE: 432.687.3033

For State Use Only

APPROVED BY:

TITLE: Petroleum Eng. Specialist

DATE: 01/14/2016

Conditions of Approval (if any):

JAN 14 2016



KB - 11' above GL

Cimarex Energy Co. of Colorado

State SWB 1

2130' FWL 660' FSL

Sec. 25, T-10-S, R-32-E, Lea Co., NM

API #30-025-23803

HOBBS OCD

JAN 14 2016

RECEIVED

12 3/4" csg @ 397'

cmt'd w/ 375 sxs class H. Cmt circulated.

8-5/8" 24 & 32# csg @ 3740'

cmt'd w/ 375 sx Class C

Quantity	Description	Length	Setting Depth
272	2-3/8" 4.7# N-80 8rd EUE Tubing	8769.41	8780.41
1	4 1/2" x 2 3/8" TAC	2.90	8783.31
10	2-3/8" 4.7# N-80 8rd EUE Tubing	324.85	9108.16
1	2 3/8" API cup type seat nipple	1.10	9109.26
1	2 3/8" x 4' perf sub	4.10	9113.36
1	2 3/8" 4.7# N-80 mud joint	31.33	9144.69
1	2 3/8" bull plug	0.50	9145.19

Scab Liner 9230'-9272'

Perfs: 9214-49', 9345-90'

PBTD @ 9440, Howco bridge plug left in hole below scab liner

4 1/2", 11.6#N80 LCT @ 10141' cmt'd w/ 500 sx
TD @ 10141'


CIMAREX

HOBBS OCD

Cimarex Energy Co. of Colorado
State SWB 1
2130' FWL 660' FSL
Sec. 25, T-10-S, R-32-E, Lea Co., NM
API #30-025-23803

KB - 11' above GL

T/SALT/ANHY. ~ 1,770'
B/SALT/ANHY ~ 2,487'
T/YATES ~ 2,487'
T/S.A. ~ 3,666'
T/GLOR. ~ 5,115'
T/ABO ~ 7,420'
T/W.C. ~ 8,525'

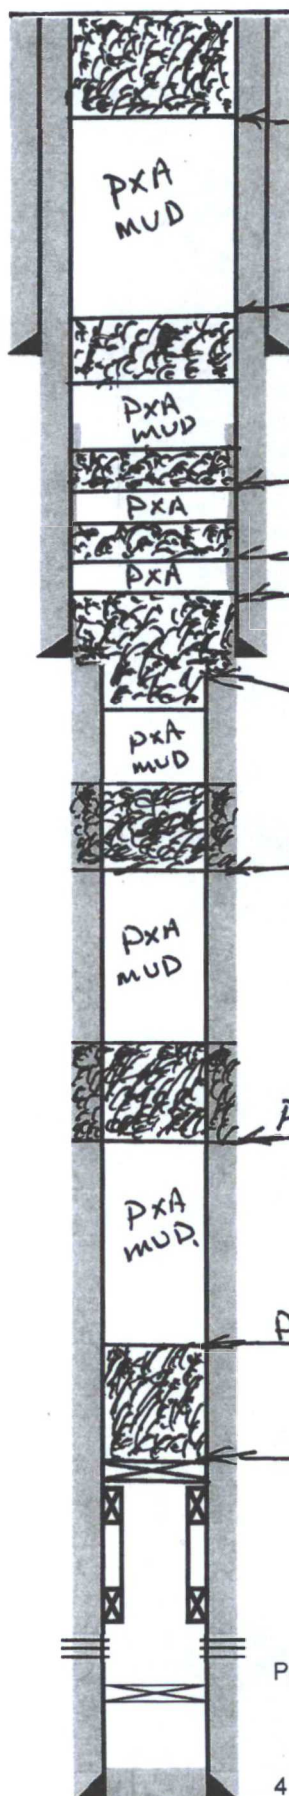

CIRC. 20 SXS. @ 63'-3'

Pump 35 SXS. @ 447'-347' - TAG

12 3/4" csg @ 397'
cmt'd w/ 375 sxs class H. Cmt circulated.

Pump 40 SXS. @ 1825'-1715' - TAG

Pump 45 SXS. @ 2547'-2427' - TAG

Pump 55 SXS. @ 3790'-3616' - TAG

8-5/8" 24 & 32# csg @ 3740'
cmt'd w/ 375 sx Class C

CUT X PULL 4-1/2" CSG. @ +/- 3740'

PERF X SQZ. 55 SXS. @ 5190'-5040'

PERF. X SQZ. 60 SXS. @ 7490'-7320' - TAG

Pump 75 SXS. @ 9150'-8475'

SET 4 1/2" ODBP @ 9150'

Scab Liner 9230'-9272'

Perfs: 9214-49', 9345-90'
PBSD @ 9440, Howco bridge plug left in hole below scab liner

4 1/2", 11.6#N80 LCT @ 10141' cmt'd w/ 500 sx
TD @ 10141'

JAE 01/17/16