

Submit 1 Copy To Appropriate District Office
District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION
1220 South St. Francis Dr.
Santa Fe, NM 87505

SUNDRY NOTICES AND REPORTS ON WELLS (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)		WELL API NO. 30-025-22254 ✓
1. Type of Well: Oil Well <input checked="" type="checkbox"/> Gas Well <input type="checkbox"/> Other <input type="checkbox"/>		5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>
2. Name of Operator OXY USA Inc. ✓		6. State Oil & Gas Lease No.
3. Address of Operator P.O. Box 50250 Midland, TX 79710		7. Lease Name or Unit Agreement Name Saltmount ✓
4. Well Location Unit Letter <u>D</u> : <u>660</u> feet from the <u>South</u> line and <u>1980</u> feet from the <u>east</u> line Section <u>21</u> Township <u>23S</u> Range <u>37E</u> NMPM County <u>Lea</u> ✓		8. Well Number <u>2</u> ✓
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3306.5		9. OGRID Number 16696
		10. Pool name or Wildcat Teague Paddock Blinbury

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>
DOWNHOLE COMMINGLE <input type="checkbox"/>	
CLOSED-LOOP SYSTEM <input type="checkbox"/>	
OTHER: <input type="checkbox"/>	

INT TO PA PA
P&A NR PA P&A R PA
RBDMS PA TA PA

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15. NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-6396' PBTD-5300' Perfs-5160-5190' CIBP-5300'
9-5/8" 32.3# csg @ 1066' w/ 450sx, 12-1/2" hole, TOC-Surf-Circ
7" 23-26# csg @ 6396' w/ 400sx, 8-3/4" hole, TOC-3729'-Calc
1. RIH & set CIBP @ 5110', M&P 40sx cmt to 4930'
2. Perf @ 3550', sqz 40sx cmt to 3450' WOC-Tag
3. Perf @ 2800', sqz 40sx cmt to 2700' WOC-Tag
4. Perf @ 2375', sqz 40sx cmt to 2275' WOC-Tag
5. Perf @ 1170', sqz 60sx cmt to 1015' WOC-Tag
6. Perf @ 250' sqz 100sx cmt to surface 1120'
10# MLF between plugs
Above ground steel tanks will be utilized

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Sr. Regulatory Advisor DATE 2/4/16

Type or print name David Stewart E-mail address: david_stewart@oxy.com PHONE: 432-685-5717

For State Use Only

APPROVED BY: Mark Whitaker TITLE Petroleum Engr. Specialist DATE 02/09/2016

Conditions of Approval (if any):

FEB 09 2016

OXY USA Inc - Proposed
Saltmount #2
API No. 30-025-22254

100sx @ 250'-Surface

60sx @ 1170-1015' WOC-Tag

40sx @ 2375-2275' WOC-Tag

40sx @ 2800-2700' WOC-Tag


40sx @ 3550-3450' WOC-Tag

CIBP @ 5110' w/ 40sx to 4930'

CIBP @ 5300'

CIBP @ 6100'

PB-6340'

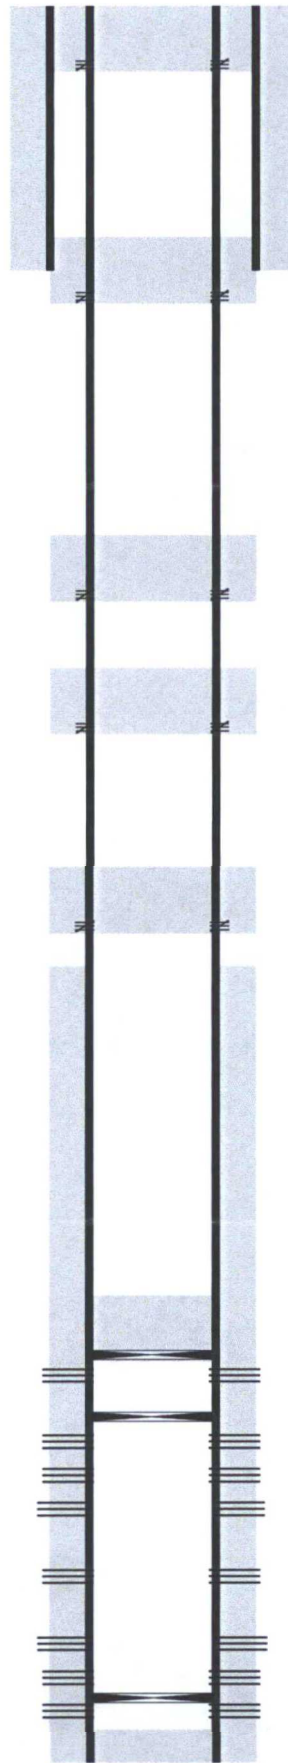

Perf @ 250'

Perf @ 1170'

Perf @ 2375'

Perf @ 2800'

Perf @ 3550'

Perfs @ 5160-5190'

Perfs @ 5356-5559'

Perfs @ 5618-5708' sqz w/ 50sx cmt

Perfs @ 5793-5894'

Perfs @ 6003-6112' sqz w/ 100sx cmt

Perfs @ 6153-6320'

12-1/2" hole @ 1066'
9-5/8" csg @ 1066'
w/ 450sx-TOC-Surf-Circ

8-3/4" hole @ 6396'
7" csg @ 6396'
w/ 400sx-TOC-3729'-Calc

TD-6396'

OXY USA Inc - Current
Saltmount #2
API No. 30-025-22254

12-1/2" hole @ 1066'
9-5/8" csg @ 1066'
w/ 450sx-TOC-Surf-Circ

8-3/4" hole @ 6396'
7" csg @ 6396'
w/ 400sx-TOC-3729'-Calc

CIBP @ 5300'

CIBP @ 6100'

PB-6340'

TD-6396'

Perfs @ 5160-5190'

Perfs @ 5356-5559'

Perfs @ 5618-5708' sqz w/ 50sx cmt

Perfs @ 5793-5894'

Perfs @ 6003-6112' sqz w/ 100sx cmt

Perfs @ 6153-6320'