

Endurance Resources LLC

HALLIBURTON

Sperry Drilling Services

Project: Lea County, NM (NAD 83)
 Site: Tele Delux 32 State
 Well: Tele Delux 32 State 102H
 Wellbore: Wellbore #1
 Design: Plan #1
 Rig: TBD

SURFACE LOCATION



US State Plane 1983
 New Mexico Eastern Zone
 Elevation: GL 3274.4' @ 3274.40usft (TBD)
 Northing 399098.31 Easting 832949.67
 Latitude 32° 5' 37.322 N Longitude 103° 23' 30.021 W

To convert a Magnetic Direction to a Grid Direction, Add 6.58°

Magnetic Model: BGGM2015 Date: 08-Mar-16
 Azimuths to Grid North

WELLBORE TARGET DETAILS (MAP CO-ORDINATES AND LAT/LONG)

Name	TVD	+N/-S	+E/-W	Northing	Easting	Latitude	Longitude
Tele Delux 32 State 102H BHL	9099.00	-4792.75	377.53	394305.56	833327.20	32° 4' 49.865 N	103° 23' 26.119 W

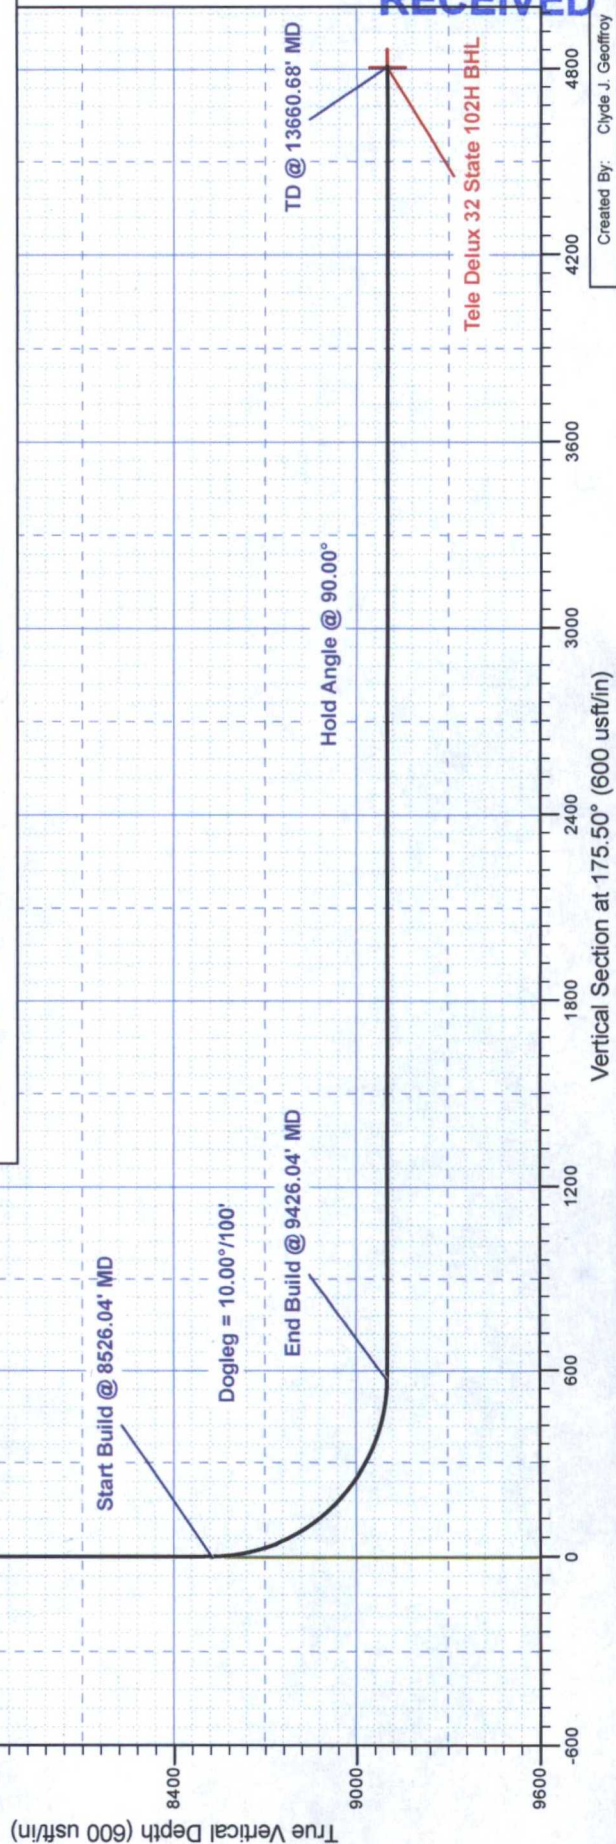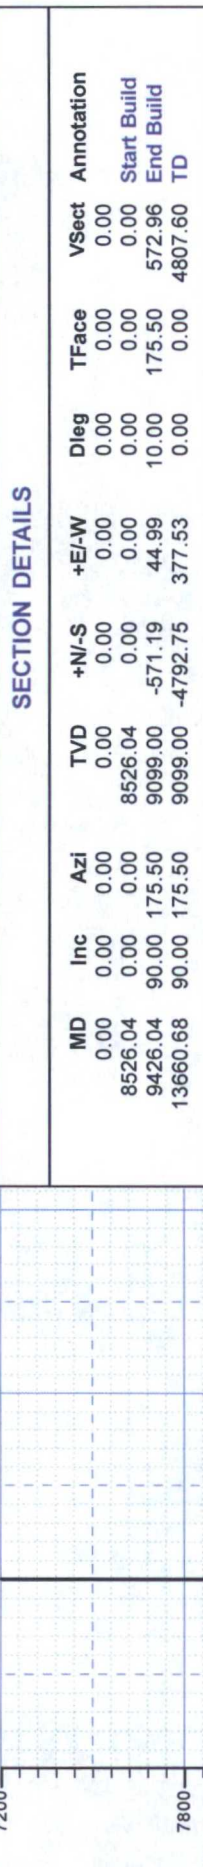

MAR 11 2016

RECEIVED

Created By: Clyde J. Geoffroy

MAR 14 2016

Endurance Resources LLC

HALLIBURTON

Sperry Drilling Services

Project: Lea County, NM (NAD 83)

Site: Tele Delux 32 State

Well: Tele Delux 32 State 102H

Wellbore: Wellbore #1

Plan #1

Rig: TBD


SURFACE LOCATION

US State Plane 1983 New Mexico Eastern Zone			
Elevation: GL 3274.4' @ 3274.40usft (TBD)			
Northing	Easting	Latitude	Longitude
399098.31	832949.67	32° 5' 37.322 N	103° 23' 30.021 W



To convert a Magnetic Direction to a Grid Direction, Add 6.58°

Magnetic Model: BGGM2015 Date: 08-Mar-16
Azimuths to Grid North

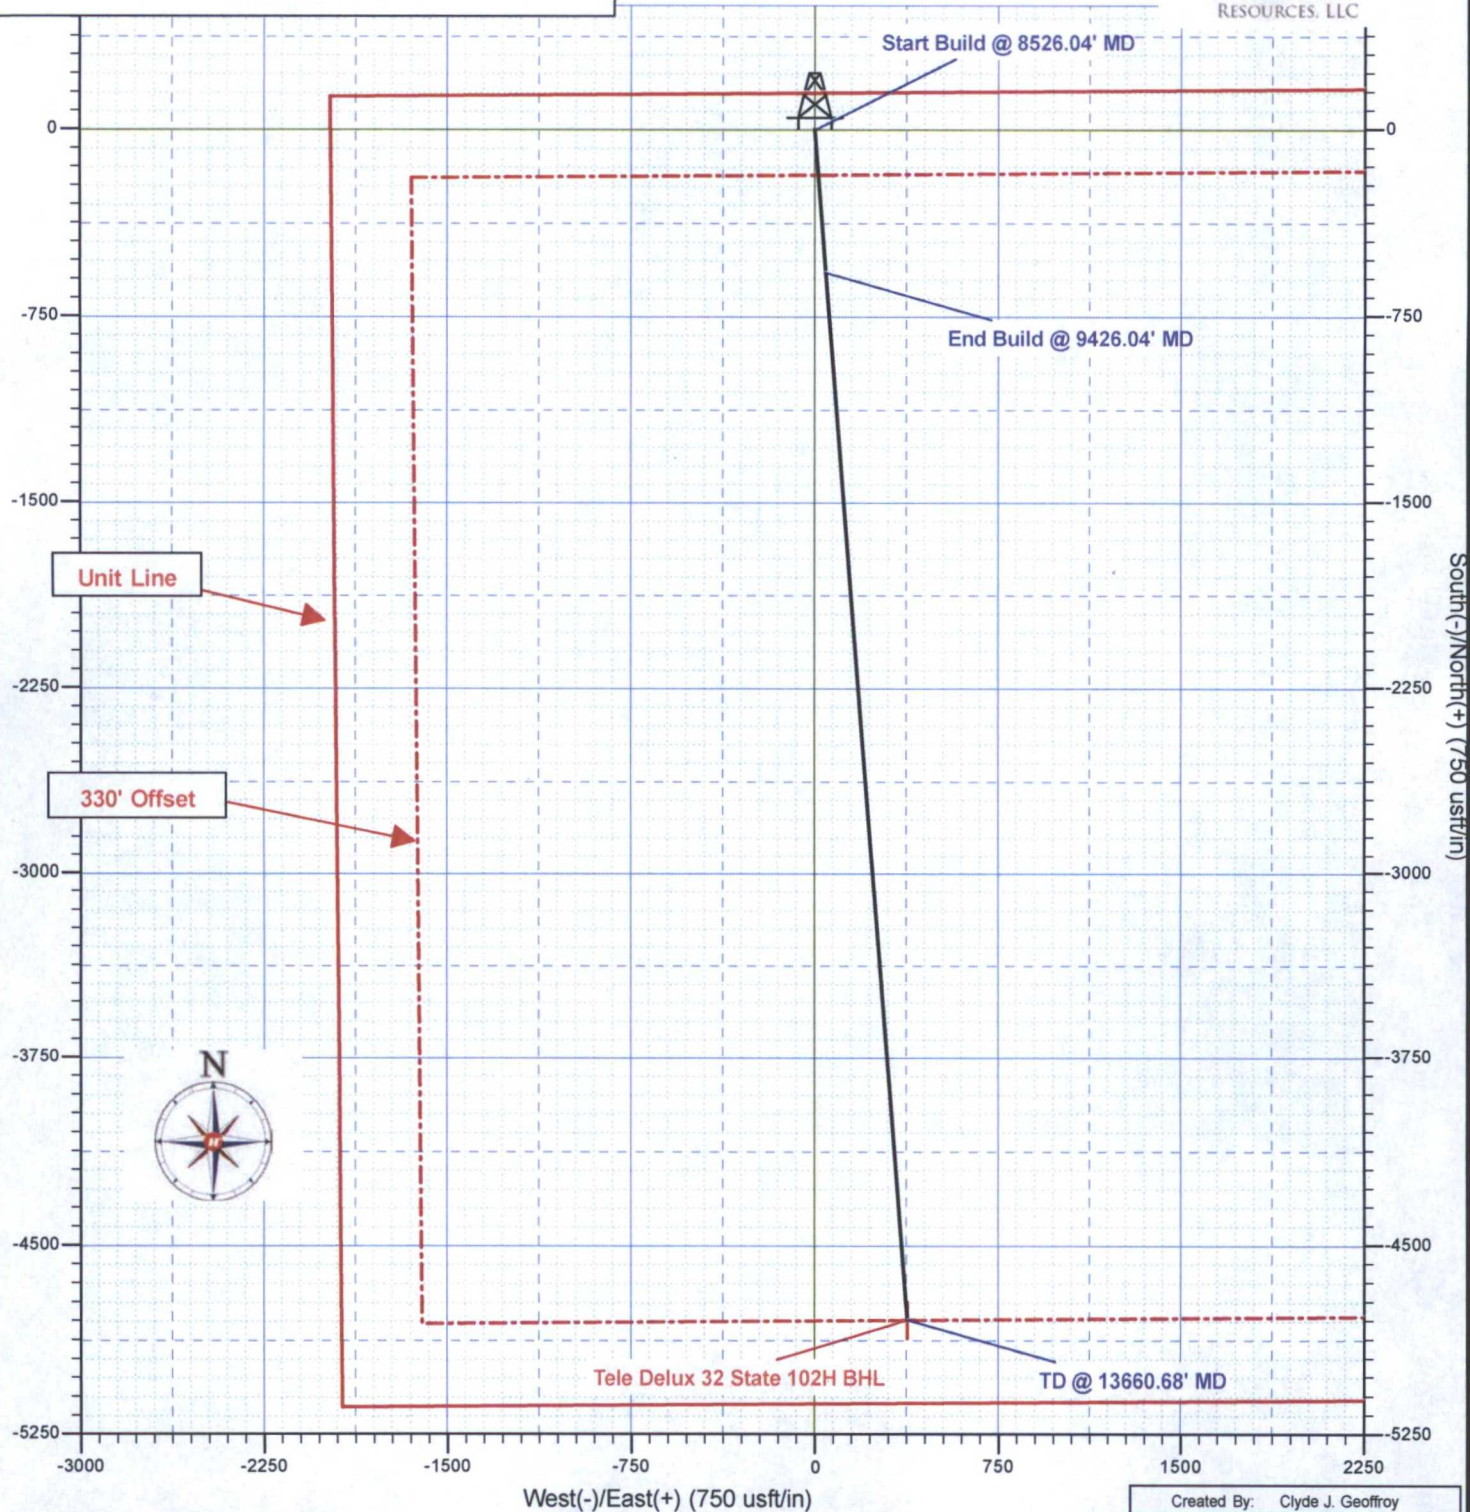

Created By: Clyde J. Geoffroy

Endurance Resources LLC

Lea County, NM (NAD 83)

Tele Delux 32 State

Tele Delux 32 State 102H

Wellbore #1

Plan: Plan #1

Sperry Drilling Services Proposal Report

09 March, 2016

Well Coordinates: 399,098.31 N, 832,949.67 E (32° 05' 37.32" N, 103° 23' 30.02" W)
Ground Level: 3,274.40 usft

Local Coordinate Origin:	Centered on Well Tele Delux 32 State 102H
Viewing Datum:	GL 3274.4' @ 3274.40usft (TBD)
TVDs to System:	N
North Reference:	Grid
Unit System:	API - US Survey Feet

Version: 5000.1 Build: 76

HALLIBURTON

Plan Report for Tele Delux 32 State 102H - Plan #1

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	Toolface Azimuth (°)
0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00	0.00
8,526.04	0.00	0.00	8,526.04	0.00	0.00	0.00	0.00	0.00	0.00	0.00
Start Build @ 8526.04' MD - Dogleg = 10.00°/100'										
8,600.00	7.40	175.50	8,599.79	-4.75	0.37	4.77	10.00	10.00	0.00	175.50
8,700.00	17.40	175.50	8,697.34	-26.12	2.06	26.21	10.00	10.00	0.00	0.00
8,800.00	27.40	175.50	8,789.68	-64.06	5.05	64.26	10.00	10.00	0.00	0.00
8,900.00	37.40	175.50	8,874.01	-117.40	9.25	117.77	10.00	10.00	0.00	0.00
9,000.00	47.40	175.50	8,947.77	-184.53	14.54	185.11	10.00	10.00	0.00	0.00
9,100.00	57.40	175.50	9,008.71	-263.41	20.75	264.23	10.00	10.00	0.00	0.00
9,200.00	67.40	175.50	9,054.99	-351.64	27.70	352.73	10.00	10.00	0.00	0.00
9,300.00	77.40	175.50	9,085.19	-446.55	35.17	447.93	10.00	10.00	0.00	0.00
9,400.00	87.40	175.50	9,098.41	-545.24	42.95	546.92	10.00	10.00	0.00	0.00
9,426.04	90.00	175.50	9,099.00	-571.19	44.99	572.96	10.00	10.00	0.00	0.00
End Build @ 9426.04' MD - Hold Angle @ 90.00°										
9,500.00	90.00	175.50	9,099.00	-644.92	50.80	646.92	0.00	0.00	0.00	0.00
9,600.00	90.00	175.50	9,099.00	-744.61	58.65	746.92	0.00	0.00	0.00	0.00
9,700.00	90.00	175.50	9,099.00	-844.30	66.51	846.92	0.00	0.00	0.00	0.00
9,800.00	90.00	175.50	9,099.00	-943.99	74.36	946.92	0.00	0.00	0.00	0.00
9,900.00	90.00	175.50	9,099.00	-1,043.68	82.21	1,046.92	0.00	0.00	0.00	0.00
10,000.00	90.00	175.50	9,099.00	-1,143.37	90.06	1,146.92	0.00	0.00	0.00	0.00
10,100.00	90.00	175.50	9,099.00	-1,243.07	97.92	1,246.92	0.00	0.00	0.00	0.00
10,200.00	90.00	175.50	9,099.00	-1,342.76	105.77	1,346.92	0.00	0.00	0.00	0.00
10,300.00	90.00	175.50	9,099.00	-1,442.45	113.62	1,446.92	0.00	0.00	0.00	0.00
10,400.00	90.00	175.50	9,099.00	-1,542.14	121.48	1,546.92	0.00	0.00	0.00	0.00
10,500.00	90.00	175.50	9,099.00	-1,641.83	129.33	1,646.92	0.00	0.00	0.00	0.00
10,600.00	90.00	175.50	9,099.00	-1,741.52	137.18	1,746.92	0.00	0.00	0.00	0.00
10,700.00	90.00	175.50	9,099.00	-1,841.21	145.03	1,846.92	0.00	0.00	0.00	0.00
10,800.00	90.00	175.50	9,099.00	-1,940.90	152.89	1,946.92	0.00	0.00	0.00	0.00
10,900.00	90.00	175.50	9,099.00	-2,040.59	160.74	2,046.92	0.00	0.00	0.00	0.00
11,000.00	90.00	175.50	9,099.00	-2,140.29	168.59	2,146.92	0.00	0.00	0.00	0.00
11,100.00	90.00	175.50	9,099.00	-2,239.98	176.45	2,246.92	0.00	0.00	0.00	0.00
11,200.00	90.00	175.50	9,099.00	-2,339.67	184.30	2,346.92	0.00	0.00	0.00	0.00
11,300.00	90.00	175.50	9,099.00	-2,439.36	192.15	2,446.92	0.00	0.00	0.00	0.00
11,400.00	90.00	175.50	9,099.00	-2,539.05	200.00	2,546.92	0.00	0.00	0.00	0.00
11,500.00	90.00	175.50	9,099.00	-2,638.74	207.86	2,646.92	0.00	0.00	0.00	0.00
11,600.00	90.00	175.50	9,099.00	-2,738.43	215.71	2,746.92	0.00	0.00	0.00	0.00
11,700.00	90.00	175.50	9,099.00	-2,838.12	223.56	2,846.92	0.00	0.00	0.00	0.00
11,800.00	90.00	175.50	9,099.00	-2,937.82	231.41	2,946.92	0.00	0.00	0.00	0.00
11,900.00	90.00	175.50	9,099.00	-3,037.51	239.27	3,046.92	0.00	0.00	0.00	0.00
12,000.00	90.00	175.50	9,099.00	-3,137.20	247.12	3,146.92	0.00	0.00	0.00	0.00
12,100.00	90.00	175.50	9,099.00	-3,236.89	254.97	3,246.92	0.00	0.00	0.00	0.00
12,200.00	90.00	175.50	9,099.00	-3,336.58	262.83	3,346.92	0.00	0.00	0.00	0.00
12,300.00	90.00	175.50	9,099.00	-3,436.27	270.68	3,446.92	0.00	0.00	0.00	0.00
12,400.00	90.00	175.50	9,099.00	-3,535.96	278.53	3,546.92	0.00	0.00	0.00	0.00
12,500.00	90.00	175.50	9,099.00	-3,635.65	286.38	3,646.92	0.00	0.00	0.00	0.00
12,600.00	90.00	175.50	9,099.00	-3,735.34	294.24	3,746.92	0.00	0.00	0.00	0.00
12,700.00	90.00	175.50	9,099.00	-3,835.04	302.09	3,846.92	0.00	0.00	0.00	0.00
12,800.00	90.00	175.50	9,099.00	-3,934.73	309.94	3,946.92	0.00	0.00	0.00	0.00
12,900.00	90.00	175.50	9,099.00	-4,034.42	317.80	4,046.92	0.00	0.00	0.00	0.00
13,000.00	90.00	175.50	9,099.00	-4,134.11	325.65	4,146.92	0.00	0.00	0.00	0.00
13,100.00	90.00	175.50	9,099.00	-4,233.80	333.50	4,246.92	0.00	0.00	0.00	0.00
13,200.00	90.00	175.50	9,099.00	-4,333.49	341.35	4,346.92	0.00	0.00	0.00	0.00
13,300.00	90.00	175.50	9,099.00	-4,433.18	349.21	4,446.92	0.00	0.00	0.00	0.00
13,400.00	90.00	175.50	9,099.00	-4,532.87	357.06	4,546.92	0.00	0.00	0.00	0.00
13,500.00	90.00	175.50	9,099.00	-4,632.57	364.91	4,646.92	0.00	0.00	0.00	0.00
13,600.00	90.00	175.50	9,099.00	-4,732.26	372.76	4,746.92	0.00	0.00	0.00	0.00
13,660.68	90.00	175.50	9,099.00	-4,792.75	377.53	4,807.60	0.00	0.00	0.00	0.00
TD @ 13660.68' MD - Tele Delux 32 State 102H BHL										

Plan Report for Tele Delux 32 State 102H - Plan #1

Plan Annotations

Measured Depth (usft)	Vertical Depth (usft)	Local Coordinates		Comment
		+N/-S (usft)	+E/-W (usft)	
8,526.04	8,526.04	0.00	0.00	Start Build @ 8526.04' MD
8,526.04	8,526.04	0.00	0.00	Dogleg = 10.00°/100'
9,426.04	9,099.00	-571.19	44.99	End Build @ 9426.04' MD
9,426.04	9,099.00	-571.19	44.99	Hold Angle @ 90.00°
13,660.68	9,099.00	-4,792.75	377.53	TD @ 13660.68' MD

Vertical Section Information

Angle Type	Target	Azimuth (°)	Origin Type	Origin		Start TVD (usft)
				+N/-S (usft)	+E/-W (usft)	
TD	No Target (Freehand)	175.50	Slot	0.00	0.00	0.00

Survey tool program

From (usft)	To (usft)	Plan #1	Survey/Plan	Survey Tool
0.00	13,660.68	Plan #1		MWD+SC

Targets associated with this wellbore

Target Name	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Shape
Tele Delux 32 State 102H BHL	9,099.00	-4,792.75	377.53	Point

North Reference Sheet for Tele Delux 32 State - Tele Delux 32 State 102H - Wellbore #1

All data is in US Feet unless otherwise stated. Directions and Coordinates are relative to Grid North Reference.

Vertical Depths are relative to GL 3274.4' @ 3274.40usft (TBD). Northing and Easting are relative to Tele Delux 32 State 102H

Coordinate System is US State Plane 1983, New Mexico Eastern Zone using datum North American Datum 1983, ellipsoid GRS 1980

Projection method is Transverse Mercator (Gauss-Kruger)

Central Meridian is -104.33°, Longitude Origin:0° 0' 0.000 E°, Latitude Origin:0° 0' 0.000 N°

False Easting: 541,337.50usft, False Northing: 0.00usft, Scale Reduction: 1.00000649

Grid Coordinates of Well: 399,098.31 usft N, 832,949.67 usft E

Geographical Coordinates of Well: 32° 05' 37.32" N, 103° 23' 30.02" W

Grid Convergence at Surface is: 0.50°

Based upon Minimum Curvature type calculations, at a Measured Depth of 13,660.68usft the Bottom Hole Displacement is 4,807.60usft in the Direction of 175.50° (Grid).

Magnetic Convergence at surface is: -6.58° (8 March 2016, , BGGM2015)

