

Submit 1 Copy To Appropriate District Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised July 18, 2013

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-025-28470	✓
5. Indicate Type of Lease STATE <input type="checkbox"/> FEE <input checked="" type="checkbox"/>	✓
6. State Oil & Gas Lease No.	
7. Lease Name or Unit Agreement Name Byers B	✓
8. Well Number 2	✓
9. OGRID Number 192463	✓
10. Pool name or Wildcat Monument Tubb	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3563	

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well Other

2. Name of Operator
OXY USA WTP Limited Partnership ✓

3. Address of Operator
P.O. Box 50250 Midland, TX 79710

4. Well Location
 Unit Letter G : 2080 feet from the North line and 1980 feet from the east line ✓
 Section 7 Township 20S Range 38E NMPM County Lea

HOBBS OCD
MAR 18 2016
RECEIVED

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input checked="" type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	INT TO PA <input checked="" type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P&A NR <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	P&A R <input type="checkbox"/>
DOWNHOLE COMMINGLE <input type="checkbox"/>			
CLOSED-LOOP SYSTEM <input type="checkbox"/>			
OTHER: <input type="checkbox"/>		OTHER: <input type="checkbox"/>	

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

TD-7100' PBDT-6725' Perfs-6401-6599' CIBP-6760'

8-5/8" 24# csg @ 1552' w/ 800sx, 12-1/4" hole, TOC-Surf-Circ
 5-1/2" 17# csg @ 7100' w/ 2200sx, 7-7/8" hole, TOC-Surf-Circ

1. RIH & set CIBP @ 6351', M&P 25sx cmt
 2. RIH & set CIBP @ 5840', M&P 25sx cmt
 3. M&P 25sx cmt @ 4730-4580' WOC-Tag
 4. M&P 25sx cmt @ 3620-3470' WOC-Tag
 5. M&P 25sx cmt @ 2800-2650' WOC-Tag
 6. M&P 25sx cmt @ 1605-1455' WOC-Tag
 7. M&P 35sx cmt @ 250' to surface
- 10# MLF between plugs
 Above ground steel tanks will be utilized

circulate mud ladm fluid pressure test csg
NOTIFY OCD 24 HOURS PRIOR TO BEGINNING PLUGGING OPERATIONS

Spud Date:

Rig Release Date:

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE David Stewart TITLE Sr. Regulatory Advisor DATE 3/16/16

Type or print name David Stewart E-mail address: david_stewart@oxy.com PHONE: 432-685-5717

For State Use Only

APPROVED BY: Mark Whitaker TITLE Petroleum Engr. Specialist DATE 03/21/2016

Conditions of Approval (if any):

MAR 22 2016


dy

OXY USA WTP LP - Current
Byers B #2
API No. 30-025-28470

12-1/4" hole @ 1552'
8-5/8" csg @ 1552'
w/ 800sx-TOC-Surf-Circ

CIBP @ 6760' w/ 35' cmt

PB-6952'

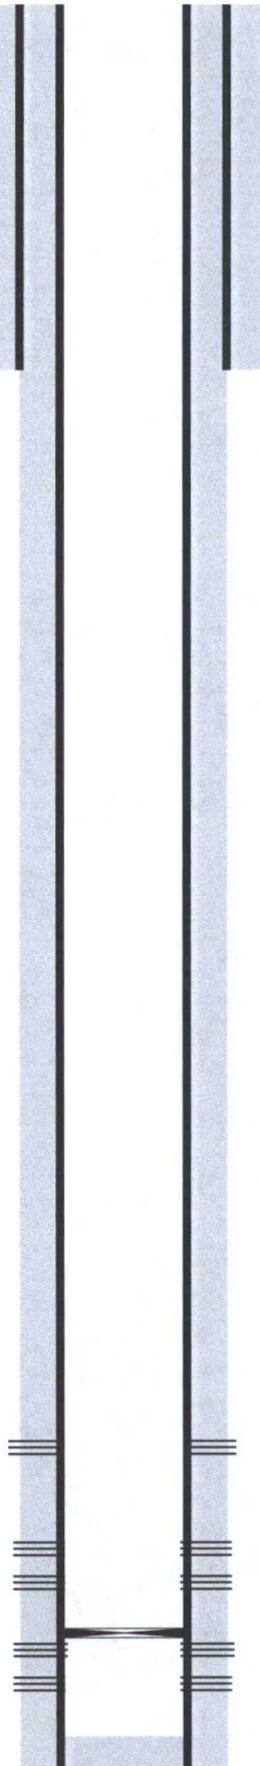

Perfs @ 5889-5963' sqz 250sx cmt

Perfs @ 6401-6599'

Perfs @ 6832-6917'

7-7/8" hole @ 7100'
5-1/2" csg @ 7100'
w/ 2200sx-TOC-Surf-Circ

TD-7100'

OXY USA WTP LP - Proposed
Byers B #2
API No. 30-025-28470

35sx @ 250'-Surface

25sx @ 1605-1455' WOC-Tag

25sx @ 2800-2650' WOC-Tag

25sx @ 3620-3470' WOC-Tag


25sx @ 4730-4580' WOC-Tag

CIBP @ 5840' w/ 25sx

CIBP @ 6351' w/ 25sx

CIBP @ 6760' w/ 35' cmt

PB-6952'

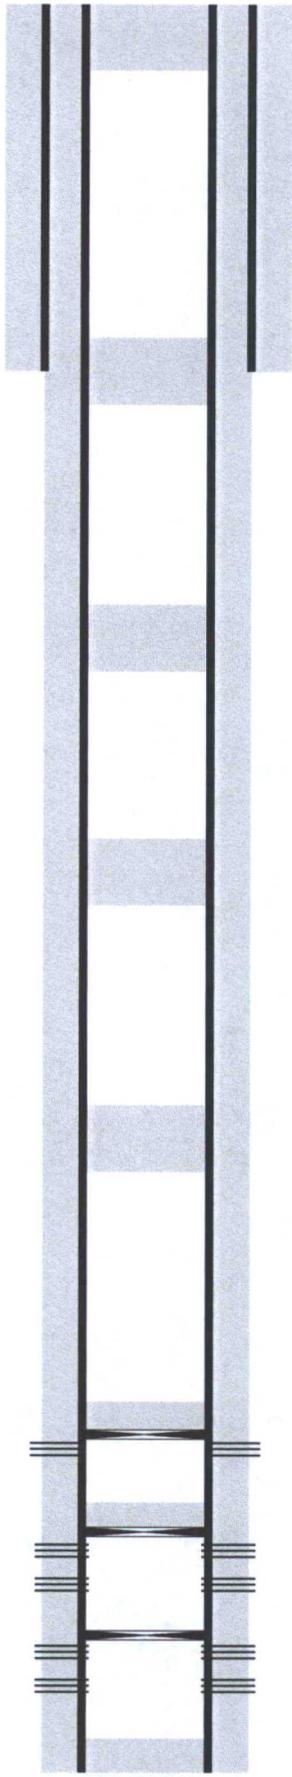

12-1/4" hole @ 1552'
8-5/8" csg @ 1552'
w/ 800sx-TOC-Surf-Circ

Perfs @ 5889-5963' sqz 250sx cmt

Perfs @ 6401-6599'

Perfs @ 6832-6917'

7-7/8" hole @ 7100'
5-1/2" csg @ 7100'
w/ 2200sx-TOC-Surf-Circ

TD-7100'