


13-5/8" 3M BOPE & Closed Loop Equipment Schematic

HOBBS OCD

APR 29 2016

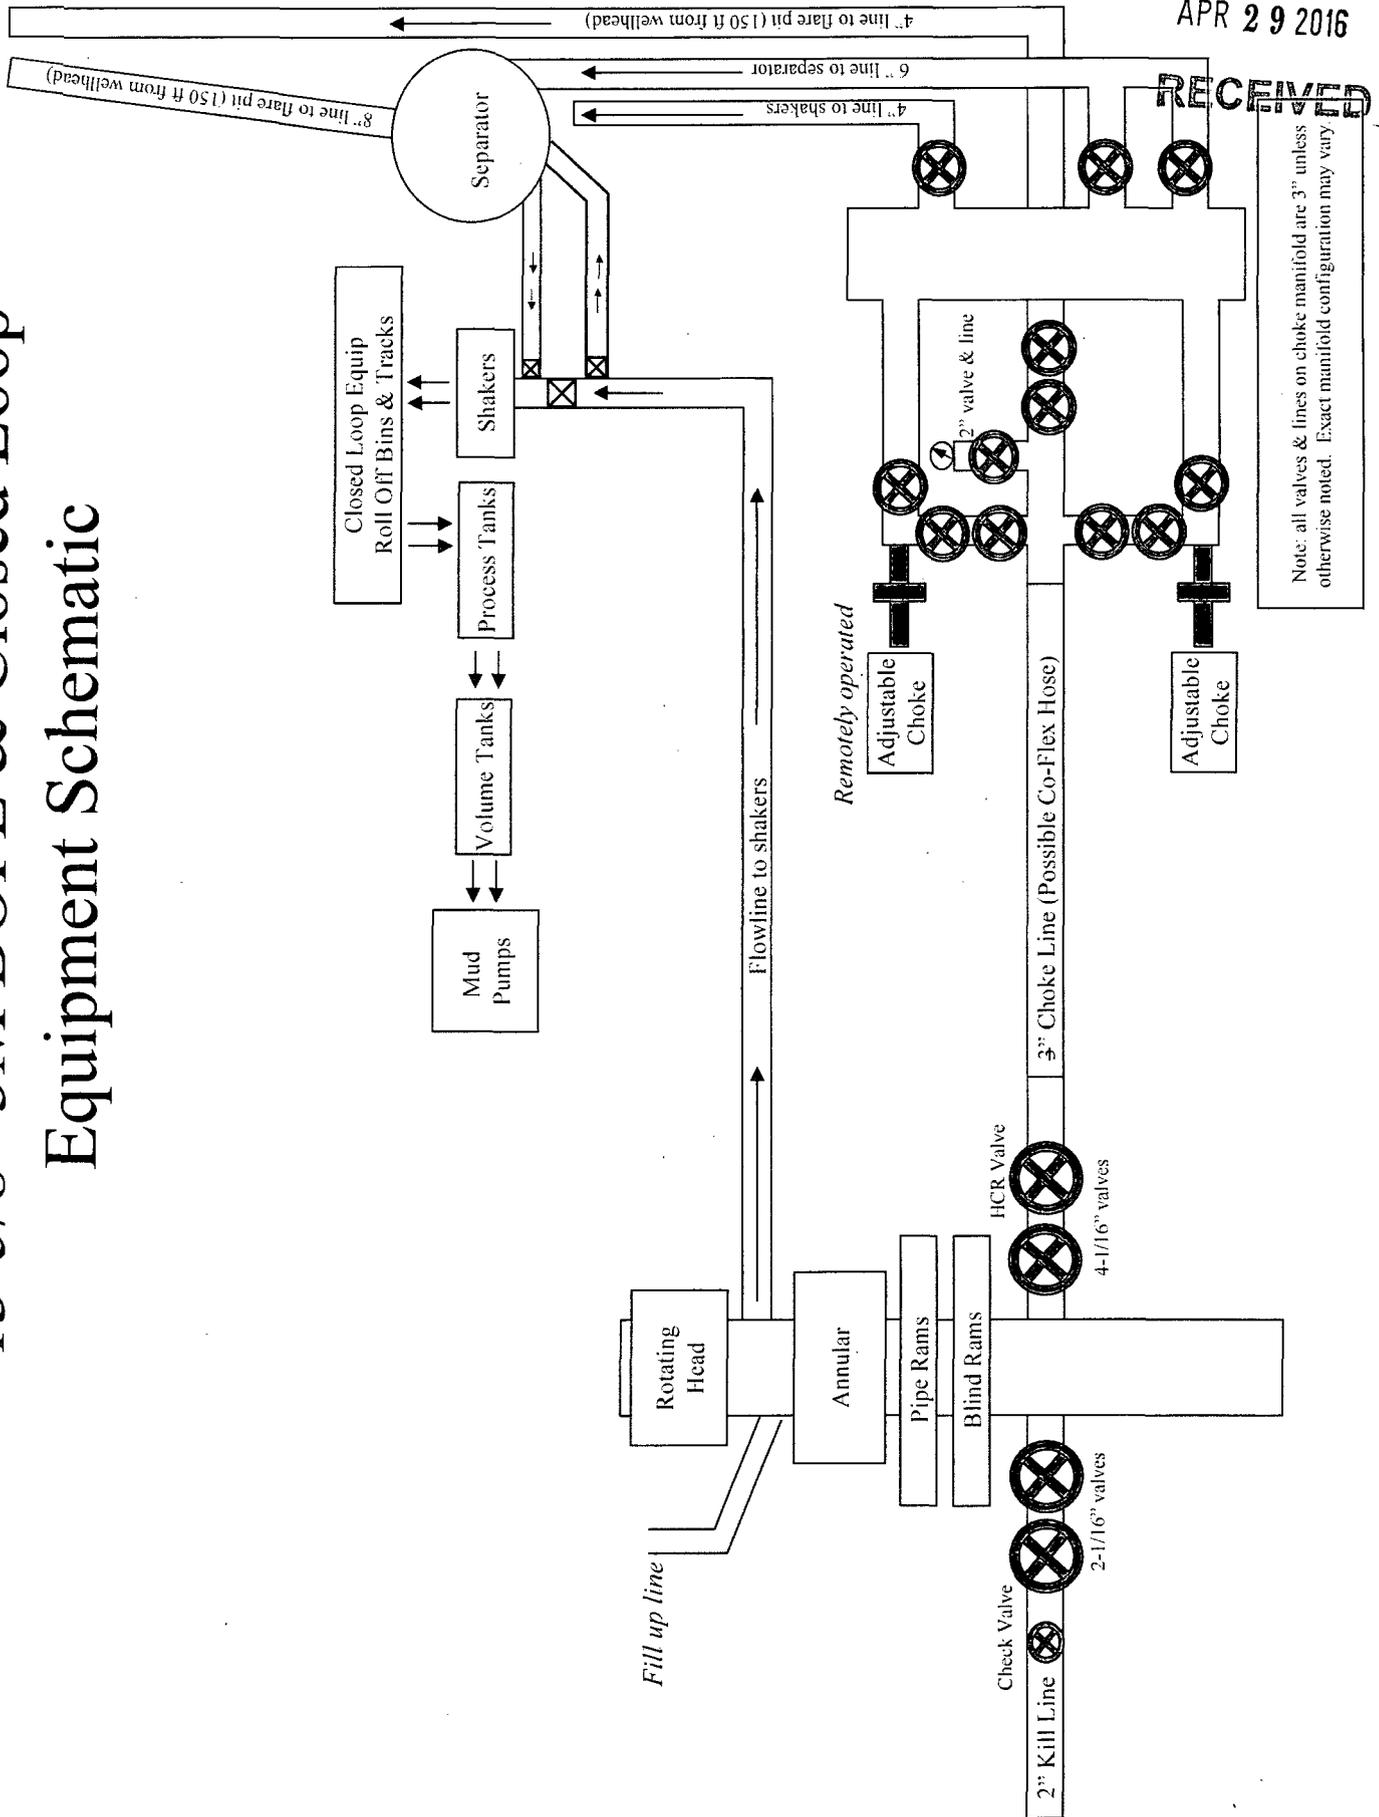


MAY 03 2016

NOTES REGARDING BLOWOUT PREVENTERS

Devon Energy Production Company, L.P.
BELL LAKE 24 FED 6H

1. Drilling Nipple will be constructed so it can be removed mechanically without the aid of a welder. The minimum internal diameter will equal BOP bore.
2. Wear ring will be properly installed in head.
3. Blowout preventer and all associated filings will be in operable condition to withstand a minimum of 3000psi working pressure.
4. All fittings will be flanged.
5. A fill bore safety valve tested to a minimum of 3000psi WP with proper thread connections will be available on the rotary rig floor at all times.
6. All choke lines will be anchored to prevent movement.
7. All BOP equipment will be equal to or larger in bore than the internal diameter of the last casing string.
8. Will maintain a kelly cock attached to the kelly.
9. Hand wheels and wrenches will be properly installed and tested for safe operation.
10. Hydraulic floor control for blowout preventer will be located as near in proximity to driller's controls as possible.
11. All BOP equipment will meet API standards and include a minimum 40 gallon accumulator having two independent means of power to initiate closing operation.

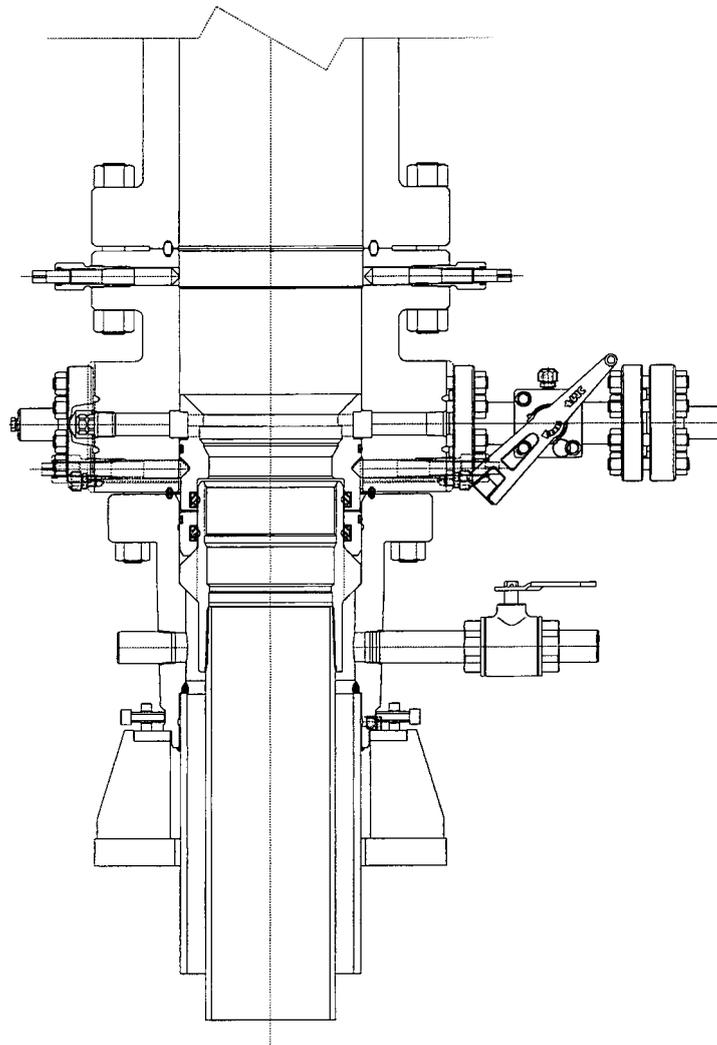


PRIMARY MODE

DEVON ENERGY
ARTESIA
S.E.N.M
 13 3/8 X 9 5/8

QUOTE LAYOUT
 F18648
 REF: DM100161737
 DM100151315

PRIVATE AND CONFIDENTIAL THIS DOCUMENT AND ALL THE INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND EXCLUSIVE PROPERTY OF FMC TECHNOLOGIES AND MAY NOT BE REPRODUCED, USED, DISCLOSED, OR MADE PUBLIC IN ANY MANNER PRIOR TO EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES. THIS DOCUMENT IS ACCEPTED BY RECIPIENT PURSUANT TO AGREEMENT TO THE FOREGOING, AND MUST BE RETURNED UPON DEMAND. MANUFACTURER AGREES THAT ARTICLES MADE IN ACCORDANCE WITH THIS DOCUMENT SHALL BE CONSIDERED FMC TECHNOLOGIES' DESIGN AND THAT IDENTICAL ARTICLES OR PARTS THEREOF SHALL NOT BE MANUFACTURED FOR THE USE OR SALE BY MANUFACTURER OR ANY OTHER PERSON WITHOUT THE PRIOR EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES	REVISIONS	DESCRIPTION	DRAWN BY		FMC Technologies DRAWING NUMBER DM100161771-2A	
	A	05-08-13	SURFACE WELLHEAD LAYOUT UNIHEAD, UH-1,SOW, DEVON ENERGY, ODESSA	K. VU		05-08-13
	B	1-22-14		Z. MARQUEZ		05-08-13
	C	5-13-14		K. TAHA		05-08-13
			APPROVED BY	R. HAMILTON	05-08-13	

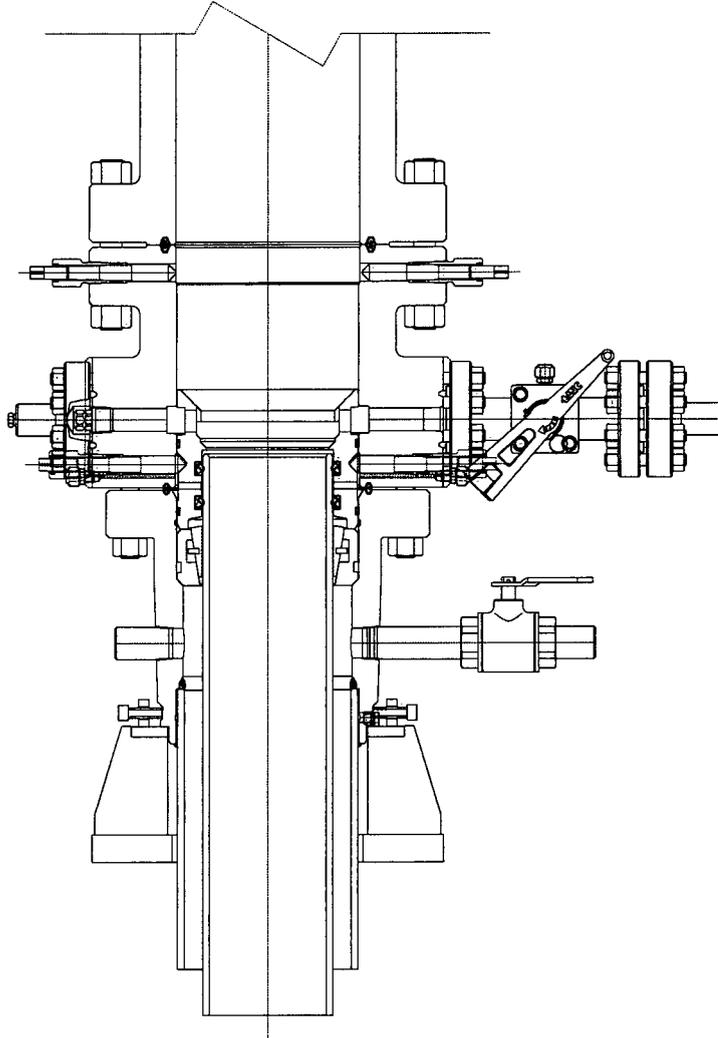

CONTINGENCY MODE

DEVON ENERGY
 ARTESIA
 S.E.N.M
 13 3/8 X 9 5/8

QUOTE LAYOUT
 F18648
 REF: DM100161737
 DM100151315

PRIVATE AND CONFIDENTIAL THIS DOCUMENT AND ALL THE INFORMATION CONTAINED HEREIN ARE THE CONFIDENTIAL AND EXCLUSIVE PROPERTY OF FMC TECHNOLOGIES AND MAY NOT BE REPRODUCED, USED, DISCLOSED, OR MADE PUBLIC IN ANY MANNER PRIOR TO EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES. THIS DOCUMENT IS ACCEPTED BY RECIPIENT PURSUANT TO AGREEMENT TO THE FOREGOING, AND MUST BE RETURNED UPON DEMAND. MANUFACTURER AGREES THAT ARTICLES MADE IN ACCORDANCE WITH THIS DOCUMENT SHALL BE CONSIDERED FMC TECHNOLOGIES' DESIGN AND THAT IDENTICAL ARTICLES OR PARTS THEREOF SHALL NOT BE MANUFACTURED FOR THE USE OR SALE BY MANUFACTURER OR ANY OTHER PERSON WITHOUT THE PRIOR EXPRESS WRITTEN AUTHORIZATION BY FMC TECHNOLOGIES	REVISIONS A 05-08-13 B 1-22-14 C 5-13-14	DESCRIPTION SURFACE WELLHEAD LAYOUT UNIHEAD, UH-1, SOW, DEVON ENERGY, ODESSA	DRAWN BY K. VU 05-08-13	FMC Technologies DRAWING NUMBER DM100161771-2B
			DRAFTING REVIEW Z. MARQUEZ 05-08-13	
			DESIGN REVIEW K. TAHA 05-08-13	
			APPROVED BY R. HAMILTON 05-08-13	



Fluid Technology

ContiTech Beattie Corp.
Website: www.contitechbeattie.com

Monday, June 14, 2010

RE: Drilling & Production Hoses
Lifting & Safety Equipment

To Helmerich & Payne,

A Continental Contitech hose assembly can perform as intended and suitable for the application regardless of whether the hose is secured or unsecured in its configuration. As a manufacturer of High Pressure Hose Assemblies for use in Drilling & Production, we do offer the corresponding lifting and safety equipment, this has the added benefit of easing the lifting and handling of each hose assembly whilst affording hose longevity by ensuring correct handling methods and procedures as well as securing the hose in the unlikely event of a failure; but in no way does the lifting and safety equipment affect the performance of the hoses providing the hoses have been handled and installed correctly. It is good practice to use lifting & safety equipment but not mandatory.


Should you have any questions or require any additional information/clarifications then please do not hesitate to contact us.

ContiTech Beattie is part of the Continental AG Corporation and can offer the full support resources associated with a global organization.

Best regards,

Robin Hodgson
Sales Manager
ContiTech Beattie Corp

ContiTech Beattie Corp,
11535 Brittmoore Park Drive,
Houston, TX 77041
Phone: +1 (832) 327-0141
Fax: +1 (832) 327-0148
www.contitechbeattie.com



RIG 212



QUALITY DOCUMENT

PHOENIX RUBBER INDUSTRIAL LTD.

6728 Szeged, Budapest út 10, Hungary • H-8701 Szeged, P. O. Box 152
Phone: (3662) 566-737 • Fax: (3662) 566-738

SALES & MARKETING: H-1092 Budapest, Ráday u. 42-44, Hungary • H-1440 Budapest, P. O. Box 26
Phone: (361) 456-4200 • Fax: (361) 217-2872, 456-4273 • www.taurusermerge.hu

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE		CERT. N°: 552	
PURCHASER: Phoenix Beattie Co.		P.O. N°: 1519FA-871	
PHOENIX RUBBER order N°: 170466	HOSE TYPE: 3" ID Choke and Kill Hose		
HOSE SERIAL N°: 34128	NOMINAL / ACTUAL LENGTH: 11,43 m		
W.P. 68,96 MPa 10000 psi	T.P. 103,4 MPa 15000 psi	Duration: 60 min.	
Pressure test with water at ambient temperature			
See attachment. (1 page)			
↑ 10 mm = 10 Min. → 10 mm = 25 MPa			
COUPLINGS			
Type	Serial N°	Quality	Heat N°
3" coupling with 4 1/16" Flange end	720 719	AISI 4130	C7626
		AISI 4130	47357
API Spec 16 C Temperature rate: "B"			
All metal parts are flawless			
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.			
Date: 29. April, 2002.	Inspector	Quality Control PHOENIX RUBBER Industrial Ltd. Hose Inspection and VESSELS & TUBES CONTROL PHOENIX RUBBER S.C.	

14094-66

40920-0-00015 N800C

6	GNL +0.000	0.00	12.00
	RDL +0.000	0.00	14.00
	BL +0.000	0.00	14.00
7	GNL +0.000	0.00	40 43.15 60 80
	RDL +0.000	0.00	43.15 46.30 60 80
	BL +0.000	0.00	46.30 49.45 60 80
8	GNL +0.000	0.00	43.15 46.30
	RDL +0.000	0.00	46.30 49.45
	BL +0.000	0.00	49.45 52.60
5	GNL +0.000	0.00	46.30 49.45
	RDL +0.000	0.00	49.45 52.60
	BL +0.000	0.00	52.60 55.75
4	GNL +0.000	0.00	55.75 58.90
	RDL +0.000	0.00	58.90 62.05
	BL +0.000	0.00	62.05 65.20
3	GNL +0.000	0.00	65.20 68.35
	RDL +0.000	0.00	68.35 71.50
	BL +0.000	0.00	71.50 74.65
2	GNL +0.000	0.00	74.65 77.80
	RDL +0.000	0.00	77.80 80.95
	BL +0.000	0.00	80.95 84.10

[Signature]
PHOENIX RUBBER
 Industrial Ltd.
 Hose Inspection and
 Certification Dept.

VERIFIED TRUE CO.
PHOENIX RUBBER CO.
[Signature]