

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD Hobbs

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010

SUNDRY NOTICES AND REPORTS ON WELLS
Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.

SUBMIT IN TRIPLICATE - Other instructions on reverse side.

1. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. NMNM122621
2. Name of Operator EOG RESOURCES INCORPORATED Contact: STAN WAGNER E-Mail: stan_wagner@eogresources.com		6. If Indian, Allottee or Tribe Name
3a. Address MIDLAND, TX 79702	3b. Phone No. (include area code) Ph: 432-686-3689	7. If Unit or CA/Agreement, Name and/or No.
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 11 T26S R33E SESE 9FSL 583FEL		8. Well Name and No. <i>14</i> WHIRLING WIND <i>14</i> FED COM 702H <input checked="" type="checkbox"/>
		9. API Well No. 30-025-42934-00-X1
		10. Field and Pool, or Exploratory WC-025 G09 S253336D
		11. County or Parish, and State LEA COUNTY, NM

HOBBS OCD

MAY 05 2016

RECEIVED

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Change to Original A PD
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

EOG Resources requests permission to use a multi-bowl wellhead system for this well.

After running the 10-3/4" surface casing, a 13-5/8" BOP/BOPE system with a minimum working pressure of 5000 psi will be installed on the wellhead system and will be pressure tested to 250 psi low followed by a 5000 psi pressure test.

This pressure test will be repeated at least every 30 days, as per Onshore Order No. 2.

The minimum working pressure of the BOP and related BOPE required for drilling below the surface casing shoe shall be 5000 psi.

The multi-bowl wellhead will be installed by vendor's representative(s). A copy of the instructions for the Stream Flo FBD100 Multi-Bowl WH system has been sent to the NM BLM

14. I hereby certify that the foregoing is true and correct.

**Electronic Submission #337622 verified by the BLM Well Information System
For EOG RESOURCES INCORPORATED, sent to the Hobbs
Committed to AFMSS for processing by PRISCILLA PEREZ on 04/27/2016 (16PP0597SE)**

Name (Printed/Typed) STAN WAGNER	Title REGULATORY ANALYST
Signature (Electronic Submission)	Date 04/27/2016

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By <i>Henrich Dennis</i>	Title <i>Petroleum Engineer</i>	Date <i>5/1/2016</i>
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office <i>Carlsbad Field Office</i>

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ****

KE

MAY 06 2016

WY

Additional data for EC transaction #337622 that would not fit on the form

32. Additional remarks, continued

office in Carlsbad, NM.

The wellhead will be installed by a third party welder while being monitored by WH vendor's representative.

All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type.

A solid steel body pack-off will be utilized after running and cementing the intermediate casing. After installation the pack-off and lower flange will be pressure tested to 5000 psi. Prior to running the intermediate casing, the rams will be changed out to accommodate the 7-5/8" casing.

The bonnet seals will be tested to 1500 psi. After installing the intermediate casing the casing rams will be removed and replaced with variable bore rams. The remaining BOPE will not be retested after installing the intermediate casing.

→ SEE COA

Both the surface and intermediate casing strings will be tested as per Onshore Order No. 2 to at least 0.22 psi/ft. or 1500 psi, whichever is greater.


Wellhead drawing attached.

Whirling Wind 11 Fed Com 702H
30-025-42934
EOG Resources, Inc
Surface Location: Sec. 11, T. 26S, R. 33E
Conditions of Approval

See below for the conditions of approval for the multi-bowl wellhead system.

1. All blowout preventer (BOP) and related equipment (BOPE) shall comply with well control requirements as described in Onshore Oil and Gas Order No. 2 and API 53.
2. Operator has proposed a **multi-bowl wellhead assembly**. This assembly (BOPE/BOPE) will be tested when installed on the surface casing. Minimum working pressure of the blowout preventer (BOP) and related equipment (BOPE) required for drilling below the surface casing shoe shall be **5000 (5M) psi**.
 - a. Wellhead shall be installed by manufacturer's representatives, submit documentation with subsequent sundry.
 - b. All BOP equipment will be tested utilizing a conventional test plug. Not a cup or J-packer type.
 - c. If the welding is performed by a third party, the manufacturer's representative shall monitor the temperature to verify that it does not exceed the maximum temperature of the seal.
 - d. Manufacturer representative shall install the test plug for the initial and all BOP testing.
 - e. **Prior to running the intermediated casing, the rams will be changed out to accommodate the 7-5/8" casing. After installing the intermediate casing the casing rams will be removed and replaced with variable bore rams.**
3. Operator has broken a seal on the BOP stack therefore per Onshore Oil and Gas Order No. 2 **the entire BOP stack shall be tested prior to drilling out the intermediated casing.**
 - a. A solid steel body pack-off will be utilized after running & cementing the intermediate casing. After installation of the pack-off and lower flange will be pressure tested to 5000 psi.
 - b. If the cement does not circulate and one inch operations would have been possible with a standard wellhead, the well head shall be cut off, cementing operations performed and another wellhead installed.

KGR 05012016

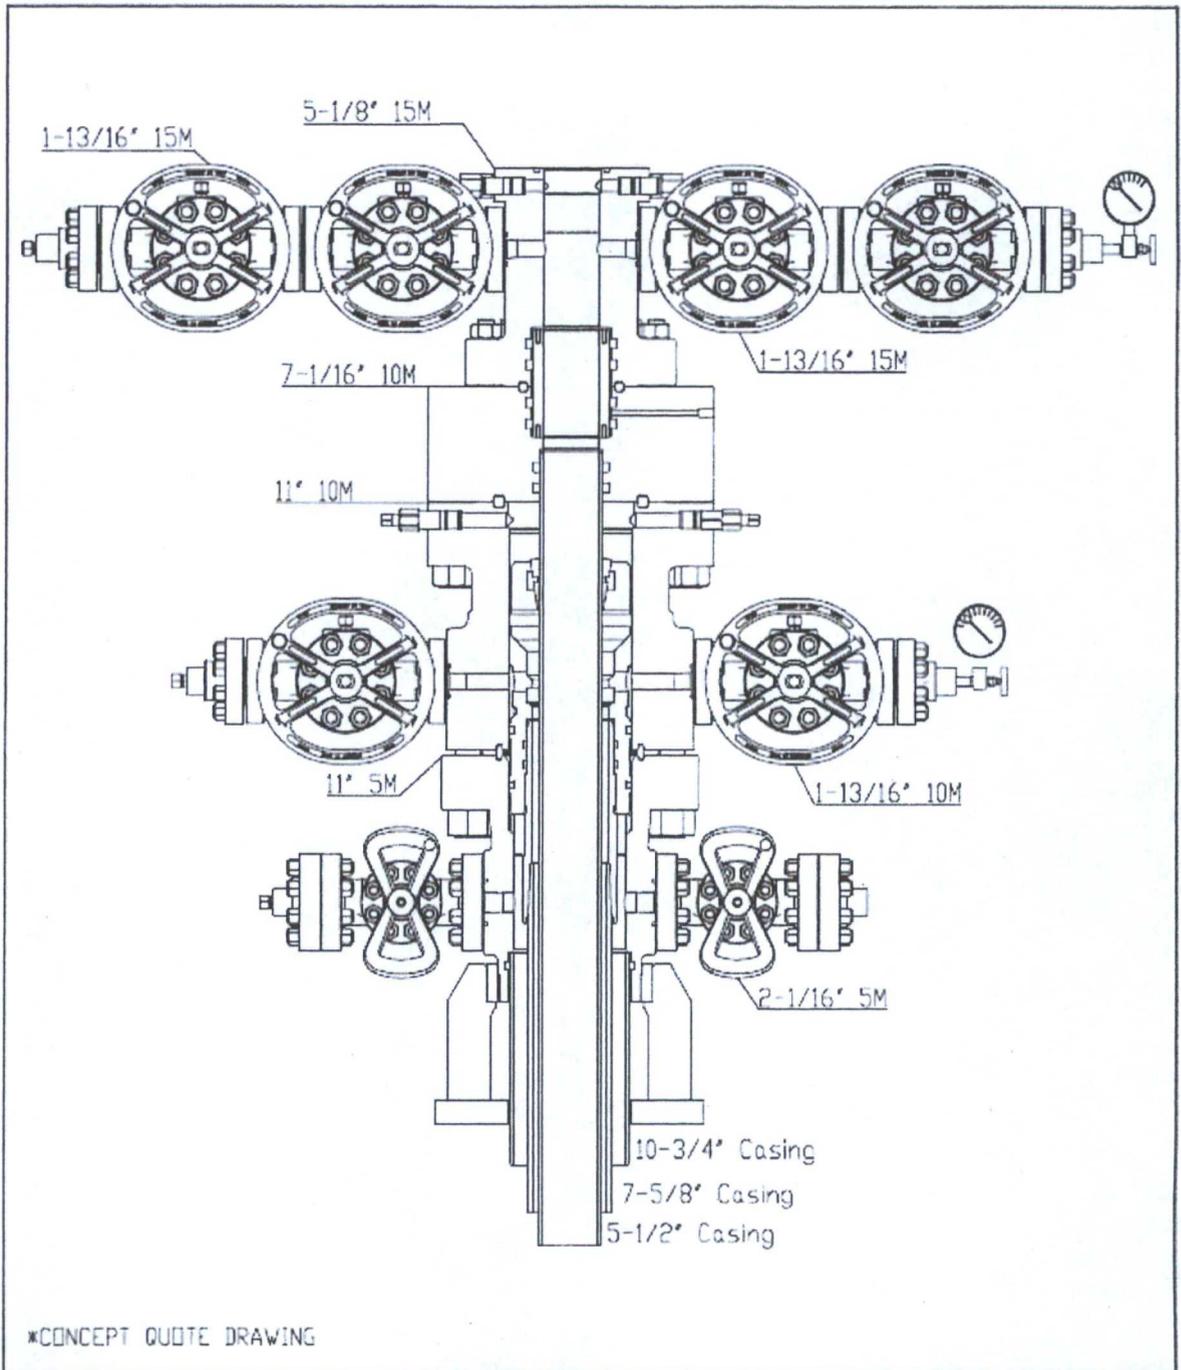

EDG RESOURCES

10-3/4" X 7-5/8" X 5-1/2"
 FBD-100 WELLHEAD SYSTEM
 QUOTE # - 93482

DWN	BAY	1/28/16
CHK		
APP		
	BY	DATE



We make Energy - Global Strength.

DRAWING NO
 WH-15848