

Submit 1 Copy To Appropriate District Office
 District I - (575) 393-6161
 1625 N. French Dr., Hobbs, NM 88240
 District II - (575) 748-1283
 811 S. First St., Artesia, NM 88210
 District III - (505) 334-6178
 1000 Rio Brazos Rd., Aztec, NM 87410
 District IV - (505) 476-3460
 1220 S. St. Francis Dr., Santa Fe, NM 87505

State of New Mexico
 Energy, Minerals and Natural Resources

Form C-103
 Revised August 1, 2011

OIL CONSERVATION DIVISION
 1220 South St. Francis Dr.
 Santa Fe, NM 87505

WELL API NO. 30-025-38576	✓
5. Indicate Type of Lease STATE <input checked="" type="checkbox"/> FEE <input type="checkbox"/>	✓
6. State Oil & Gas Lease No. V07530-0001	
7. Lease Name or Unit Agreement Name Linam AGI	✓
8. Wells Number 1 and 2	✓
9. OGRID Number 36785	✓
10. Pool name or Wildcat Wildcat	
11. Elevation (Show whether DR, RKB, RT, GR, etc.) 3736 GR	

SUNDRY NOTICES AND REPORTS ON WELLS
 (DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well Gas Well Other injection

2. Name of Operator
DCP Midstream LP ✓

3. Address of Operator
370 17th Street, Suite 2500, Denver CO 80202

4. Well Location
Unit Letter K; 1980 feet from the South line and 1980 feet from the West line
Section 30 Township 18S Range 37E NMPM County Lea ✓

11. Elevation (Show whether DR, RKB, RT, GR, etc.)
3736 GR

HOBBS OCD
MAR 31 2016
RECEIVED

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:		SUBSEQUENT REPORT OF:	
PERFORM REMEDIAL WORK <input type="checkbox"/>	PLUG AND ABANDON <input type="checkbox"/>	REMEDIAL WORK <input type="checkbox"/>	ALTERING CASING <input type="checkbox"/>
TEMPORARILY ABANDON <input type="checkbox"/>	CHANGE PLANS <input type="checkbox"/>	COMMENCE DRILLING OPNS. <input type="checkbox"/>	P AND A <input type="checkbox"/>
PULL OR ALTER CASING <input type="checkbox"/>	MULTIPLE COMPL <input type="checkbox"/>	CASING/CEMENT JOB <input type="checkbox"/>	
DOWNHOLE COMMINGLE <input type="checkbox"/>			
OTHER: <input type="checkbox"/>		OTHER: Monthly Report pursuant to Workover C-103	<input checked="" type="checkbox"/>

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

Monthly Report for the Month ending February 29, 2016 (2/1/16-2/29/16) Pursuant to Workover C-103 for Linam AGI #1 and AGI#2

This is the forty-sixth monthly submittal of data as agreed to between DCP and OCD relative to injection pressure, TAG temperature and casing annulus pressure for Linam AGI#1 until the well is worked over. AGI#2 was brought online in October 2015. For the month of February, AGI #2 was shut down, and all TAG was sent to AGI #1. Since the data for both wells provides the overall picture of the performance of the AGI system, the data for both wells is analyzed and presented herein even though that analysis it is only required on a quarterly basis for AGI #2, and even though AGI #2 was not used during the month of February.

For the month of February the values for the injection parameters being monitored for AGI #1 were as follows: Average TAG Injection Pressure: 1,645 psig, Average Annulus Pressure: 201 psig, Average Pressure Differential: 1,444 psig, Average TAG Temperature: 121°F, Average TAG injection rate: 190,969 scf/hr. For AGI #2 these values are as follows: Average TAG Pressure (within blocked off section): 1,603 psig, Average Annulus Pressure: 0.45 psig, Average Pressure Differential: 1,602 psig, Average TAG Temperature: 49°F, Average TAG injection rate: 0 scf/hr. AGI#2 was idle for the month and the recorded tubing pressure between well bore and block valve and TAG temperature values for AGI #2 reflect static conditions of the shut-in well. They are the result of the fact that when the well was shut down, gas was trapped between the shut off point and the measurement point, and, thus, the sensors are reflecting daily heating and cooling effects on the pipe segment involved rather than reflecting actual injection conditions in the well. DCP calibrated and zeroed the Flow Meter for AGI #2 on 2-9-16 and programmed a low cutoff so that if the flow is below .05, it is assumed to be zero. Downhole sensors for AGI #2 are still not working, and DCP continues to work on getting this issue resolved.

These average values are shown as lines on the various graphs that display the respective parameters. The Linam AGI#1 continues to serve as a safe, effective and environmentally-friendly system to dispose of Class II wastes consisting of H₂S and CO₂. According to all data obtained from AGI#2, is also a safe, effective and environmentally-friendly system to dispose of Class II H₂S and CO₂ wastes and provides the required redundancy to the plant that allows for operation with disposal to either or both wells.


I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE [Signature] TITLE Consultant to DCP Midstream/ Geolex, Inc. DATE 2/16/2016
 Type or print name Alberto A. Gutierrez, RG E-mail address: aag@geolex.com PHONE: 505-842-8000

For State Use Only
 APPROVED BY: [Signature] TITLE Petroleum Engineer DATE 02/31/16
 Conditions of Approval (if any): _____

[Handwritten mark]


Linam AGI #1 TAG Injection Pressure, Casing Annulus Pressure and TAG Injection Temperature 2/1/2016 to 2/29/2016

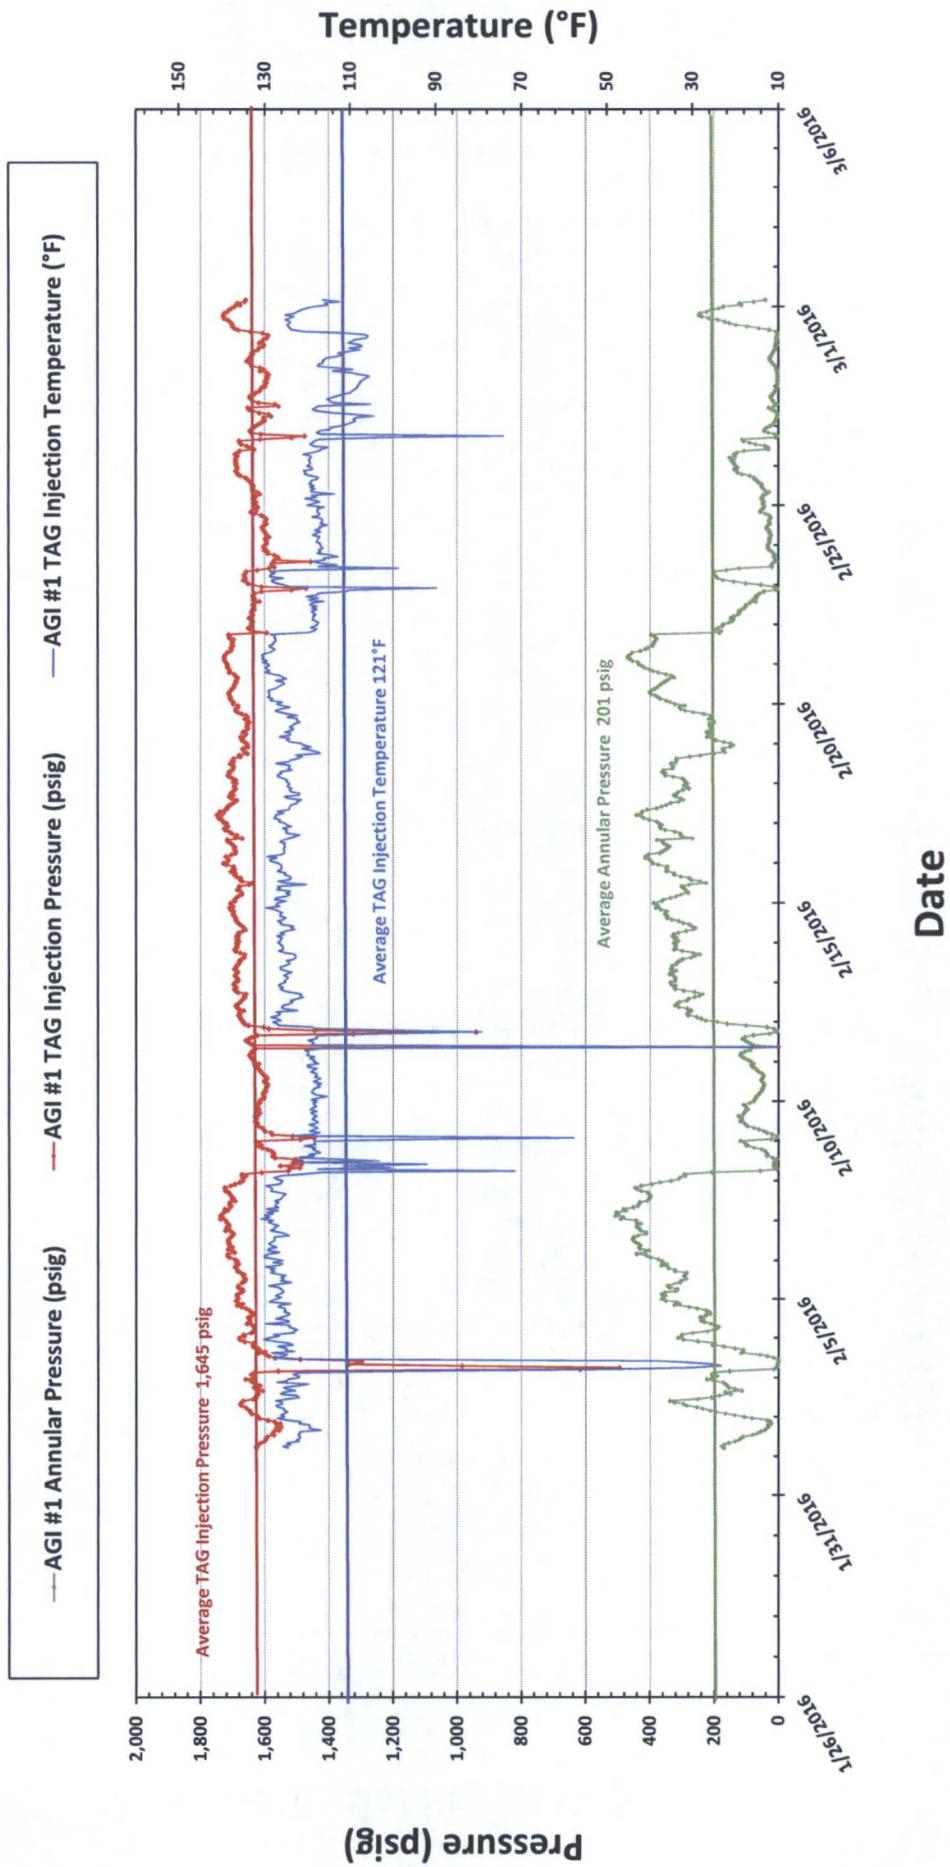

Linam AGI #2 Injection and Casing Annulus Pressure and TAG Injection Flowrate 2/1/2016 to 2/29/2016

AGI #2 was shut in for the entire month of February. In spite of that fact, the pressure in the tubing and temperature of gas in tubing measurements were obtained from sensors. Since gas is trapped in the well tubing between the block off point and below the measuring point and was subject to heating and cooling effects which are reflected in the pressure and temperature variations as detected at the sensor. These readings do not reflect any injection into the well but rather the heating and cooling effects of the pipe segments involved. On 2-9, the AGI #2 flow meter was calibrated and zeroed, and a cutoff programmed so that if it registers below 0.05, the flow will be assumed to be zero so that data will not be misleading when only one well is in operation. Since we know that the well was blocked off and all acid gas routed to AGI #1, flowrate to AGI#2, is set to zero for the entire month.

— Calculated AGI #2 Flow Rate (scf/hr)
— AGI #2 TAG Injection Pressure (psig)
— AGI #2 Annular Pressure (psig)

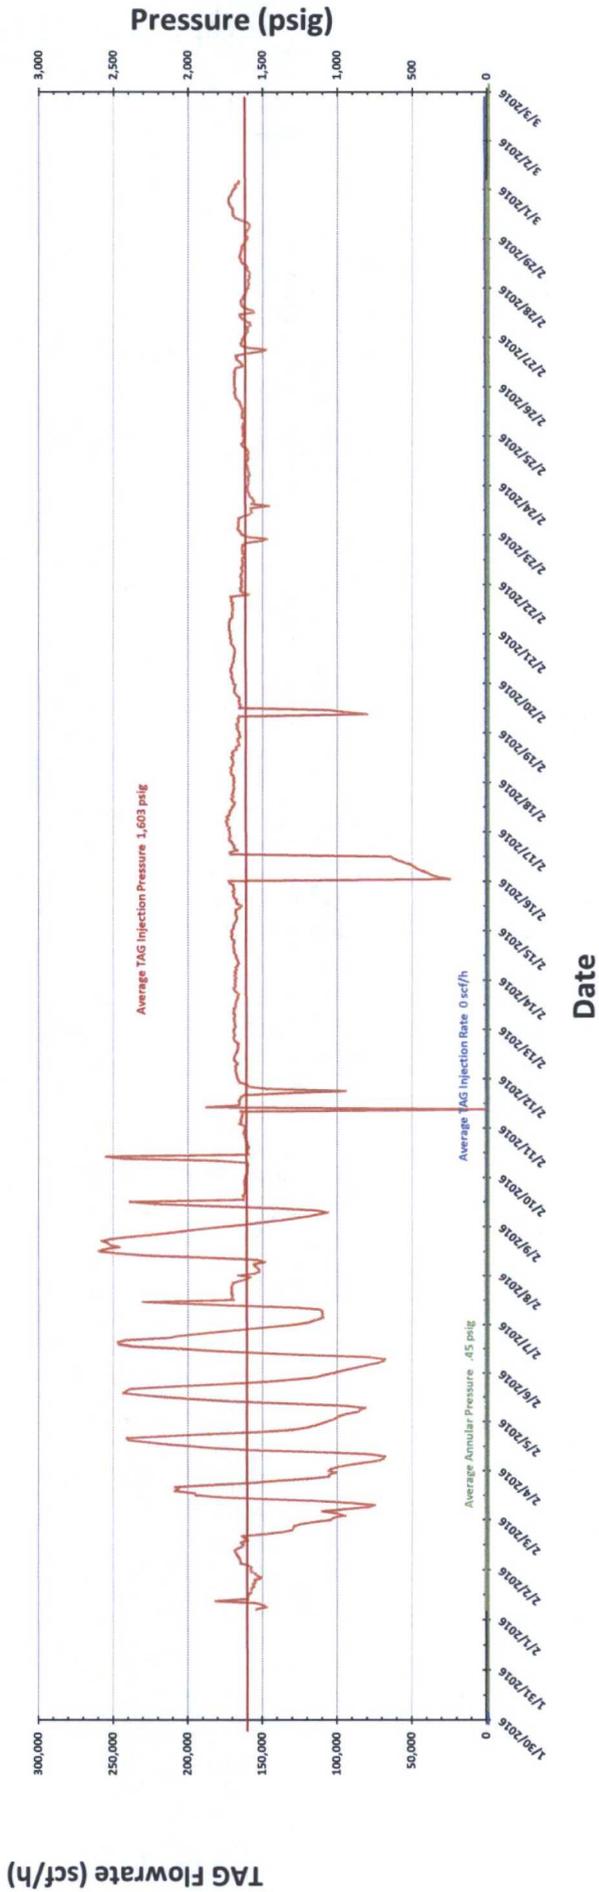

Linam AGI #2 TAG Injection Pressure and Casing Annular Pressure Differential (psig) 2/1/2016 to 2/29/2016

