

UNITED STATES
DEPARTMENT OF THE INTERIOR
BUREAU OF LAND MANAGEMENT

OCD Hobbs

FORM APPROVED
OMB NO. 1004-0135
Expires: July 31, 2010**SUNDRY NOTICES AND REPORTS ON WELLS**
*Do not use this form for proposals to drill or to re-enter an abandoned well. Use form 3160-3 (APD) for such proposals.***SUBMIT IN TRIPLICATE - Other instructions on reverse side.**

1. Type of Well <input checked="" type="checkbox"/> Oil Well <input type="checkbox"/> Gas Well <input type="checkbox"/> Other		5. Lease Serial No. NMNM116166
2. Name of Operator MCELVAIN OIL & GAS PROP INC		6. If Indian, Allottee or Tribe Name
Contact: TONY G COOPER E-Mail: tony.cooper@mcelvain.com		7. If Unit or CA/Agreement, Name and/or No.
3a. Address 1050 17TH STREET SUITE 1800 DENVER, CO 80265-1801	3b. Phone No. (include area code) Ph: 303-893-0933 Ext: 331	8. Well Name and No. EK 29 BS2 FEDERAL COM 3H
4. Location of Well (Footage, Sec., T., R., M., or Survey Description) Sec 29 T18S R34E SESW 305FSL 2155FWL		9. API Well No. 30-025-42699-00-X1
		10. Field and Pool, or Exploratory E K
		11. County or Parish, and State LEA COUNTY, NM

12. CHECK APPROPRIATE BOX(ES) TO INDICATE NATURE OF NOTICE, REPORT, OR OTHER DATA

TYPE OF SUBMISSION	TYPE OF ACTION			
<input checked="" type="checkbox"/> Notice of Intent	<input type="checkbox"/> Acidize	<input type="checkbox"/> Deepen	<input type="checkbox"/> Production (Start/Resume)	<input type="checkbox"/> Water Shut-Off
<input type="checkbox"/> Subsequent Report	<input type="checkbox"/> Alter Casing	<input type="checkbox"/> Fracture Treat	<input type="checkbox"/> Reclamation	<input type="checkbox"/> Well Integrity
<input type="checkbox"/> Final Abandonment Notice	<input type="checkbox"/> Casing Repair	<input type="checkbox"/> New Construction	<input type="checkbox"/> Recomplete	<input checked="" type="checkbox"/> Other
	<input type="checkbox"/> Change Plans	<input type="checkbox"/> Plug and Abandon	<input type="checkbox"/> Temporarily Abandon	Change to Original A
	<input type="checkbox"/> Convert to Injection	<input type="checkbox"/> Plug Back	<input type="checkbox"/> Water Disposal	PD

13. Describe Proposed or Completed Operation (clearly state all pertinent details, including estimated starting date of any proposed work and approximate duration thereof. If the proposal is to deepen directionally or recomplete horizontally, give subsurface locations and measured and true vertical depths of all pertinent markers and zones. Attach the Bond under which the work will be performed or provide the Bond No. on file with BLM/BIA. Required subsequent reports shall be filed within 30 days following completion of the involved operations. If the operation results in a multiple completion or recompletion in a new interval, a Form 3160-4 shall be filed once testing has been completed. Final Abandonment Notices shall be filed only after all requirements, including reclamation, have been completed, and the operator has determined that the site is ready for final inspection.)

?McElvain Energy, Inc. is submitting this sundry in order to use a choke hose on H&P rig 497 instead of hard piping. The attached literature describe the hose and its capabilities. H&P has been using this hose for years. McElvain will adhere to all specifications of the hose such as bending radius, etc?we appreciate the BLM working with us on this matter.?

HOBBS OCD**AUG 10 2016****RECEIVED**

14. I hereby certify that the foregoing is true and correct. Electronic Submission #345723 verified by the BLM Well Information System For MCELVAIN OIL & GAS PROP INC, sent to the Hobbs Committed to AFMSS for processing by ED FERNANDEZ on 08/08/2016 (16EF0011SE)	
Name (Printed/Typed) CHRIS CAPLIS	Title VP DRILLING AND COMPLETION
Signature (Electronic Submission)	Date 07/25/2016

THIS SPACE FOR FEDERAL OR STATE OFFICE USE

Approved By <u>EDWARD FERNANDEZ</u> <i>Ed Fernandez</i>	Title <u>PETROLEUM ENGINEER</u>	Date <u>08/08/2016</u>
Conditions of approval, if any, are attached. Approval of this notice does not warrant or certify that the applicant holds legal or equitable title to those rights in the subject lease which would entitle the applicant to conduct operations thereon.		Office Hobbs <i>KZ</i>

Title 18 U.S.C. Section 1001 and Title 43 U.S.C. Section 1212, make it a crime for any person knowingly and willfully to make to any department or agency of the United States any false, fictitious or fraudulent statements or representations as to any matter within its jurisdiction.

**** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ** BLM REVISED ****


CONDITIONS OF APPROVAL

OPERATOR'S NAME:	MCELVAIN ENERGY, INC.
LEASE NO.:	NM245247
WELL NAME & NO.:	EK 29 BS2 Federal Com 3H
SURFACE HOLE FOOTAGE:	305' FSL & 2155' FWL
BOTTOM HOLE FOOTAGE:	510' FNL & 1980' FWL
LOCATION:	Section 29, T.18S., R34E., NMPM
COUNTY:	Lea County, New Mexico

Original COA still apply with the following changes

1. **Variance approved to use flex line from BOP to choke manifold.** Check condition of flexible line from BOP to choke manifold, replace if exterior is damaged or if line fails test. Line to be as straight as possible with no hard bends and is to be anchored according to Manufacturer's requirements. The flexible hose can be exchanged with a hose of equal size and equal or greater pressure rating. Anchor requirements, specification sheet and hydrostatic pressure test certification matching the hose in service, to be onsite for review. These documents shall be posted in the company man's trailer and on the rig floor. If the BLM inspector questions the straightness of the hose, a BLM engineer will be contacted and will review in the field or via picture supplied by inspector to determine if changes are required (operator shall expect delays if this occurs).


EGF 080816

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 1595	
PURCHASER: ContiTech Beattie Co.				P.O. N°: 006227	
CONTITECH ORDER N°: 531895		HOSE TYPE: 3" ID		Choke and Kill Hose	
HOSE SERIAL N°: 63389		NOMINAL / ACTUAL LENGTH: 10,67 m / 10,71 m			
W.P. 68,9 MPa 10000 psi		T.P. 103,4 MPa 15000 psi		Duration: 60 min.	
<p>Pressure test with water at ambient temperature</p> <p style="text-align: center;">See attachment. (1 page)</p> <p>↑ 10 mm = 10 Min. → 10 mm = 20 MPa</p>					
COUPLINGS Type		Serial N°		Quality	
3" coupling with		2155 2159		AISI 4130	
4 1/16" 10K API Flange end				AISI 4130	
				Heat N°	
				20231 22021	
				34031	
NOT DESIGNED FOR WELL TESTING				API Spec 16 C	
				Temperature rate:"B"	
All metal parts are flawless					
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.					
COUNTRY OF ORIGIN HUNGARY/EU					
Date:		Inspector		Quality Control	
27. August 2012.				ContiTech Rubber Industrial Kft. Quality Control Dept. 	



QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 1596																
PURCHASER: ContiTech Beattie Co.				P.O. N°: 006227																
CONTITECH ORDER N°: 531895		HOSE TYPE: 3" ID		Choke and Kill Hose																
HOSE SERIAL N°: 63390		NOMINAL / ACTUAL LENGTH: 10,67 m / 10,74 m																		
W.P. 68,9 MPa 10000 psi		T.P. 103,4 MPa 15000 psi		Duration: 60 min.																
<p>Pressure test with water at ambient temperature</p> <p style="text-align: center;">See attachment. (1 page)</p> <p>↑ 10 mm = 10 Min. → 10 mm = 20 MPa</p> <table border="1"> <thead> <tr> <th>COUPLINGS Type</th> <th>Serial N°</th> <th>Quality</th> <th>Heat N°</th> </tr> </thead> <tbody> <tr> <td>3" coupling with</td> <td>2151 2150</td> <td>AISI 4130</td> <td>20231</td> </tr> <tr> <td>4 1/16" 10K API Flange end</td> <td></td> <td>AISI 4130</td> <td>34031</td> </tr> </tbody> </table> <p>NOT DESIGNED FOR WELL TESTING API Spec 16 C Temperature rate:"B"</p> <p>All metal parts are flawless</p> <p>WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.</p> <p>STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.</p> <p style="text-align: center;">COUNTRY OF ORIGIN HUNGARY/EU</p> <table border="1"> <tr> <td>Date: 27. August 2012.</td> <td>Inspector</td> <td>Quality Control ContiTech Rubber Industrial Kft. Quality Control Dept. <i>[Signature]</i></td> </tr> </table>						COUPLINGS Type	Serial N°	Quality	Heat N°	3" coupling with	2151 2150	AISI 4130	20231	4 1/16" 10K API Flange end		AISI 4130	34031	Date: 27. August 2012.	Inspector	Quality Control ContiTech Rubber Industrial Kft. Quality Control Dept. <i>[Signature]</i>
COUPLINGS Type	Serial N°	Quality	Heat N°																	
3" coupling with	2151 2150	AISI 4130	20231																	
4 1/16" 10K API Flange end		AISI 4130	34031																	
Date: 27. August 2012.	Inspector	Quality Control ContiTech Rubber Industrial Kft. Quality Control Dept. <i>[Signature]</i>																		

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 1597																
PURCHASER: ContiTech Beattie Co.				P.O. N°: 006227																
CONTITECH ORDER N°: 531895		HOSE TYPE: 3" ID Choke and Kill Hose																		
HOSE SERIAL N°: 63391		NOMINAL / ACTUAL LENGTH: 10,67 m / 10,75 m																		
W.P. 68,9 MPa 10000 psi		T.P. 103,4 MPa 15000 psi		Duration: 60 min.																
<p>Pressure test with water at ambient temperature</p> <p style="text-align: center;">See attachment. (1 page)</p> <p>↑ 10 mm = 10 Min. → 10 mm = 20 MPa</p> <table border="1"> <thead> <tr> <th>COUPLINGS Type</th> <th>Serial N°</th> <th>Quality</th> <th>Heat N°</th> </tr> </thead> <tbody> <tr> <td>3" coupling with</td> <td>2152 2154</td> <td>AISI 4130</td> <td>20231</td> </tr> <tr> <td>4 1/16" 10K API Flange end</td> <td></td> <td>AISI 4130</td> <td>34031</td> </tr> </tbody> </table> <p style="text-align: center;">NOT DESIGNED FOR WELL TESTING</p> <p style="text-align: right;">API Spec 16 C Temperature rate:"B"</p> <p>All metal parts are flawless</p> <p>WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.</p> <p>STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.</p> <p style="text-align: center;">COUNTRY OF ORIGIN HUNGARY/EU</p> <table border="1"> <tr> <td>Date: 27. August 2012.</td> <td>Inspector</td> <td>Quality Control ContiTech Rubber Industrial Kft. Quality Control Dept. (1)</td> </tr> </table>						COUPLINGS Type	Serial N°	Quality	Heat N°	3" coupling with	2152 2154	AISI 4130	20231	4 1/16" 10K API Flange end		AISI 4130	34031	Date: 27. August 2012.	Inspector	Quality Control ContiTech Rubber Industrial Kft. Quality Control Dept. (1)
COUPLINGS Type	Serial N°	Quality	Heat N°																	
3" coupling with	2152 2154	AISI 4130	20231																	
4 1/16" 10K API Flange end		AISI 4130	34031																	
Date: 27. August 2012.	Inspector	Quality Control ContiTech Rubber Industrial Kft. Quality Control Dept. (1)																		

Yach
CordTech Rubber
Industrial Kft.
Quality Control Dept.
(1)

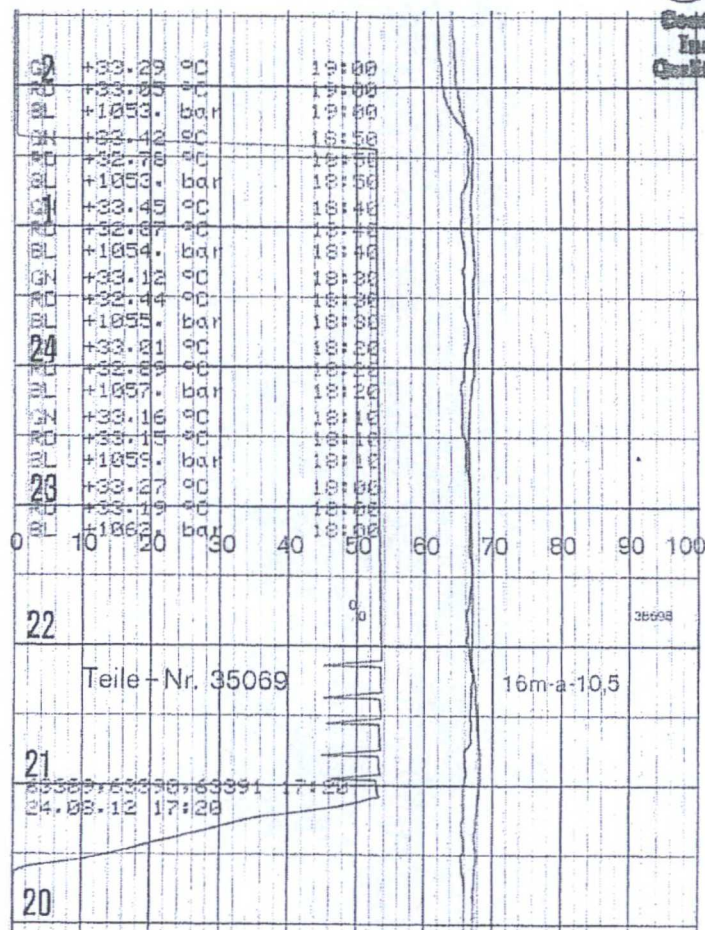

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 1598	
PURCHASER: ContiTech Beattie Co.				P.O. N°: 006227	
CONTITECH ORDER N°: 531895		HOSE TYPE: 3" ID		Choke and Kill Hose	
HOSE SERIAL N°: 63392		NOMINAL / ACTUAL LENGTH: 10,67 m / 10,76 m			
W.P. 68,9 MPa 10000 psi		T.P. 103,4 MPa 15000 psi		Duration: 60 min.	
<p>Pressure test with water at ambient temperature</p> <p style="text-align: center;">See attachment. (1 page)</p> <p>↑ 10 mm = 10 Min. → 10 mm = 20 MPa</p>					
COUPLINGS Type		Serial N°		Quality	
3" coupling with		2160 2157		AISI 4130	
4 1/16" 10K API Flange end				AISI 4130	
NOT DESIGNED FOR WELL TESTING				API Spec 16 C	
				Temperature rate:"B"	
All metal parts are flawless					
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.					
COUNTRY OF ORIGIN HUNGARY/EU					
Date:		Inspector		Quality Control	
23. August 2012.				<p>ContiTech Rubber Industrial Kft. Quality Control Dept.</p> <p><i>[Signature]</i></p>	

QUALITY CONTROL INSPECTION AND TEST CERTIFICATE				CERT. N°: 1599	
PURCHASER: ContiTech Beattie Co.				P.O. N°: 006227	
CONTITECH ORDER N°: 531895		HOSE TYPE: 3" ID Choke and Kill Hose			
HOSE SERIAL N°: 63393		NOMINAL / ACTUAL LENGTH: 10,67 m / 10,72 m			
W.P. 68,9 MPa 10000 psi		T.P. 103,4 MPa 15000 psi		Duration: 60 min.	
<p>Pressure test with water at ambient temperature</p> <p style="text-align: center;">See attachment. (1 page)</p> <p>↑ 10 mm = 10 Min. → 10 mm = 20 MPa</p>					
COUPLINGS Type		Serial N°		Quality	
3" coupling with		2156 2153		AISI 4130	
4 1/16" 10K API Flange end				AISI 4130	
				Heat N°	
				20231	
				34031	
NOT DESIGNED FOR WELL TESTING				API Spec 16 C	
				Temperature rate:"B"	
All metal parts are flawless					
WE CERTIFY THAT THE ABOVE HOSE HAS BEEN MANUFACTURED IN ACCORDANCE WITH THE TERMS OF THE ORDER INSPECTED AND PRESSURE TESTED AS ABOVE WITH SATISFACTORY RESULT.					
STATEMENT OF CONFORMITY: We hereby certify that the above items/equipment supplied by us are in conformity with the terms, conditions and specifications of the above Purchaser Order and that these items/equipment were fabricated inspected and tested in accordance with the referenced standards, codes and specifications and meet the relevant acceptance criteria and design requirements.					
COUNTRY OF ORIGIN HUNGARY/EU					
Date:		Inspector		Quality Control	
23. August 2012.				ContiTech Rubber Industrial Kft. Quality Control Dept. (1)  	

Yacm
ContiTech Rubber
Industrial Kft.
Quality Control Dept
(1)

GN	+31.62 °C	18:50
RD	+32.66 °C	18:50
BL	+1050. bar	18:50
GN	+31.64 °C	18:40
RD	+32.69 °C	18:40
BL	+1050. bar	18:40
GN	+31.64 °C	18:30
RD	+32.84 °C	18:30
BL	+1051. bar	18:30
GN	+31.77 °C	18:20
RD	+33.05 °C	18:20
BL	+1053. bar	18:20
GN	+31.94 °C	18:10
RD	+33.15 °C	18:10
BL	+1055. bar	18:10
GN	+31.70 °C	18:00
RD	+33.09 °C	18:00
BL	+1056. bar	18:00
GN	+31.69 °C	17:50
RD	+32.93 °C	17:50
BL	+1059. bar	17:50
<i>63393</i> 63393 63393 17:30 21.03.12 17:30		
<i>63393</i> 63393 63393 17:20 22.03.12 17:20		
0 10 20 30 40 50 60 70 80 90 100		
10 % 35598		
Teile - Nr. 35069 16m-a-10,5		



Hose Data Sheet

CRI Order No.	531895
Customer	ContiTech Beattie Co.
Customer Order No	PO6227 Pbc13080-H&P
Item No.	1
Hose Type	Flexible Hose
Standard	API SPEC 16 C
Inside dia in inches	3
Length	35 ft
Type of coupling one end	FLANGE 4 1/16" API SPEC 6A TYPE 6BX FOR 10000 PSI C/W BX155RING GROOVE
Type of coupling other end	FLANGE 4 1/16" API SPEC 6A TYPE 6BX FOR 10000 PSI C/W BX155 RING GROOVE
H2S service NACE MR0175	Yes
Working Pressure	10 000 psi
Design Pressure	10 000 psi
Test Pressure	15 000 psi
Safety Factor	2,25
Marking	USUAL PHOENIX
Cover	NOT FIRE RESISTANT
Outside protection	St. steel outer wrap
Internal stripwound tube	No
Lining	OIL RESISTANT
Safety clamp	No
Lifting collar	No
Element C	No
Safety chain	No
Safety wire rope	No
Max.design temperature [°C]	100
Min.design temperature [°C]	-20
MBR operating [m]	1,60
MBR storage [m]	1,40
Type of packing	WOODEN CRATE ISPM-15