

Submit 1 Copy To Appropriate District Office

District I - (575) 393-6161
1625 N. French Dr., Hobbs, NM 88240
District II - (575) 748-1283
811 S. First St., Artesia, NM 88210
District III - (505) 334-6178
1000 Rio Brazos Rd., Aztec, NM 87410
District IV - (505) 476-3460
1220 S. St. Francis Dr., Santa Fe, NM 87505

HOBBS OCD

State of New Mexico
Energy, Minerals and Natural Resources

Form C-103
Revised July 18, 2013

OIL CONSERVATION DIVISION

1220 South St. Francis Dr.
Santa Fe, NM 87505

WELL API NO.
30-025-31421

5. Indicate Type of Lease

STATE ☒ FEE ☐

6. State Oil & Gas Lease No.

19552

7. Lease Name or Unit Agreement Name

South Hobbs Unit (G/SA)

8. Well Number 230

9. OGRID Number

157984

10. Pool name or Wildcat

Hobbs (G/SA)

SUNDRY NOTICES AND REPORTS ON WELLS

(DO NOT USE THIS FORM FOR PROPOSALS TO DRILL OR TO DEEPEN OR PLUG BACK TO A DIFFERENT RESERVOIR. USE "APPLICATION FOR PERMIT" (FORM C-101) FOR SUCH PROPOSALS.)

1. Type of Well: Oil Well ☐ Gas Well ☐ Other ☐ Injector

2. Name of Operator

Occidental Permian Ltd

3. Address of Operator

P.O. Box 4294, Houston, TX 77210

4. Well Location

Unit Letter B : 1100 feet from the North line and 2220 feet from the East line
Section 4 Township 19S Range 38E NMPM County Lea

11. Elevation (Show whether DR, RKB, RT, GR, etc.)

3632' KB

12. Check Appropriate Box to Indicate Nature of Notice, Report or Other Data

NOTICE OF INTENTION TO:

PERFORM REMEDIAL WORK ☐ PLUG AND ABANDON ☐

TEMPORARILY ABANDON ☐ CHANGE PLANS ☐

PULL OR ALTER CASING ☐ MULTIPLE COMPL ☐

DOWNHOLE COMMINGLE ☐

CLOSED-LOOP SYSTEM ☐

OTHER: ☐

SUBSEQUENT REPORT OF:

REMEDIAL WORK ☒ ALTERING CASING ☐

COMMENCE DRILLING OPNS. ☐ P AND A ☐

CASING/CEMENT JOB ☐

OTHER: Return to Injection ☐

13. Describe proposed or completed operations. (Clearly state all pertinent details, and give pertinent dates, including estimated date of starting any proposed work). SEE RULE 19.15.7.14 NMAC. For Multiple Completions: Attach wellbore diagram of proposed completion or recompletion.

04/19/16 - 04/25/16

MIRU x NDWH x NUBOP. POOH 128 jts x on/off tool. RIH 5 1/2" CIBP @ 4060'. Added perfs @ 4016' - 4042'

RIH 5 1/2" pkr @ 3976' x 125 jts x on/off tool. Ran MIT and tested good. RD x NDBOP x NUWH x MO Location

**** Well returned to Injection

05/16/16

Rigless acid job with 1500 gals 15% NEFE. Pump rate @ 2.56 BPM (max) x PSI @ 600 (max).

Flush with 50 bbls FW x return to injection.

Spud Date:

04/19/16

Rig Release Date:

05/16/16

I hereby certify that the information above is true and complete to the best of my knowledge and belief.

SIGNATURE

April Hood

TITLE Regulatory Coordinator

DATE 08/24/2016

Type or print name April Hood

E-mail address: April_Hood@Oxy.com

PHONE: 713-366-5771

For State Use Only

APPROVED BY:

Malay BROWN

TITLE

Dist Supervisor

DATE


8/31/2016

Conditions of Approval (if any):

Wellbore Diagram : SHOU-230B04

35 2.875 OD/ 6.50# T&C External Upset
441 ID 2.347 Drift - Duoline 20 - Green
ind - %(WBD_OriginForDisplay) @(41)
35 2.875 OD/ 6.50# T&C External Upset
441 ID 2.347 Drift - Duoline 20 - New -
WBD_OriginForDisplay) @(42)
35 2.875 OD/ 6.50# T&C External Upset
441 ID 2.347 Drift - Duoline 20 - New -
WBD_OriginForDisplay) @(43)
35 2.875 OD/ 6.50# T&C External Upset
441 ID 2.347 Drift - Duoline 20 - New -
WBD_OriginForDisplay) @(45)
35 2.875 OD/ 6.50# T&C External Upset
441 ID 2.347 Drift - Duoline 20 - New -
WBD_OriginForDisplay) @(51)
35 2.875 OD/ 6.50# T&C External Upset
441 ID 2.347 Drift - Duoline 20 - New -
WBD_OriginForDisplay) @(59)
35 2.875 OD/ 6.50# T&C External Upset
441 ID 2.347 Drift - Duoline 20 - New -
WBD_OriginForDisplay) @(69)
55 8.625 OD/ 32.00# Round Short 7.921
7.796 Drift - New -
WBD_OriginForDisplay) @(1485)

35 2.875 OD/ 6.50# T&C External Upset
441 ID 2.347 Drift - Duoline 20 - Green
ind - %(WBD_OriginForDisplay) @(3966)
Off Tool (Tubing) 2.375" OD 2 3/8" T-2 -
rw - %(WBD_OriginForDisplay) @(3967)
cker Mandrel 5.500'-5 1/2" X 2 3/8" X
-20# ARROWSET 1-X DOUBLE GRIP PKR -
rw - %(WBD_OriginForDisplay) @(3975)
mp-Out Plug (2.375") - New -
WBD_OriginForDisplay) @(3976)
rforations - N/A @(4016-4042) Perforation
atus - Open Perforation Date - 01/01/1800
:00:00
rforations - N/A @(4070-4215) Perforation
atus - Closed-Squeezed Perforation Date -
/11/2007 00:00:00
rforations - N/A @(4226-4260) Perforation
atus - Closed-Squeezed Perforation Date -
/11/2007 00:00:00
55 5.500 OD/ 15.50# Round Short 4.950
4.825 Drift - New -
WBD_OriginForDisplay) @(4317)

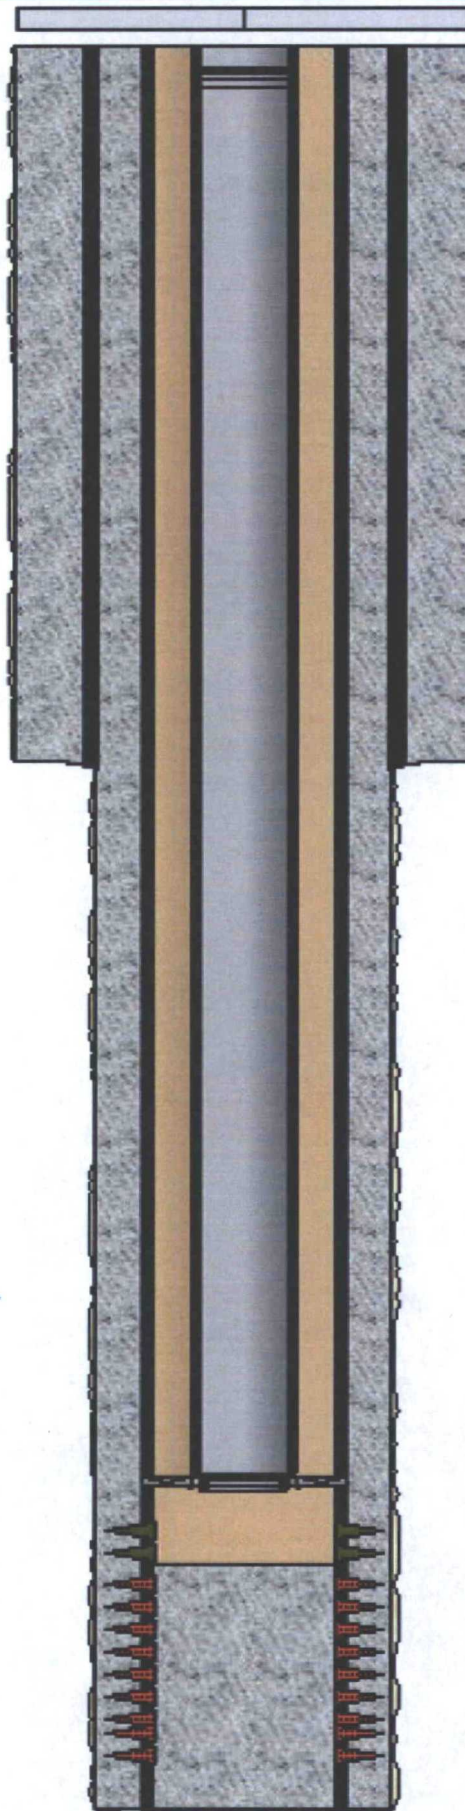

Wellbore Hole OD-12.2500 - N/A @(10-1471)
Cement - N/A @(10-1485)

Profile Nipple - F 2.375" / 1.875" Packing Bore -
@(3967)
Packer (Retrievable) 5.500'-5 1/2" X 2 3/8" X 14-
ARROWSET 1-X DOUBLE GRIP PKR - N/A @(3
Plug Back Total Depth - N/A @(4060)
Bridge Plug Cast Iron 5.500' - N/A @(4060-4062)

Producing Interval-GBSA/230B04W - N/A @(426
Cement - N/A @(10-4317)
Total Depth - N/A @(4317)
Wellbore Hole OD- 7.8750 - N/A @(1471-4317)
Plug Back - N/A - N/A @(4060)

