
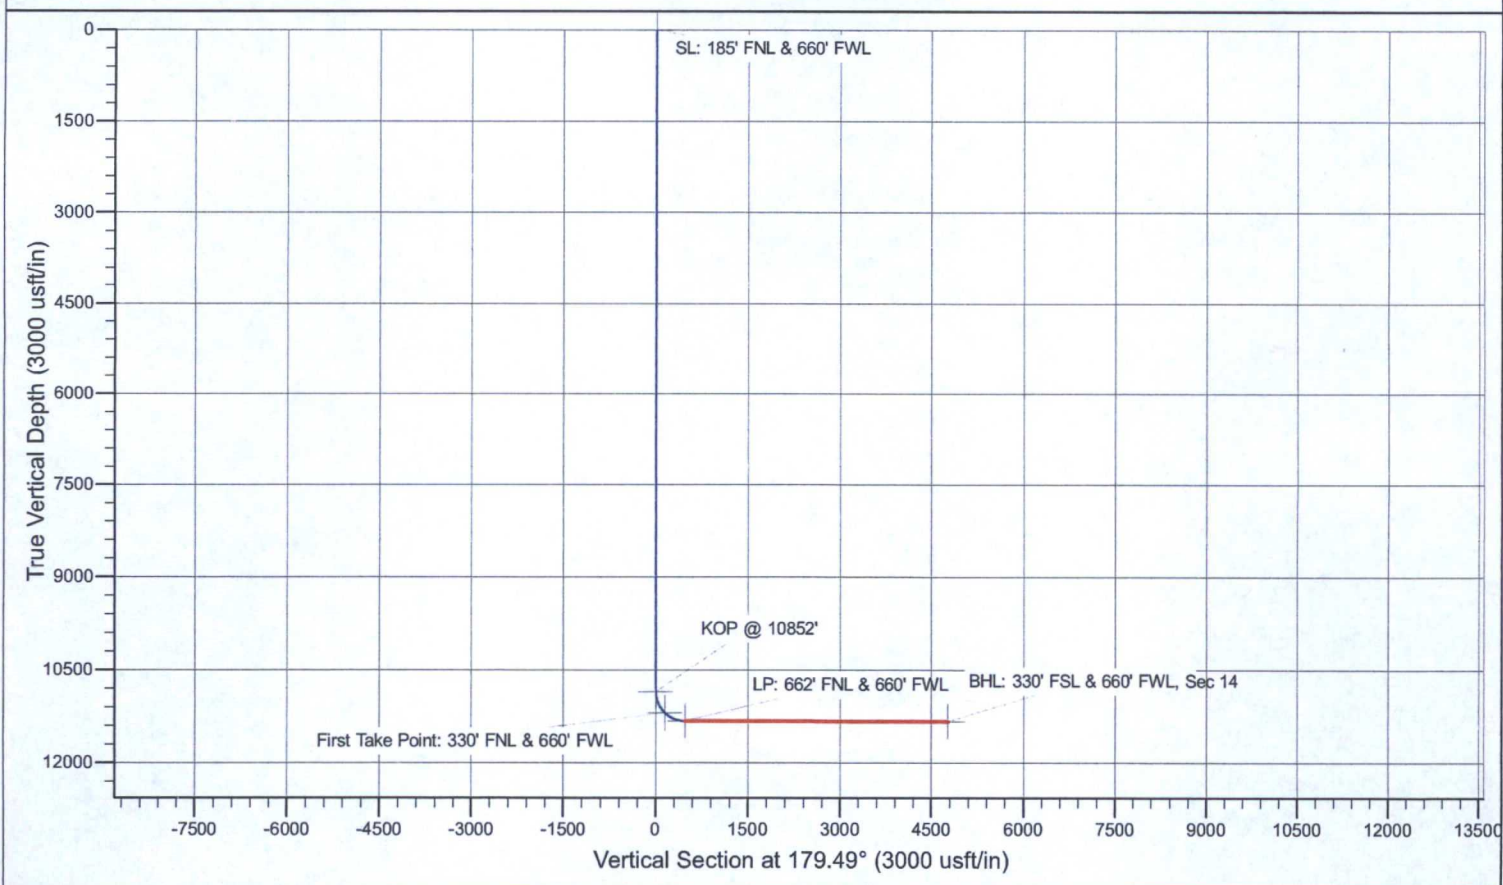


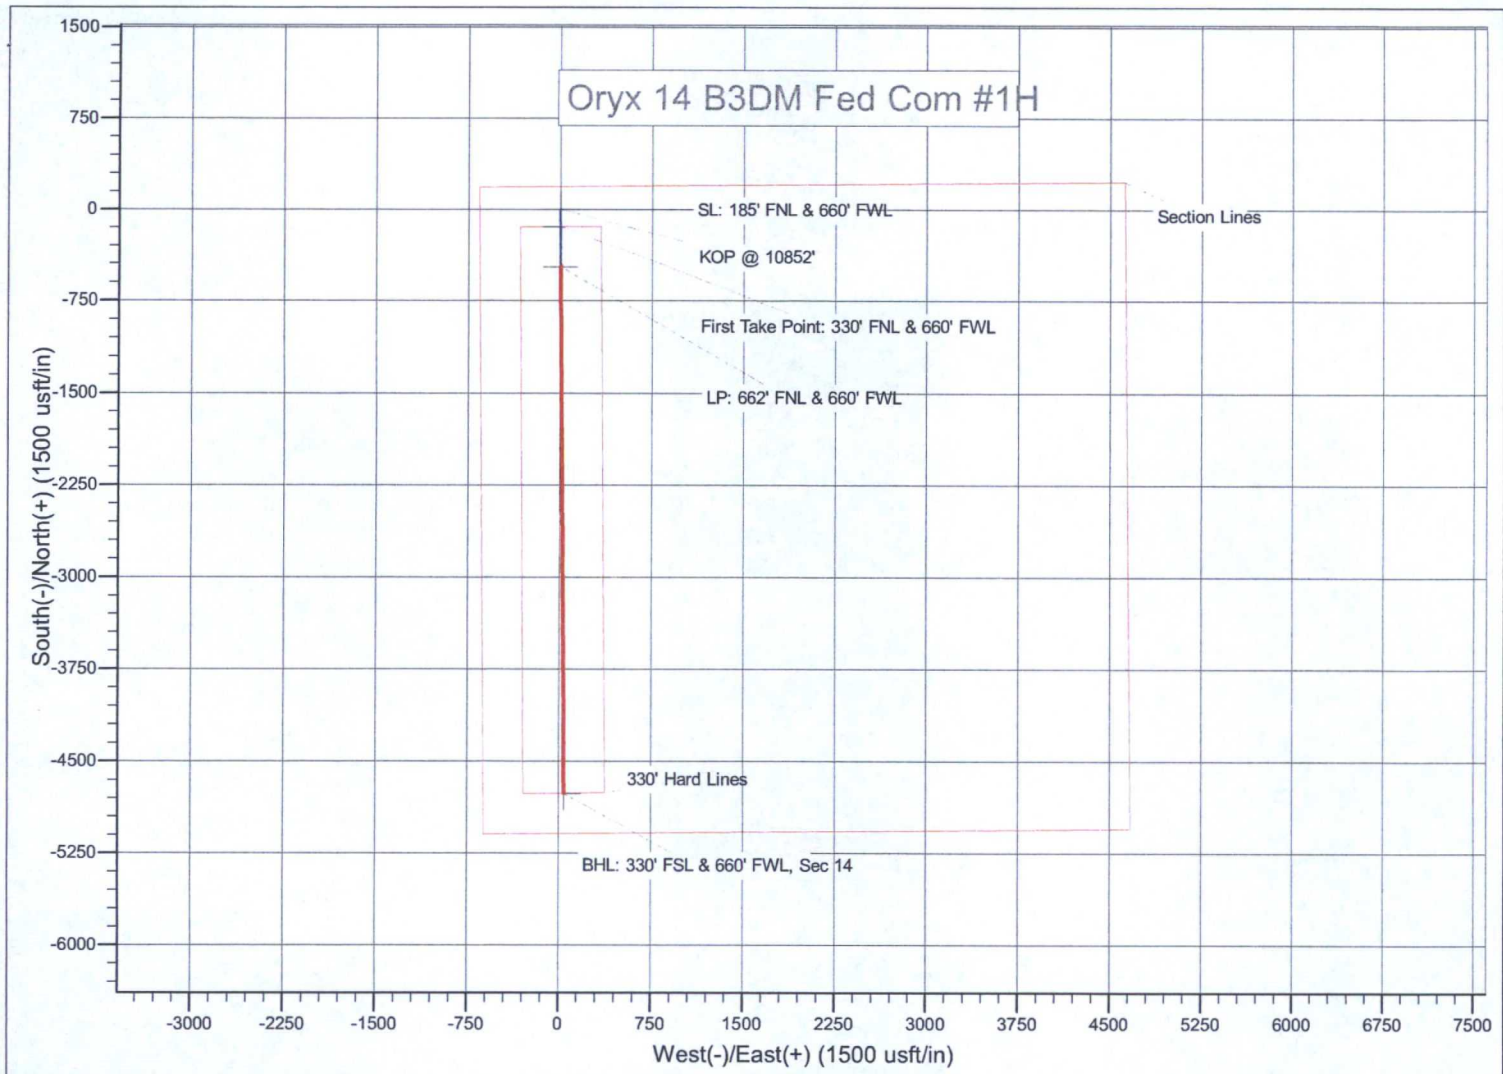

Mewbourne Oil Company

Lea County, New Mexico

Oryx 14 B3DM Fed Com #1H

Sec 14, T23S, R34E

SL: 185' FNL & 660' FWL

BHL: 330' FSL & 660' FWL

Plan: Design #1

Standard Planning Report

29 September, 2015

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Oryx 14 B3DM Fed Com #1H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3400.0usft (Original Well Elev)
Project:	Lea County, New Mexico	MD Reference:	WELL @ 3400.0usft (Original Well Elev)
Site:	Oryx 14 B3DM Fed Com #1H	North Reference:	Grid
Well:	Sec 14, T23S, R34E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 330' FSL & 660' FWL		
Design:	Design #1		

Project	Lea County, New Mexico		
Map System:	US State Plane 1927 (Exact solution)	System Datum:	Mean Sea Level
Geo Datum:	NAD 1927 (NADCON CONUS)		
Map Zone:	New Mexico East 3001		

Site	Oryx 14 B3DM Fed Com #1H		
Site Position:		Northing:	478,077.00 usft
From:	Map	Easting:	773,894.00 usft
Position Uncertainty:	0.0 usft	Slot Radius:	13-3/16 "
		Latitude:	32° 18' 40.450 N
		Longitude:	103° 26' 48.468 W
		Grid Convergence:	0.47 °

Well	Sec 14, T23S, R34E		
Well Position	+N/-S	0.0 usft	Northing:
	+E/-W	0.0 usft	Easting:
Position Uncertainty	0.0 usft	Wellhead Elevation:	3,400.0 usft
		Latitude:	32° 18' 40.450 N
		Longitude:	103° 26' 48.468 W
		Ground Level:	3,373.0 usft

Wellbore	BHL: 330' FSL & 660' FWL		
Magnetics	Model Name	Sample Date	Declination
			(°)
	IGRF2010	9/29/2015	7.00
			Dip Angle
			(°)
			60.18
			Field Strength
			(nT)
			48,253

Design	Design #1		
Audit Notes:			
Version:	Phase:	PROTOTYPE	Tie On Depth:
			0.0
Vertical Section:	Depth From (TVD)	+N/-S	+E/-W
	(usft)	(usft)	(usft)
	0.0	0.0	0.0
			Direction
			(°)
			179.49

Plan Sections											
Measured	Inclination	Azimuth	Vertical	+N/-S	+E/-W	Dogleg	Build	Turn	TFO	Target	
Depth	(°)	(°)	Depth	(usft)	(usft)	Rate	Rate	Rate	(°)		
(usft)			(usft)			(°/100usft)	(°/100usft)	(°/100usft)			
0.0	0.00	0.00	0.0	0.0	0.0	0.00	0.00	0.00	0.00		
10,851.5	0.00	0.00	10,851.5	0.0	0.0	0.00	0.00	0.00	0.00		
11,601.1	89.95	179.49	11,329.0	-477.0	4.2	12.00	12.00	0.00	179.49		
15,888.3	89.95	179.49	11,333.0	-4,764.0	42.0	0.00	0.00	0.00	0.00	0.00	BHL: 330' FSL & 660'

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Oryx 14 B3DM Fed Com #1H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3400.0usft (Original Well Elev)
Project:	Lea County, New Mexico	MD Reference:	WELL @ 3400.0usft (Original Well Elev)
Site:	Oryx 14 B3DM Fed Com #1H	North Reference:	Grid
Well:	Sec 14, T23S, R34E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 330' FSL & 660' FWL		
Design:	Design #1		

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
0.0	0.00	0.00	0.0	0.0	0.0	0.0	0.00	0.00	0.00
SL: 185' FNL & 660' FWL									
100.0	0.00	0.00	100.0	0.0	0.0	0.0	0.00	0.00	0.00
200.0	0.00	0.00	200.0	0.0	0.0	0.0	0.00	0.00	0.00
300.0	0.00	0.00	300.0	0.0	0.0	0.0	0.00	0.00	0.00
400.0	0.00	0.00	400.0	0.0	0.0	0.0	0.00	0.00	0.00
500.0	0.00	0.00	500.0	0.0	0.0	0.0	0.00	0.00	0.00
600.0	0.00	0.00	600.0	0.0	0.0	0.0	0.00	0.00	0.00
700.0	0.00	0.00	700.0	0.0	0.0	0.0	0.00	0.00	0.00
800.0	0.00	0.00	800.0	0.0	0.0	0.0	0.00	0.00	0.00
900.0	0.00	0.00	900.0	0.0	0.0	0.0	0.00	0.00	0.00
1,000.0	0.00	0.00	1,000.0	0.0	0.0	0.0	0.00	0.00	0.00
1,100.0	0.00	0.00	1,100.0	0.0	0.0	0.0	0.00	0.00	0.00
1,200.0	0.00	0.00	1,200.0	0.0	0.0	0.0	0.00	0.00	0.00
1,300.0	0.00	0.00	1,300.0	0.0	0.0	0.0	0.00	0.00	0.00
1,400.0	0.00	0.00	1,400.0	0.0	0.0	0.0	0.00	0.00	0.00
1,500.0	0.00	0.00	1,500.0	0.0	0.0	0.0	0.00	0.00	0.00
1,600.0	0.00	0.00	1,600.0	0.0	0.0	0.0	0.00	0.00	0.00
1,700.0	0.00	0.00	1,700.0	0.0	0.0	0.0	0.00	0.00	0.00
1,800.0	0.00	0.00	1,800.0	0.0	0.0	0.0	0.00	0.00	0.00
1,900.0	0.00	0.00	1,900.0	0.0	0.0	0.0	0.00	0.00	0.00
2,000.0	0.00	0.00	2,000.0	0.0	0.0	0.0	0.00	0.00	0.00
2,100.0	0.00	0.00	2,100.0	0.0	0.0	0.0	0.00	0.00	0.00
2,200.0	0.00	0.00	2,200.0	0.0	0.0	0.0	0.00	0.00	0.00
2,300.0	0.00	0.00	2,300.0	0.0	0.0	0.0	0.00	0.00	0.00
2,400.0	0.00	0.00	2,400.0	0.0	0.0	0.0	0.00	0.00	0.00
2,500.0	0.00	0.00	2,500.0	0.0	0.0	0.0	0.00	0.00	0.00
2,600.0	0.00	0.00	2,600.0	0.0	0.0	0.0	0.00	0.00	0.00
2,700.0	0.00	0.00	2,700.0	0.0	0.0	0.0	0.00	0.00	0.00
2,800.0	0.00	0.00	2,800.0	0.0	0.0	0.0	0.00	0.00	0.00
2,900.0	0.00	0.00	2,900.0	0.0	0.0	0.0	0.00	0.00	0.00
3,000.0	0.00	0.00	3,000.0	0.0	0.0	0.0	0.00	0.00	0.00
3,100.0	0.00	0.00	3,100.0	0.0	0.0	0.0	0.00	0.00	0.00
3,200.0	0.00	0.00	3,200.0	0.0	0.0	0.0	0.00	0.00	0.00
3,300.0	0.00	0.00	3,300.0	0.0	0.0	0.0	0.00	0.00	0.00
3,400.0	0.00	0.00	3,400.0	0.0	0.0	0.0	0.00	0.00	0.00
3,500.0	0.00	0.00	3,500.0	0.0	0.0	0.0	0.00	0.00	0.00
3,600.0	0.00	0.00	3,600.0	0.0	0.0	0.0	0.00	0.00	0.00
3,700.0	0.00	0.00	3,700.0	0.0	0.0	0.0	0.00	0.00	0.00
3,800.0	0.00	0.00	3,800.0	0.0	0.0	0.0	0.00	0.00	0.00
3,900.0	0.00	0.00	3,900.0	0.0	0.0	0.0	0.00	0.00	0.00
4,000.0	0.00	0.00	4,000.0	0.0	0.0	0.0	0.00	0.00	0.00
4,100.0	0.00	0.00	4,100.0	0.0	0.0	0.0	0.00	0.00	0.00
4,200.0	0.00	0.00	4,200.0	0.0	0.0	0.0	0.00	0.00	0.00
4,300.0	0.00	0.00	4,300.0	0.0	0.0	0.0	0.00	0.00	0.00
4,400.0	0.00	0.00	4,400.0	0.0	0.0	0.0	0.00	0.00	0.00
4,500.0	0.00	0.00	4,500.0	0.0	0.0	0.0	0.00	0.00	0.00
4,600.0	0.00	0.00	4,600.0	0.0	0.0	0.0	0.00	0.00	0.00
4,700.0	0.00	0.00	4,700.0	0.0	0.0	0.0	0.00	0.00	0.00
4,800.0	0.00	0.00	4,800.0	0.0	0.0	0.0	0.00	0.00	0.00
4,900.0	0.00	0.00	4,900.0	0.0	0.0	0.0	0.00	0.00	0.00
5,000.0	0.00	0.00	5,000.0	0.0	0.0	0.0	0.00	0.00	0.00
5,100.0	0.00	0.00	5,100.0	0.0	0.0	0.0	0.00	0.00	0.00
5,200.0	0.00	0.00	5,200.0	0.0	0.0	0.0	0.00	0.00	0.00

Planning Report

Database: Hobbs
 Company: Mewbourne Oil Company
 Project: Lea County, New Mexico
 Site: Oryx 14 B3DM Fed Com #1H
 Well: Sec 14, T23S, R34E
 Wellbore: BHL: 330' FSL & 660' FWL
 Design: Design #1

Local Co-ordinate Reference: Site Oryx 14 B3DM Fed Com #1H
 TVD Reference: WELL @ 3400.0usft (Original Well Elev)
 MD Reference: WELL @ 3400.0usft (Original Well Elev)
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
5,300.0	0.00	0.00	5,300.0	0.0	0.0	0.0	0.00	0.00	0.00
5,400.0	0.00	0.00	5,400.0	0.0	0.0	0.0	0.00	0.00	0.00
5,500.0	0.00	0.00	5,500.0	0.0	0.0	0.0	0.00	0.00	0.00
5,600.0	0.00	0.00	5,600.0	0.0	0.0	0.0	0.00	0.00	0.00
5,700.0	0.00	0.00	5,700.0	0.0	0.0	0.0	0.00	0.00	0.00
5,800.0	0.00	0.00	5,800.0	0.0	0.0	0.0	0.00	0.00	0.00
5,900.0	0.00	0.00	5,900.0	0.0	0.0	0.0	0.00	0.00	0.00
6,000.0	0.00	0.00	6,000.0	0.0	0.0	0.0	0.00	0.00	0.00
6,100.0	0.00	0.00	6,100.0	0.0	0.0	0.0	0.00	0.00	0.00
6,200.0	0.00	0.00	6,200.0	0.0	0.0	0.0	0.00	0.00	0.00
6,300.0	0.00	0.00	6,300.0	0.0	0.0	0.0	0.00	0.00	0.00
6,400.0	0.00	0.00	6,400.0	0.0	0.0	0.0	0.00	0.00	0.00
6,500.0	0.00	0.00	6,500.0	0.0	0.0	0.0	0.00	0.00	0.00
6,600.0	0.00	0.00	6,600.0	0.0	0.0	0.0	0.00	0.00	0.00
6,700.0	0.00	0.00	6,700.0	0.0	0.0	0.0	0.00	0.00	0.00
6,800.0	0.00	0.00	6,800.0	0.0	0.0	0.0	0.00	0.00	0.00
6,900.0	0.00	0.00	6,900.0	0.0	0.0	0.0	0.00	0.00	0.00
7,000.0	0.00	0.00	7,000.0	0.0	0.0	0.0	0.00	0.00	0.00
7,100.0	0.00	0.00	7,100.0	0.0	0.0	0.0	0.00	0.00	0.00
7,200.0	0.00	0.00	7,200.0	0.0	0.0	0.0	0.00	0.00	0.00
7,300.0	0.00	0.00	7,300.0	0.0	0.0	0.0	0.00	0.00	0.00
7,400.0	0.00	0.00	7,400.0	0.0	0.0	0.0	0.00	0.00	0.00
7,500.0	0.00	0.00	7,500.0	0.0	0.0	0.0	0.00	0.00	0.00
7,600.0	0.00	0.00	7,600.0	0.0	0.0	0.0	0.00	0.00	0.00
7,700.0	0.00	0.00	7,700.0	0.0	0.0	0.0	0.00	0.00	0.00
7,800.0	0.00	0.00	7,800.0	0.0	0.0	0.0	0.00	0.00	0.00
7,900.0	0.00	0.00	7,900.0	0.0	0.0	0.0	0.00	0.00	0.00
8,000.0	0.00	0.00	8,000.0	0.0	0.0	0.0	0.00	0.00	0.00
8,100.0	0.00	0.00	8,100.0	0.0	0.0	0.0	0.00	0.00	0.00
8,200.0	0.00	0.00	8,200.0	0.0	0.0	0.0	0.00	0.00	0.00
8,300.0	0.00	0.00	8,300.0	0.0	0.0	0.0	0.00	0.00	0.00
8,400.0	0.00	0.00	8,400.0	0.0	0.0	0.0	0.00	0.00	0.00
8,500.0	0.00	0.00	8,500.0	0.0	0.0	0.0	0.00	0.00	0.00
8,600.0	0.00	0.00	8,600.0	0.0	0.0	0.0	0.00	0.00	0.00
8,700.0	0.00	0.00	8,700.0	0.0	0.0	0.0	0.00	0.00	0.00
8,800.0	0.00	0.00	8,800.0	0.0	0.0	0.0	0.00	0.00	0.00
8,900.0	0.00	0.00	8,900.0	0.0	0.0	0.0	0.00	0.00	0.00
9,000.0	0.00	0.00	9,000.0	0.0	0.0	0.0	0.00	0.00	0.00
9,100.0	0.00	0.00	9,100.0	0.0	0.0	0.0	0.00	0.00	0.00
9,200.0	0.00	0.00	9,200.0	0.0	0.0	0.0	0.00	0.00	0.00
9,300.0	0.00	0.00	9,300.0	0.0	0.0	0.0	0.00	0.00	0.00
9,400.0	0.00	0.00	9,400.0	0.0	0.0	0.0	0.00	0.00	0.00
9,500.0	0.00	0.00	9,500.0	0.0	0.0	0.0	0.00	0.00	0.00
9,600.0	0.00	0.00	9,600.0	0.0	0.0	0.0	0.00	0.00	0.00
9,700.0	0.00	0.00	9,700.0	0.0	0.0	0.0	0.00	0.00	0.00
9,800.0	0.00	0.00	9,800.0	0.0	0.0	0.0	0.00	0.00	0.00
9,900.0	0.00	0.00	9,900.0	0.0	0.0	0.0	0.00	0.00	0.00
10,000.0	0.00	0.00	10,000.0	0.0	0.0	0.0	0.00	0.00	0.00
10,100.0	0.00	0.00	10,100.0	0.0	0.0	0.0	0.00	0.00	0.00
10,200.0	0.00	0.00	10,200.0	0.0	0.0	0.0	0.00	0.00	0.00
10,300.0	0.00	0.00	10,300.0	0.0	0.0	0.0	0.00	0.00	0.00
10,400.0	0.00	0.00	10,400.0	0.0	0.0	0.0	0.00	0.00	0.00
10,500.0	0.00	0.00	10,500.0	0.0	0.0	0.0	0.00	0.00	0.00
10,600.0	0.00	0.00	10,600.0	0.0	0.0	0.0	0.00	0.00	0.00

Planning Report

Database: Hobbs
 Company: Mewbourne Oil Company
 Project: Lea County, New Mexico
 Site: Oryx 14 B3DM Fed Com #1H
 Well: Sec 14, T23S, R34E
 Wellbore: BHL: 330' FSL & 660' FWL
 Design: Design #1

Local Co-ordinate Reference: Site Oryx 14 B3DM Fed Com #1H
 TVD Reference: WELL @ 3400.0usft (Original Well Elev)
 MD Reference: WELL @ 3400.0usft (Original Well Elev)
 North Reference: Grid
 Survey Calculation Method: Minimum Curvature

Planned Survey

Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)
10,700.0	0.00	0.00	10,700.0	0.0	0.0	0.0	0.00	0.00	0.00
10,800.0	0.00	0.00	10,800.0	0.0	0.0	0.0	0.00	0.00	0.00
10,851.5	0.00	0.00	10,851.5	0.0	0.0	0.0	0.00	0.00	0.00
KOP @ 10852'									
10,900.0	5.82	179.49	10,899.9	-2.5	0.0	2.5	12.00	12.00	0.00
11,000.0	17.82	179.49	10,997.6	-22.9	0.2	22.9	12.00	12.00	0.00
11,100.0	29.82	179.49	11,088.9	-63.2	0.6	63.2	12.00	12.00	0.00
11,200.0	41.82	179.49	11,169.9	-121.6	1.1	121.6	12.00	12.00	0.00
11,233.8	45.87	179.49	11,194.2	-145.0	1.3	145.0	12.00	12.00	0.00
First Take Point: 330' FNL & 660' FWL									
11,300.0	53.82	179.49	11,236.9	-195.6	1.7	195.6	12.00	12.00	0.00
11,400.0	65.82	179.49	11,287.1	-281.8	2.5	281.9	12.00	12.00	0.00
11,500.0	77.82	179.49	11,318.2	-376.7	3.3	376.7	12.00	12.00	0.00
11,600.0	89.82	179.49	11,329.0	-475.9	4.2	475.9	12.00	12.00	0.00
11,601.1	89.95	179.49	11,329.0	-477.0	4.2	477.0	11.98	11.98	0.00
LP: 662' FNL & 660' FWL									
11,700.0	89.95	179.49	11,329.1	-575.9	5.1	575.9	0.00	0.00	0.00
11,800.0	89.95	179.49	11,329.2	-675.9	6.0	675.9	0.00	0.00	0.00
11,900.0	89.95	179.49	11,329.3	-775.9	6.8	775.9	0.00	0.00	0.00
12,000.0	89.95	179.49	11,329.4	-875.9	7.7	875.9	0.00	0.00	0.00
12,100.0	89.95	179.49	11,329.5	-975.9	8.6	975.9	0.00	0.00	0.00
12,200.0	89.95	179.49	11,329.6	-1,075.9	9.5	1,075.9	0.00	0.00	0.00
12,300.0	89.95	179.49	11,329.7	-1,175.9	10.4	1,175.9	0.00	0.00	0.00
12,400.0	89.95	179.49	11,329.7	-1,275.9	11.2	1,275.9	0.00	0.00	0.00
12,500.0	89.95	179.49	11,329.8	-1,375.9	12.1	1,375.9	0.00	0.00	0.00
12,600.0	89.95	179.49	11,329.9	-1,475.9	13.0	1,475.9	0.00	0.00	0.00
12,700.0	89.95	179.49	11,330.0	-1,575.9	13.9	1,575.9	0.00	0.00	0.00
12,800.0	89.95	179.49	11,330.1	-1,675.9	14.8	1,675.9	0.00	0.00	0.00
12,900.0	89.95	179.49	11,330.2	-1,775.9	15.7	1,775.9	0.00	0.00	0.00
13,000.0	89.95	179.49	11,330.3	-1,875.9	16.5	1,875.9	0.00	0.00	0.00
13,100.0	89.95	179.49	11,330.4	-1,975.9	17.4	1,975.9	0.00	0.00	0.00
13,200.0	89.95	179.49	11,330.5	-2,075.8	18.3	2,075.9	0.00	0.00	0.00
13,300.0	89.95	179.49	11,330.6	-2,175.8	19.2	2,175.9	0.00	0.00	0.00
13,400.0	89.95	179.49	11,330.7	-2,275.8	20.1	2,275.9	0.00	0.00	0.00
13,500.0	89.95	179.49	11,330.8	-2,375.8	20.9	2,375.9	0.00	0.00	0.00
13,600.0	89.95	179.49	11,330.9	-2,475.8	21.8	2,475.9	0.00	0.00	0.00
13,700.0	89.95	179.49	11,331.0	-2,575.8	22.7	2,575.9	0.00	0.00	0.00
13,800.0	89.95	179.49	11,331.1	-2,675.8	23.6	2,675.9	0.00	0.00	0.00
13,900.0	89.95	179.49	11,331.1	-2,775.8	24.5	2,775.9	0.00	0.00	0.00
14,000.0	89.95	179.49	11,331.2	-2,875.8	25.4	2,875.9	0.00	0.00	0.00
14,100.0	89.95	179.49	11,331.3	-2,975.8	26.2	2,975.9	0.00	0.00	0.00
14,200.0	89.95	179.49	11,331.4	-3,075.8	27.1	3,075.9	0.00	0.00	0.00
14,300.0	89.95	179.49	11,331.5	-3,175.8	28.0	3,175.9	0.00	0.00	0.00
14,400.0	89.95	179.49	11,331.6	-3,275.8	28.9	3,275.9	0.00	0.00	0.00
14,500.0	89.95	179.49	11,331.7	-3,375.8	29.8	3,375.9	0.00	0.00	0.00
14,600.0	89.95	179.49	11,331.8	-3,475.8	30.6	3,475.9	0.00	0.00	0.00
14,700.0	89.95	179.49	11,331.9	-3,575.8	31.5	3,575.9	0.00	0.00	0.00
14,800.0	89.95	179.49	11,332.0	-3,675.8	32.4	3,675.9	0.00	0.00	0.00
14,900.0	89.95	179.49	11,332.1	-3,775.8	33.3	3,775.9	0.00	0.00	0.00
15,000.0	89.95	179.49	11,332.2	-3,875.8	34.2	3,875.9	0.00	0.00	0.00
15,100.0	89.95	179.49	11,332.3	-3,975.8	35.1	3,975.9	0.00	0.00	0.00
15,200.0	89.95	179.49	11,332.4	-4,075.8	35.9	4,075.9	0.00	0.00	0.00
15,300.0	89.95	179.49	11,332.5	-4,175.8	36.8	4,175.9	0.00	0.00	0.00

Planning Report

Database:	Hobbs	Local Co-ordinate Reference:	Site Oryx 14 B3DM Fed Com #1H
Company:	Mewbourne Oil Company	TVD Reference:	WELL @ 3400.0usft (Original Well Elev)
Project:	Lea County, New Mexico	MD Reference:	WELL @ 3400.0usft (Original Well Elev)
Site:	Oryx 14 B3DM Fed Com #1H	North Reference:	Grid
Well:	Sec 14, T23S, R34E	Survey Calculation Method:	Minimum Curvature
Wellbore:	BHL: 330' FSL & 660' FWL		
Design:	Design #1		

Planned Survey										
Measured Depth (usft)	Inclination (°)	Azimuth (°)	Vertical Depth (usft)	+N/-S (usft)	+E/-W (usft)	Vertical Section (usft)	Dogleg Rate (°/100usft)	Build Rate (°/100usft)	Turn Rate (°/100usft)	
15,400.0	89.95	179.49	11,332.5	-4,275.8	37.7	4,275.9	0.00	0.00	0.00	
15,500.0	89.95	179.49	11,332.6	-4,375.8	38.6	4,375.9	0.00	0.00	0.00	
15,600.0	89.95	179.49	11,332.7	-4,475.8	39.5	4,475.9	0.00	0.00	0.00	
15,700.0	89.95	179.49	11,332.8	-4,575.7	40.3	4,575.9	0.00	0.00	0.00	
15,800.0	89.95	179.49	11,332.9	-4,675.7	41.2	4,675.9	0.00	0.00	0.00	
15,888.3	89.95	179.49	11,333.0	-4,764.0	42.0	4,764.2	0.00	0.00	0.00	
BHL: 330' FSL & 660' FWL, Sec 14										

Design Targets										
Target Name - hit/miss target - Shape	Dip Angle (°)	Dip Dir. (°)	TVD (usft)	+N/-S (usft)	+E/-W (usft)	Northing (usft)	Easting (usft)	Latitude	Longitude	
SL: 185' FNL & 660' FW - plan hits target center - Point	0.00	0.00	0.0	0.0	0.0	478,077.00	773,894.00	32° 18' 40.450 N	103° 26' 48.468 W	
KOP @ 10852' - plan hits target center - Point	0.00	0.00	10,851.5	0.0	0.0	478,077.00	773,894.00	32° 18' 40.450 N	103° 26' 48.468 W	
First Take Point: 330' FN - plan hits target center - Point	0.00	0.00	11,194.2	-145.0	1.3	477,932.00	773,895.28	32° 18' 39.016 N	103° 26' 48.467 W	
LP: 662' FNL & 660' FW - plan misses target center by 2.0usft at 11601.1usft MD (11329.0 TVD, -477.0 N, 4.2 E) - Point	0.00	0.00	11,327.0	-477.0	4.2	477,600.00	773,898.20	32° 18' 35.730 N	103° 26' 48.465 W	
BHL: 330' FSL & 660' Fv - plan hits target center - Point	0.00	0.00	11,333.0	-4,764.0	42.0	473,313.00	773,936.00	32° 17' 53.307 N	103° 26' 48.438 W	